
Product catalogue 2010 - 2011



ARTECTA®
THE ART OF LIGHTING

ARTECTA.
THE ART OF LIGHTING

The Art of Lighting

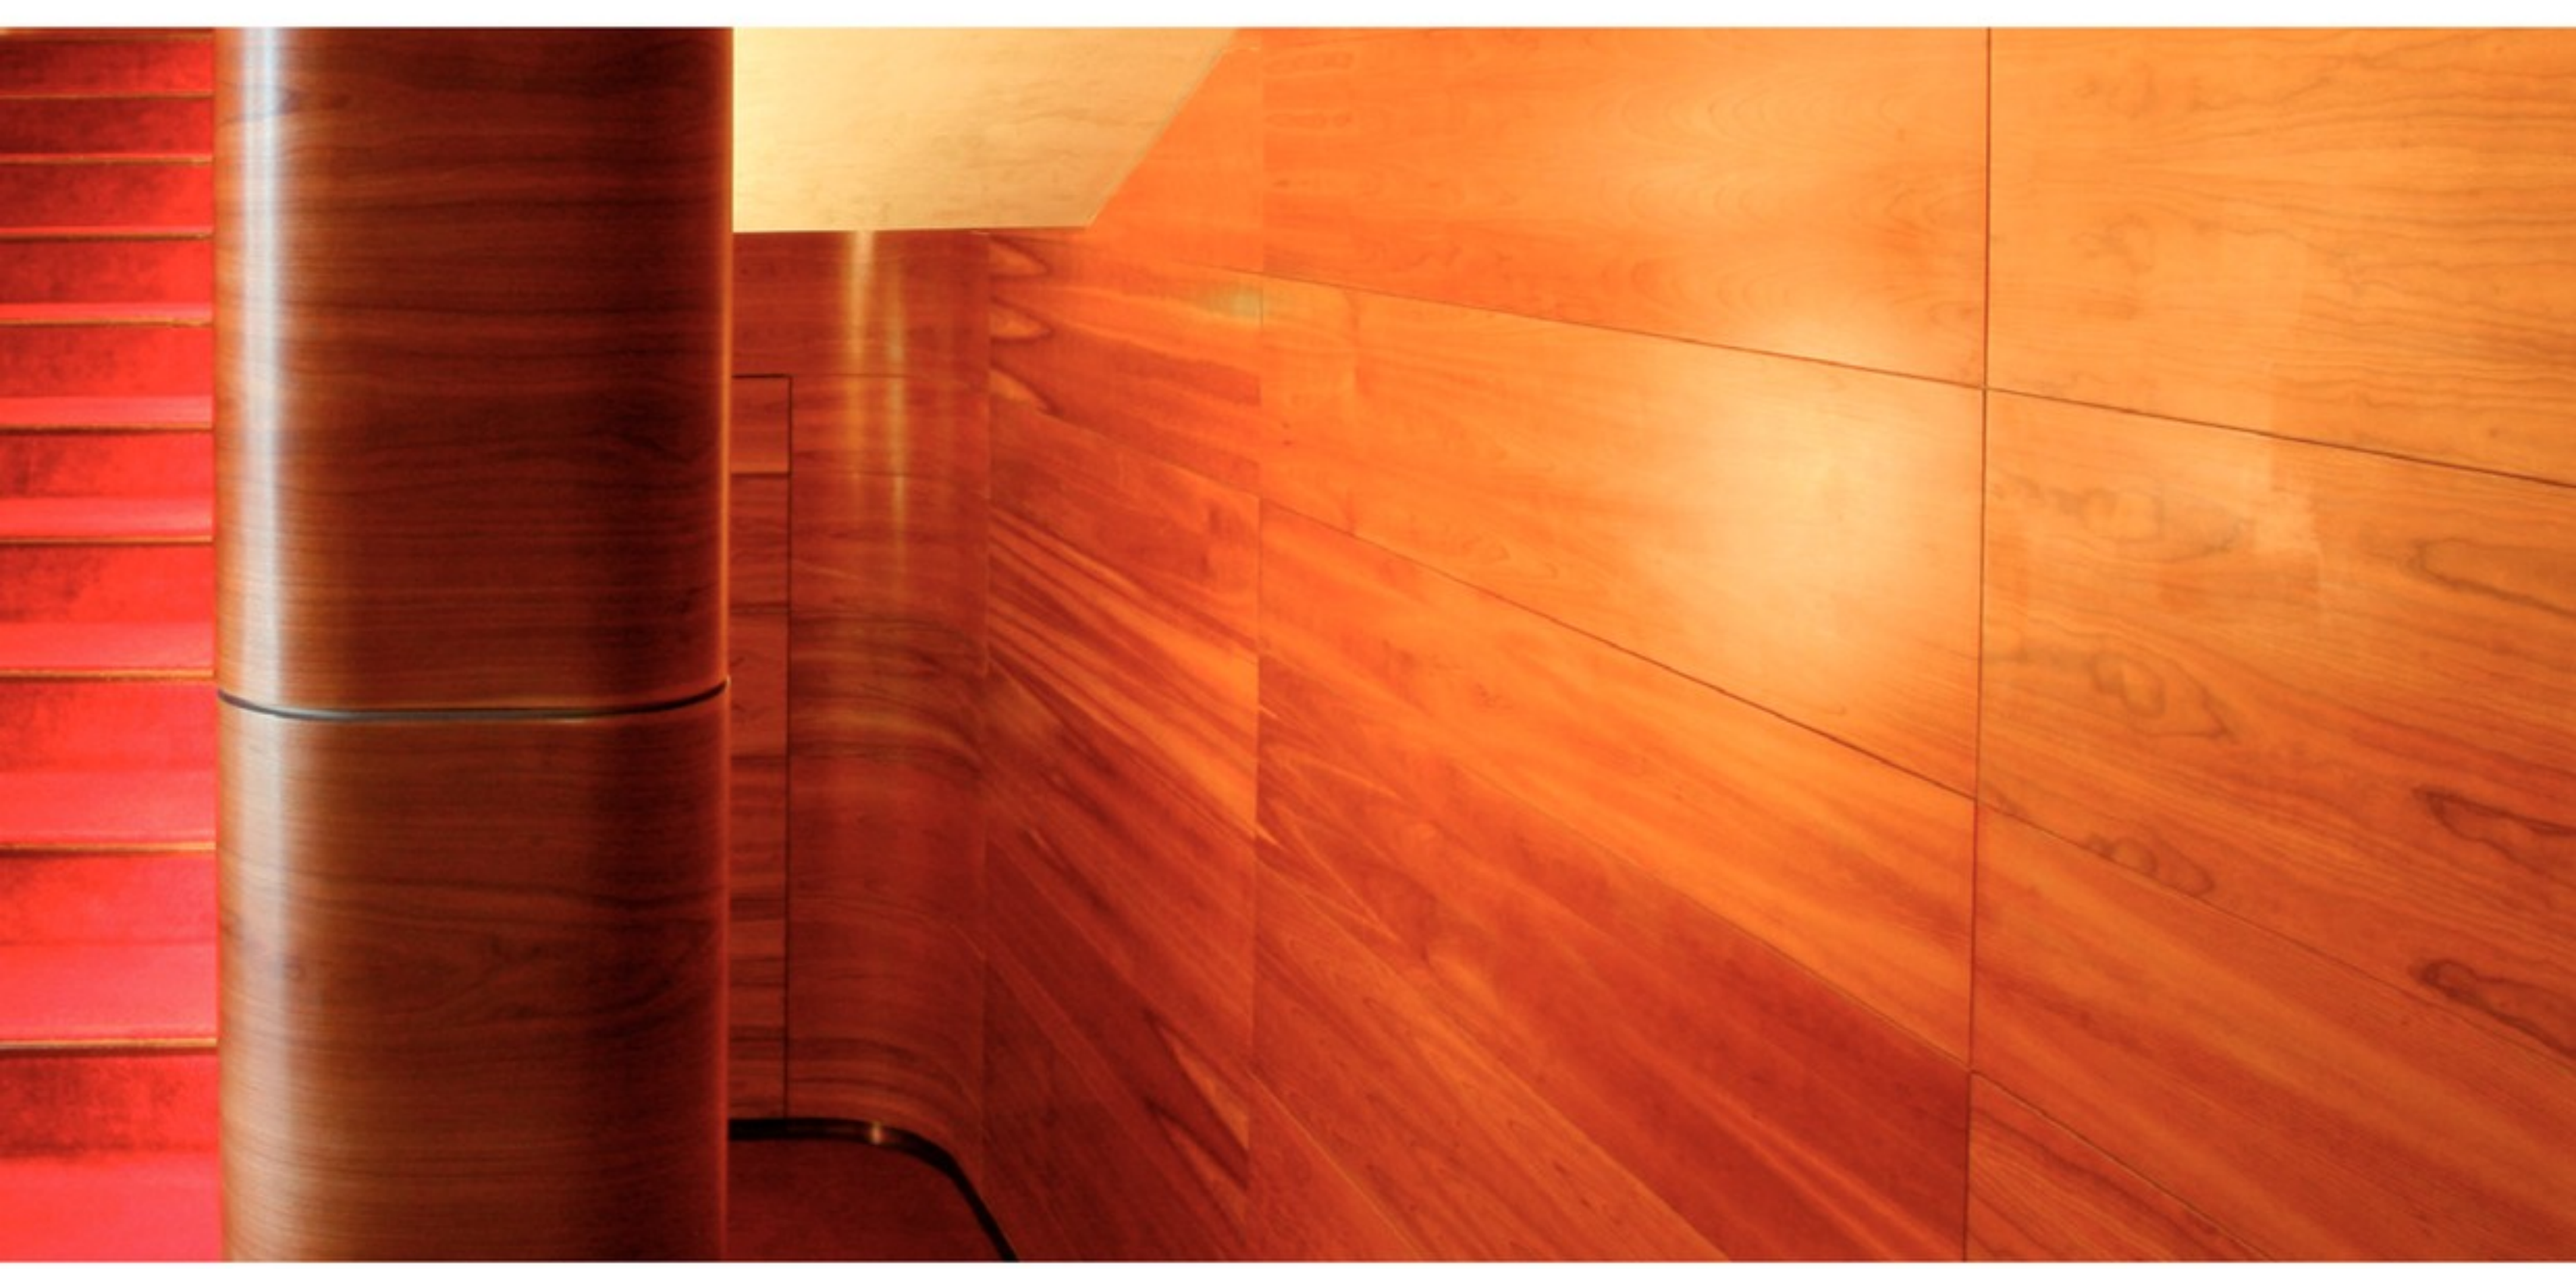

With the start of a new decennium the cry for more commitment to the environment becomes louder every day.
The time of a limitless energy-source lies behind us and everyone should make it's own contribution to a better world.
Artecta takes it's full responsibility and is willing to commit itself to save energy. That's why we massively switch to the new and more environment-friendly LED technology.
Not only did we add a complete new line-up of LED products but we also upgraded the existing ones so that they can be used with LED's.

These efforts will ensure less power-consumption and heat-production but without any sacrifice to design or functionality. We take great proud in presenting you this new Artecta product-catalogue and hope that we can inspire you to use our products in any professional or creative environment where the use of reliable, stylish and yet affordable light-products is needed.

Let's there be light....let there be Artecta.

Table of Contents

Office Lights
Pendant 4
Polelights 10

Down-lights
Spotlights 12
Pendant 14
Recessed 20
Surface 44

Wall-lights
Spotlights 50
Recessed 56
Surface 67

Track-lights
1-Phase tracks 98
1-Phase spots 100
3-Phase tracks 104
3-Phase spots 108

Inground spots
Low Voltage 122
High Voltage 130

Underwater Lights
IP-68 140

Garden and Streetlights
24V 148
230V 150

Markers & Signal lights
Recessed 174
Surface 175

Special lightproducts
Graphic Projectors 176

Accessories
Cables & Splitters 178
LED Drivers 179
Ballasts 180
Transformers 181
Controllers 182
Powersupplies 185

Lightbulbs
Halogen Bulbs 186
LED Bulbs 188
Metalhalide Bulbs 189
Fluorescent Bulbs/Tubes 190

Characteristics 192

Icon Index & IP Rating 216

ARTECTA
THE ART OF LIGHTING

Artecta is a registered trademark, all right reserved ®. This is a Highlite International B.V. publication. Design, concept, artwork, text and pictures* are copyright protected and may not be reproduced in any form without prior approval of Highlite International B.V. in the Netherlands. Information in this catalogue is subject to change. Highlite International B.V. has the right to refuse claims based on misprints or typesetting-errors. (* with exception of the unlabled moodimages).
Moodimages do not represent the actual lightcharacteristics produced by Artecta products and are only intended for decorative visual purposes.

Concept, art & design: Graphic Design department. Highlite International B.V.
Labeled images are copyrightprotected. All rights reserved © 2010.



The Art of Lighting






Oregon-254

A0120254

2 x T5 54W HO (High Output)

- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct and indirect light

Included:
- 2x 2 m stainless steel cables
- 1x 2 m power cable
- 2 connection clips
- 2 ceiling canopies

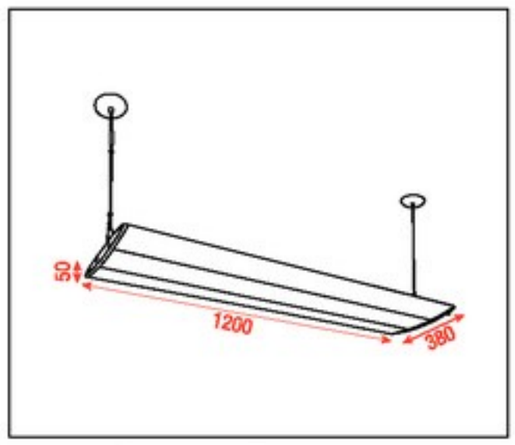


Oregon-235

A0120235

2 x T5 35W HE (High Efficiency)


- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct and indirect light


Included:
- 2x 2 m stainless steel cables
- 1x 2 m power cable
- 2 connection clips
- 2 ceiling canopies

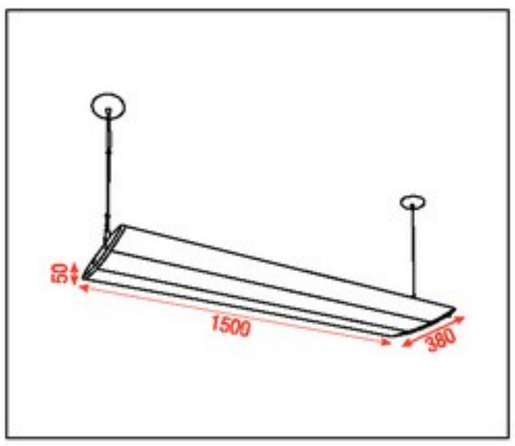





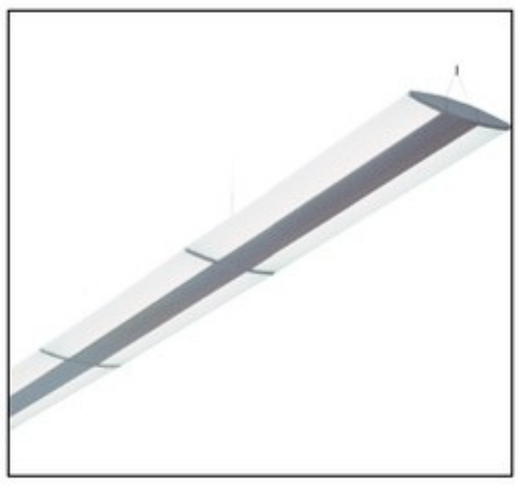

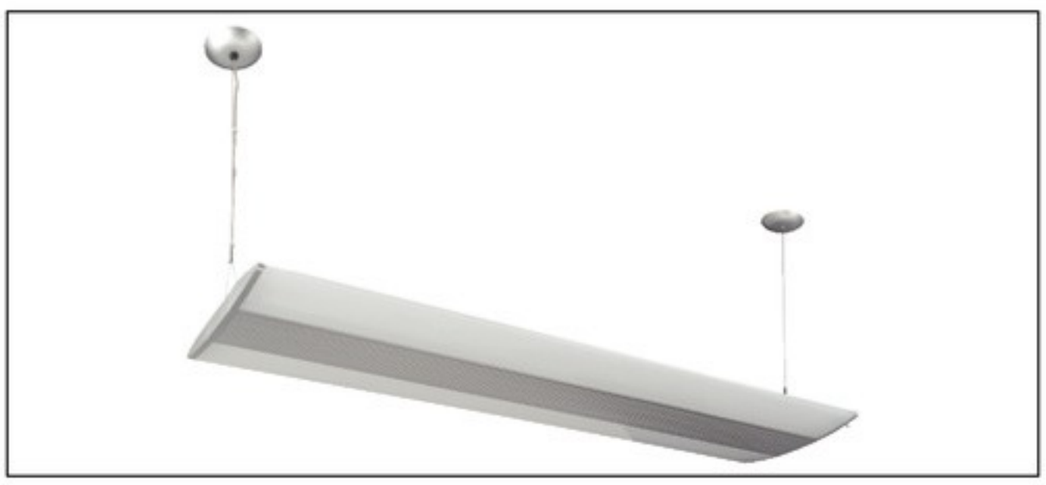

Mounting frame for Oregon for continous rows **A0120230**

Office-lights




Orlando-354

A0121354

3 x T5 54W HO (High Output)

- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct and indirect light

Included:
- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies

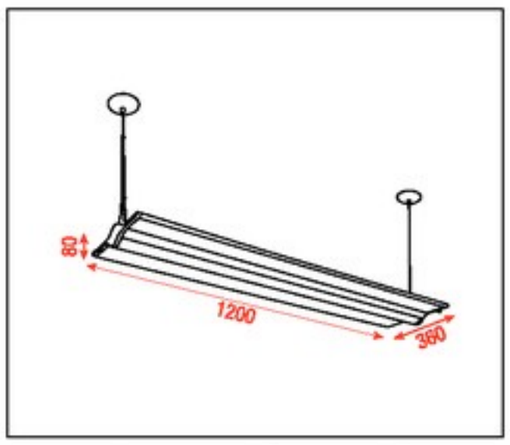


Orlando-335

A0121335

3 x T5 35W HE (High Efficiency)

- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct and indirect light

Included:
- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies

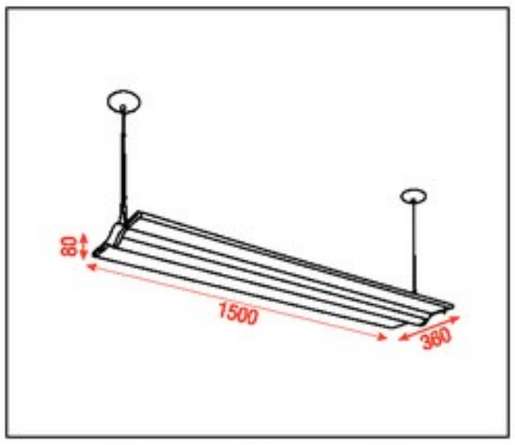











Phoenix-254 **A0121254**

2 x T5 54W HO (High Output)

- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct and indirect light

Included:
- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies


Phoenix-235 **A0121235**


2 x T5 35W HE (High Energy)


- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct and indirect light

Included:
- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies



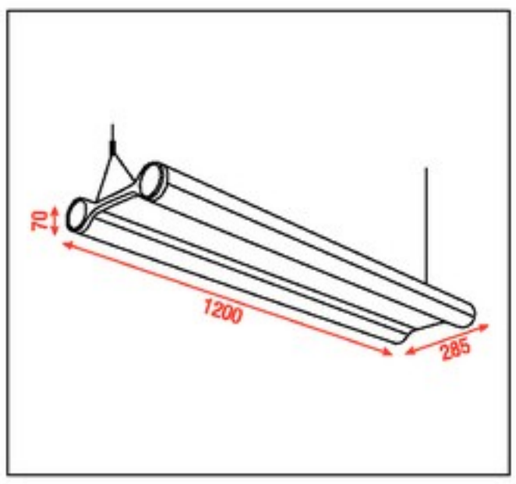

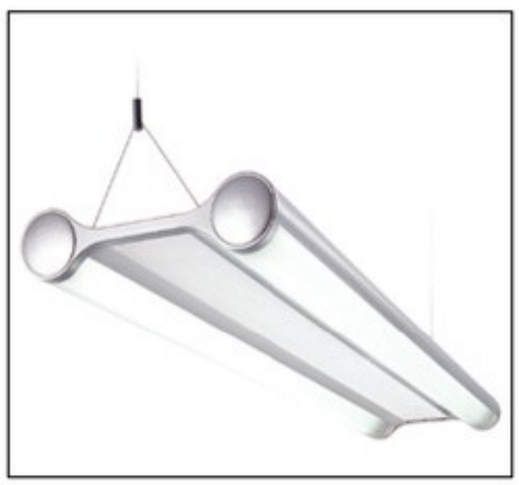

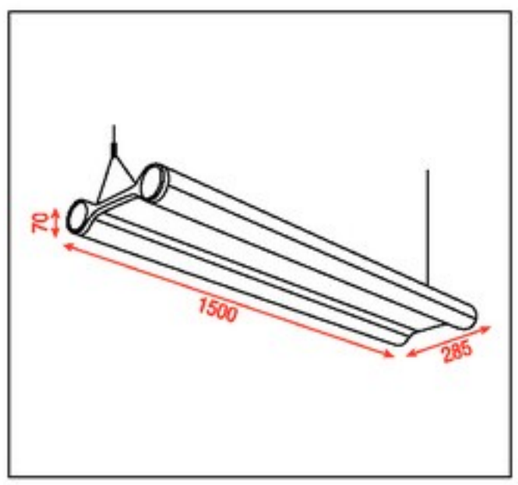



Office-lights





Tulsa-135 **A0122135**

1 x T5 35W HE (High Energy) with PMMA lamp shade

- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct down light

Included:
- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies


Tulsa-135L **A0123135**


1 x T5 35W HE (High Energy) with Louvre lamp shade


- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: Louvre Direct down light

Included:
- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies



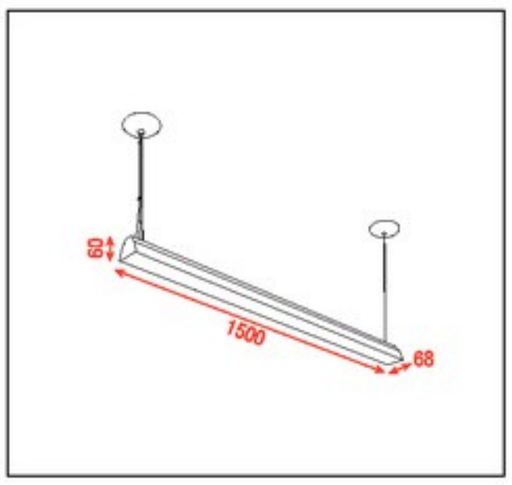

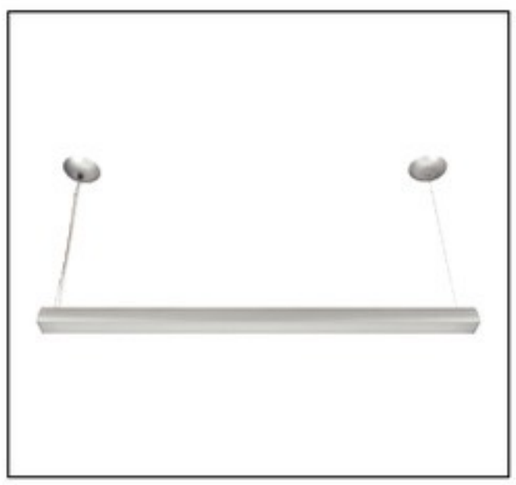

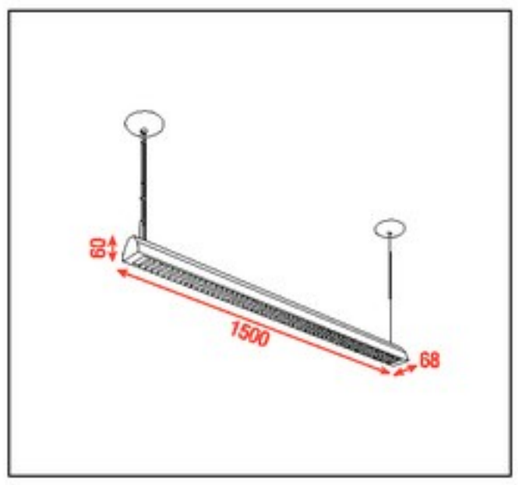





Kansas-135 **A0120135**

1 x T5 35W HE (High Energy) with PMMA lamp shade

- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct down light

Included:

- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies


Kansas-154 **A0120154**


1 x T5 54W HO (High Output) with PMMA lamp shade

- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct down light


Included:

- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies

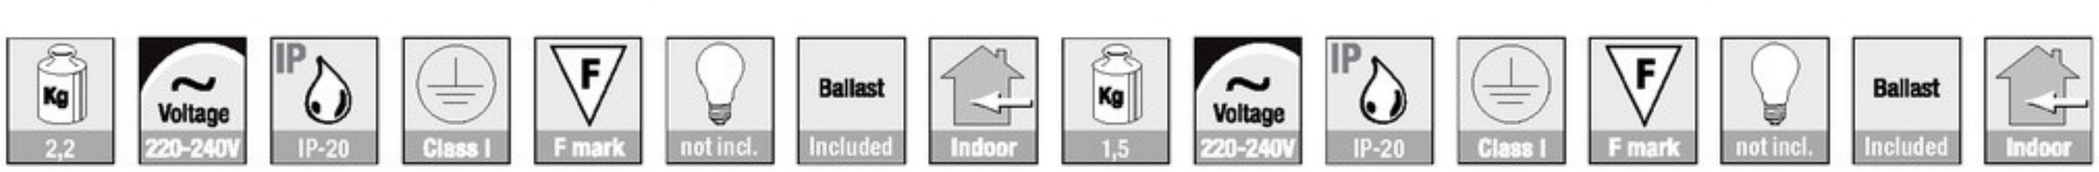

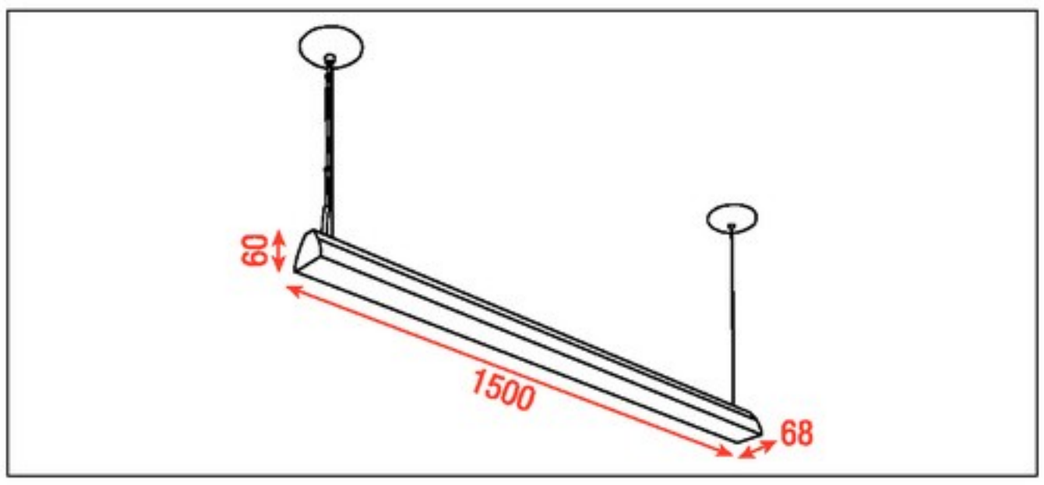



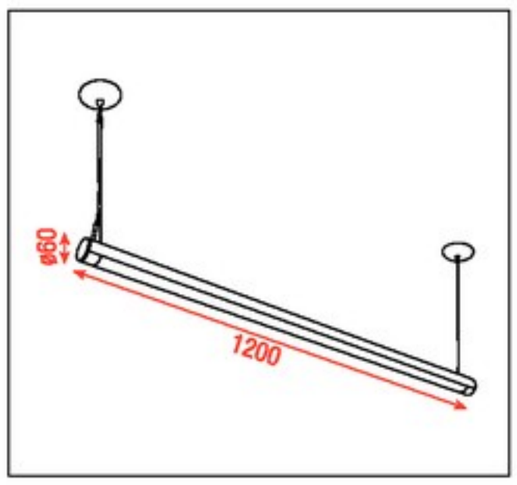

Office-lights



Kansas-135L **A0121135**

1 x T5 35W HE (High Energy) with PMMA lamp shade

- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA Direct down light

Included:
- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies


Kansas-154L **A0121154**


1 x T5 54W HE HO (High Output) with Louvre lamp shade

- Pre-wired cable suspended luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: Louvre Direct down light

Included:
- 2 x 2 m stainless steel cables
- 1 x 2 m power cable
- 2 connection clips
- 2 ceiling canopies



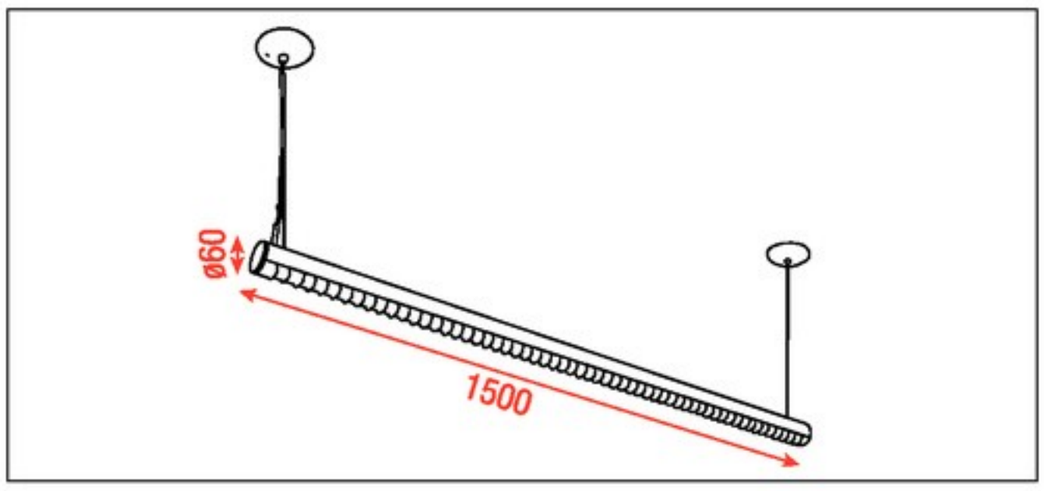

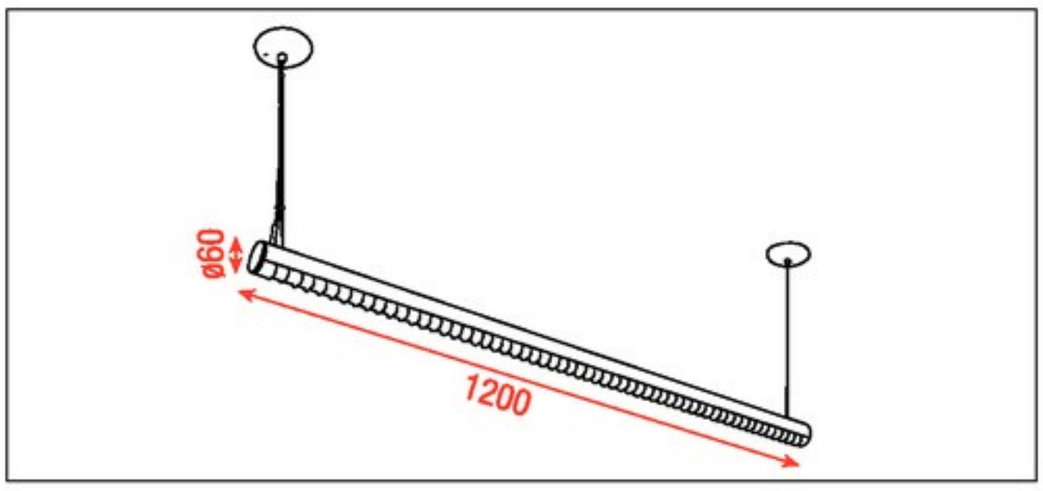




Memphis-128ST **A0420128**

1 x T5 28W HE (High Energy)

- Pre-wired indoor Land luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA
- IP-20

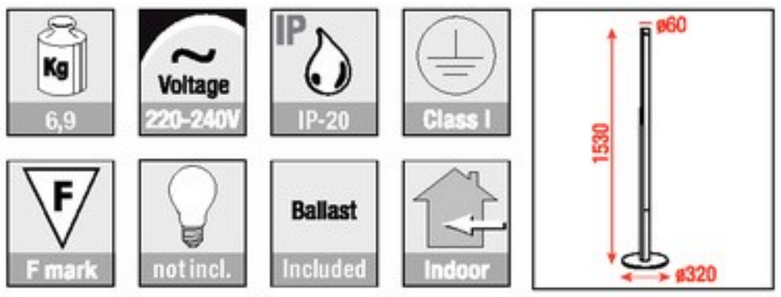




Tucson-135ST **A0421135**

1 x T5 35W HE (High Energy)

- Pre-wired indoor Land luminary
- Included built-in OSRAM ballast
- Frame: Aluminium silver-grey powder paint RAL-9006
- Lamp shade: PMMA
- IP-20

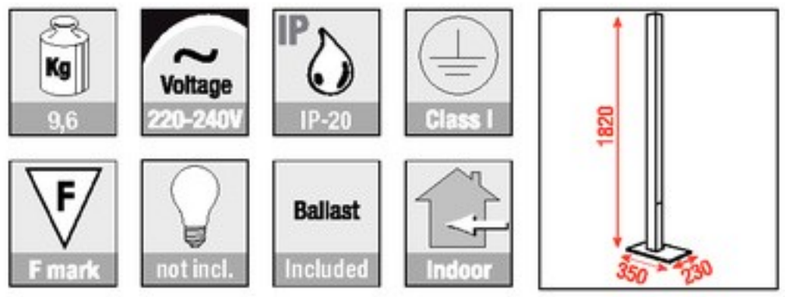

Office-lights








Stockholm-8WW

A0110051

8 x1W warm white LED

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 2x 4x 1 watt warm white LED
- Colour temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 9 Watt
- Dimensions: 120 x 50 x 113 mm



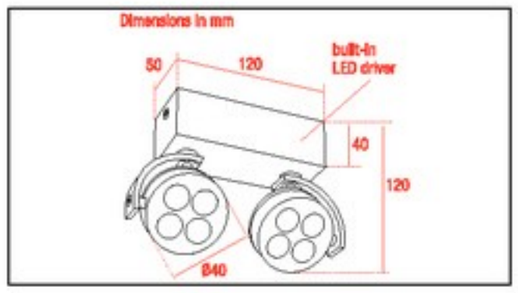



Stockholm-3 WW


A0110050

3 x 1W warm-white LED

- Light direction: direct
- Built-in LED driver
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: ø = 90 / L = 158 mm

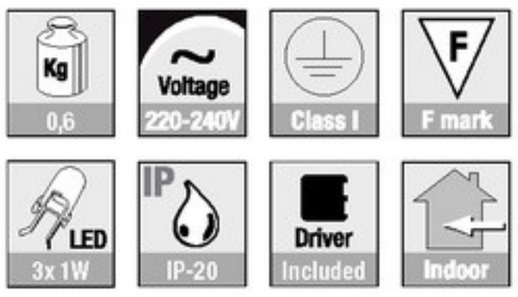

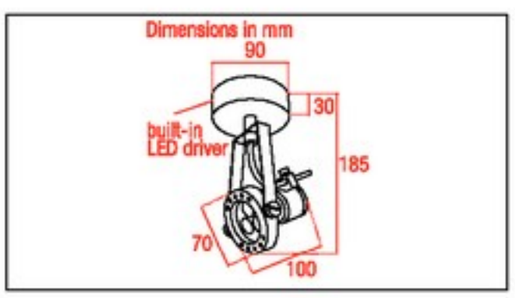

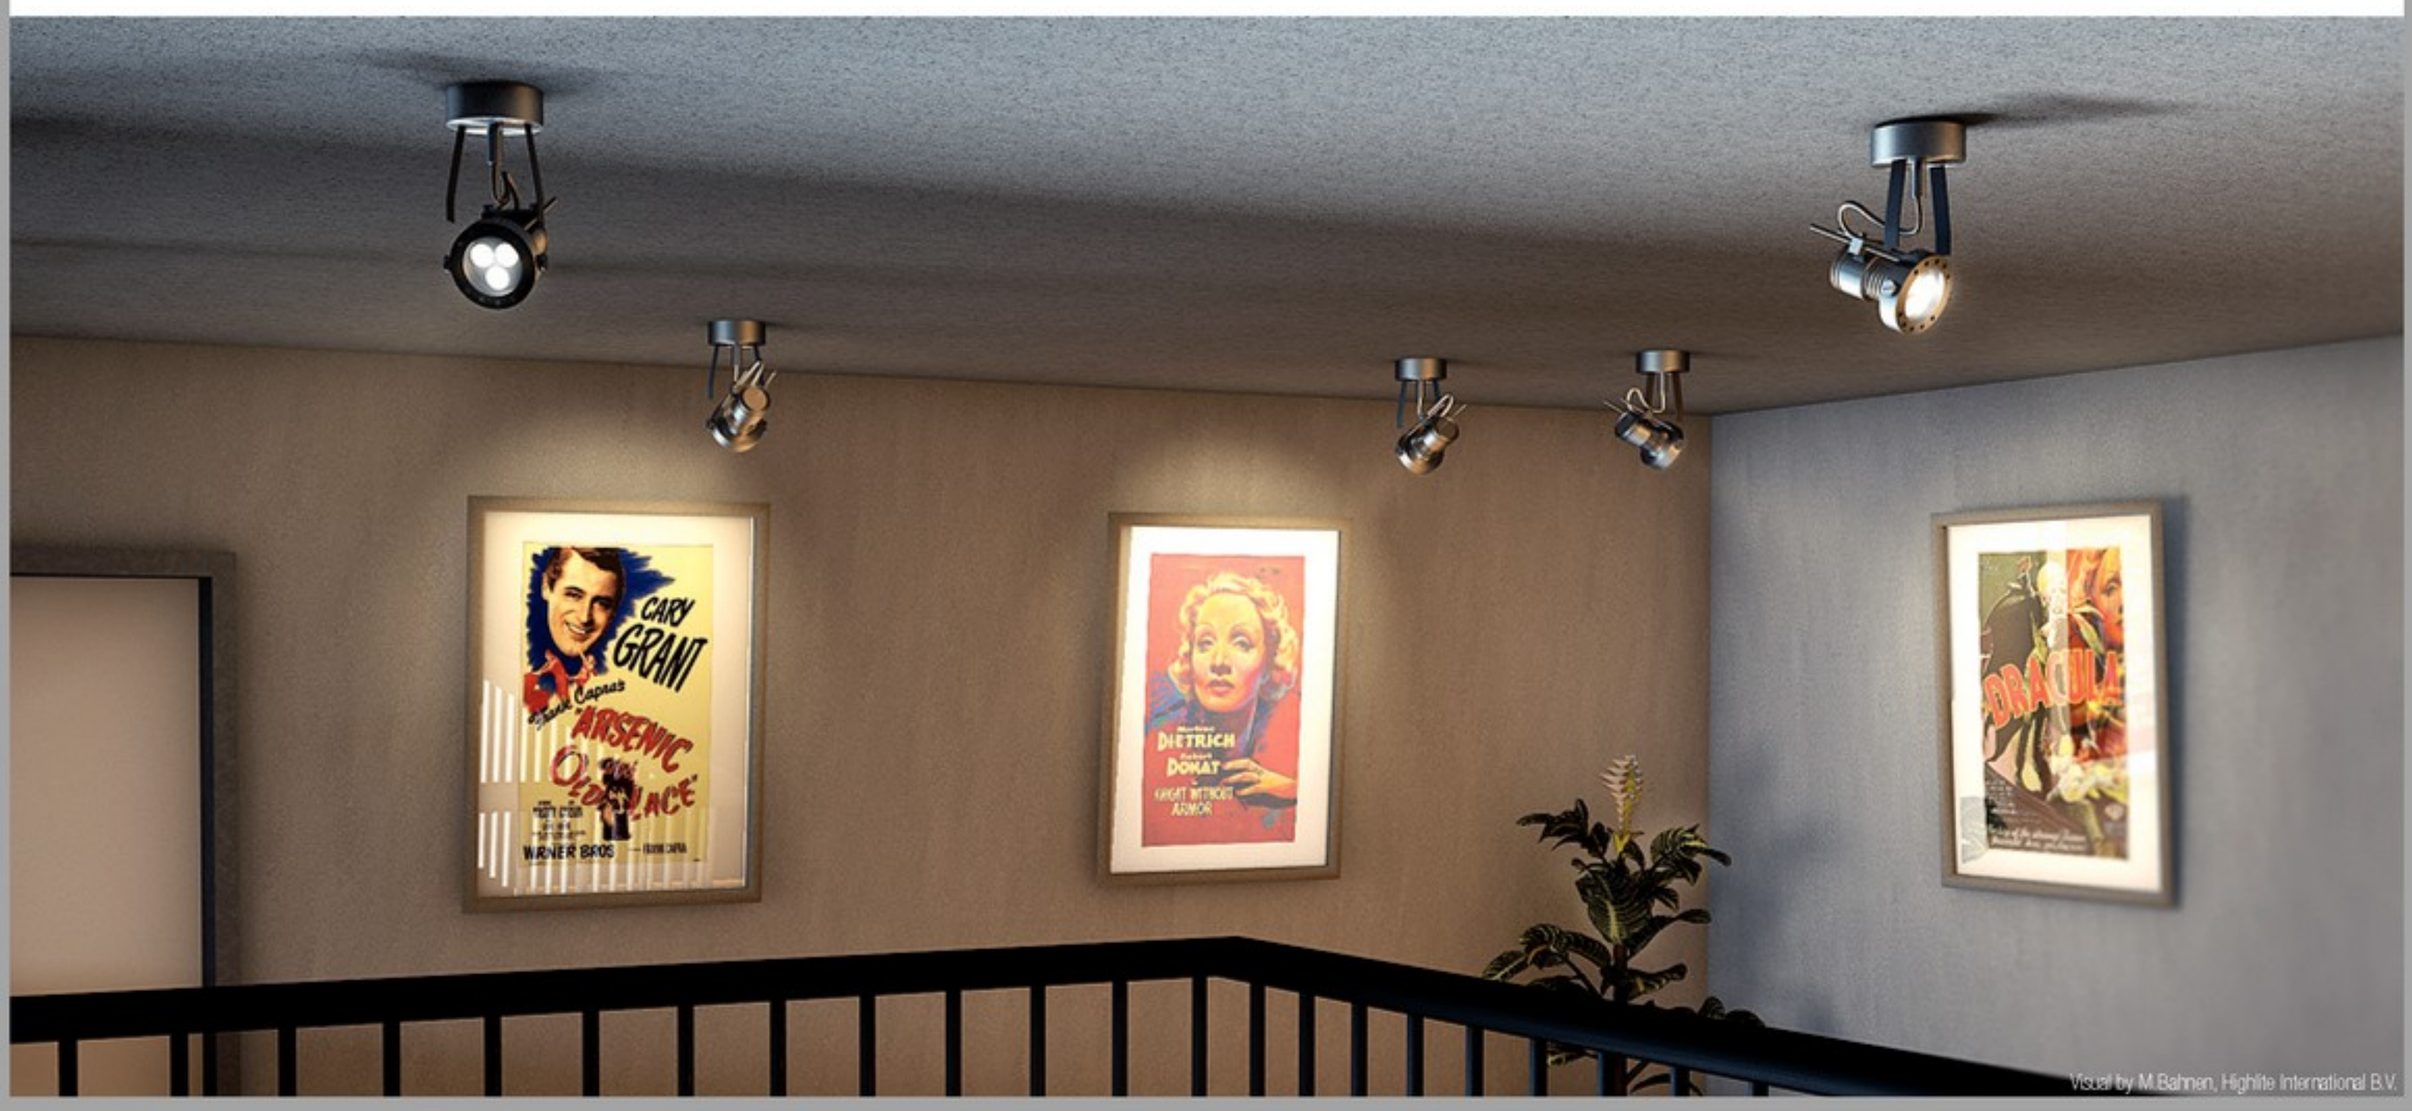


Visual by M.Bahmen, Highlite International B.V.

Down-lights

Copenhagen-2 — A0110022

Max. 2 x 50W Spotlight - MR16

- Housing: Polished aluminium
- With built in transformer

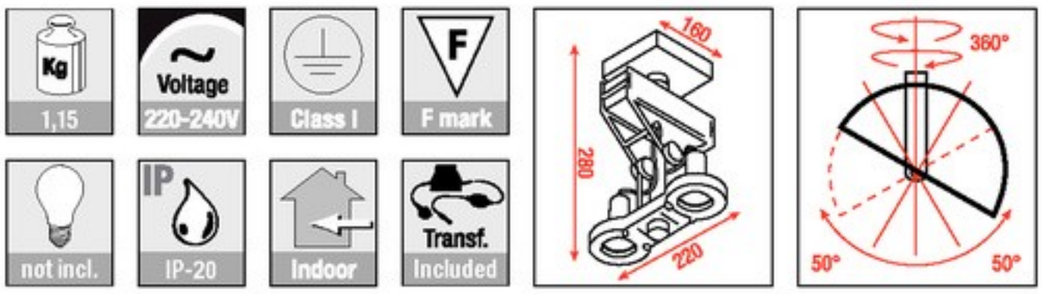




Copenhagen-4 — A0110024

Max. 4 x 50W Spotlight - MR16

- Housing: Polished aluminium
- With built in transformer

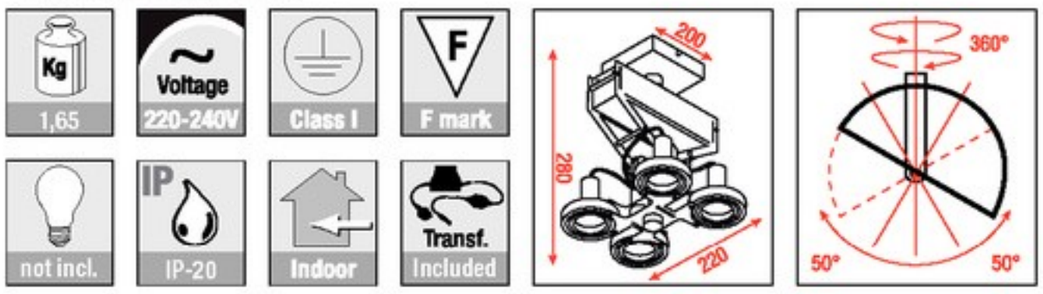




Copenhagen-6 — A0110026


Max. 6 x 50W Spotlight - MR16

- Housing: Polished aluminium
- With built in transformer

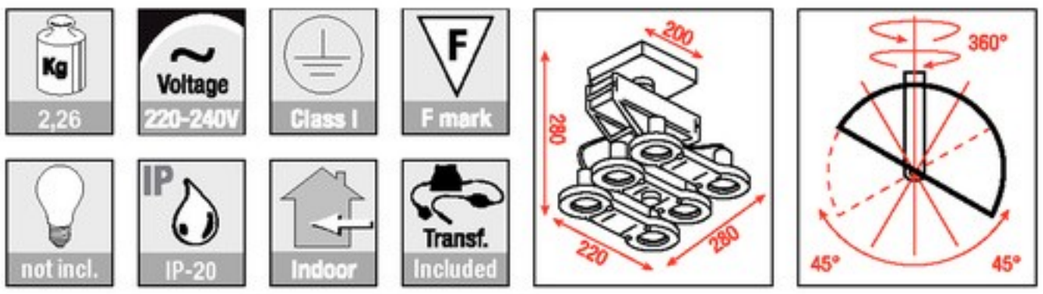



Down-lights

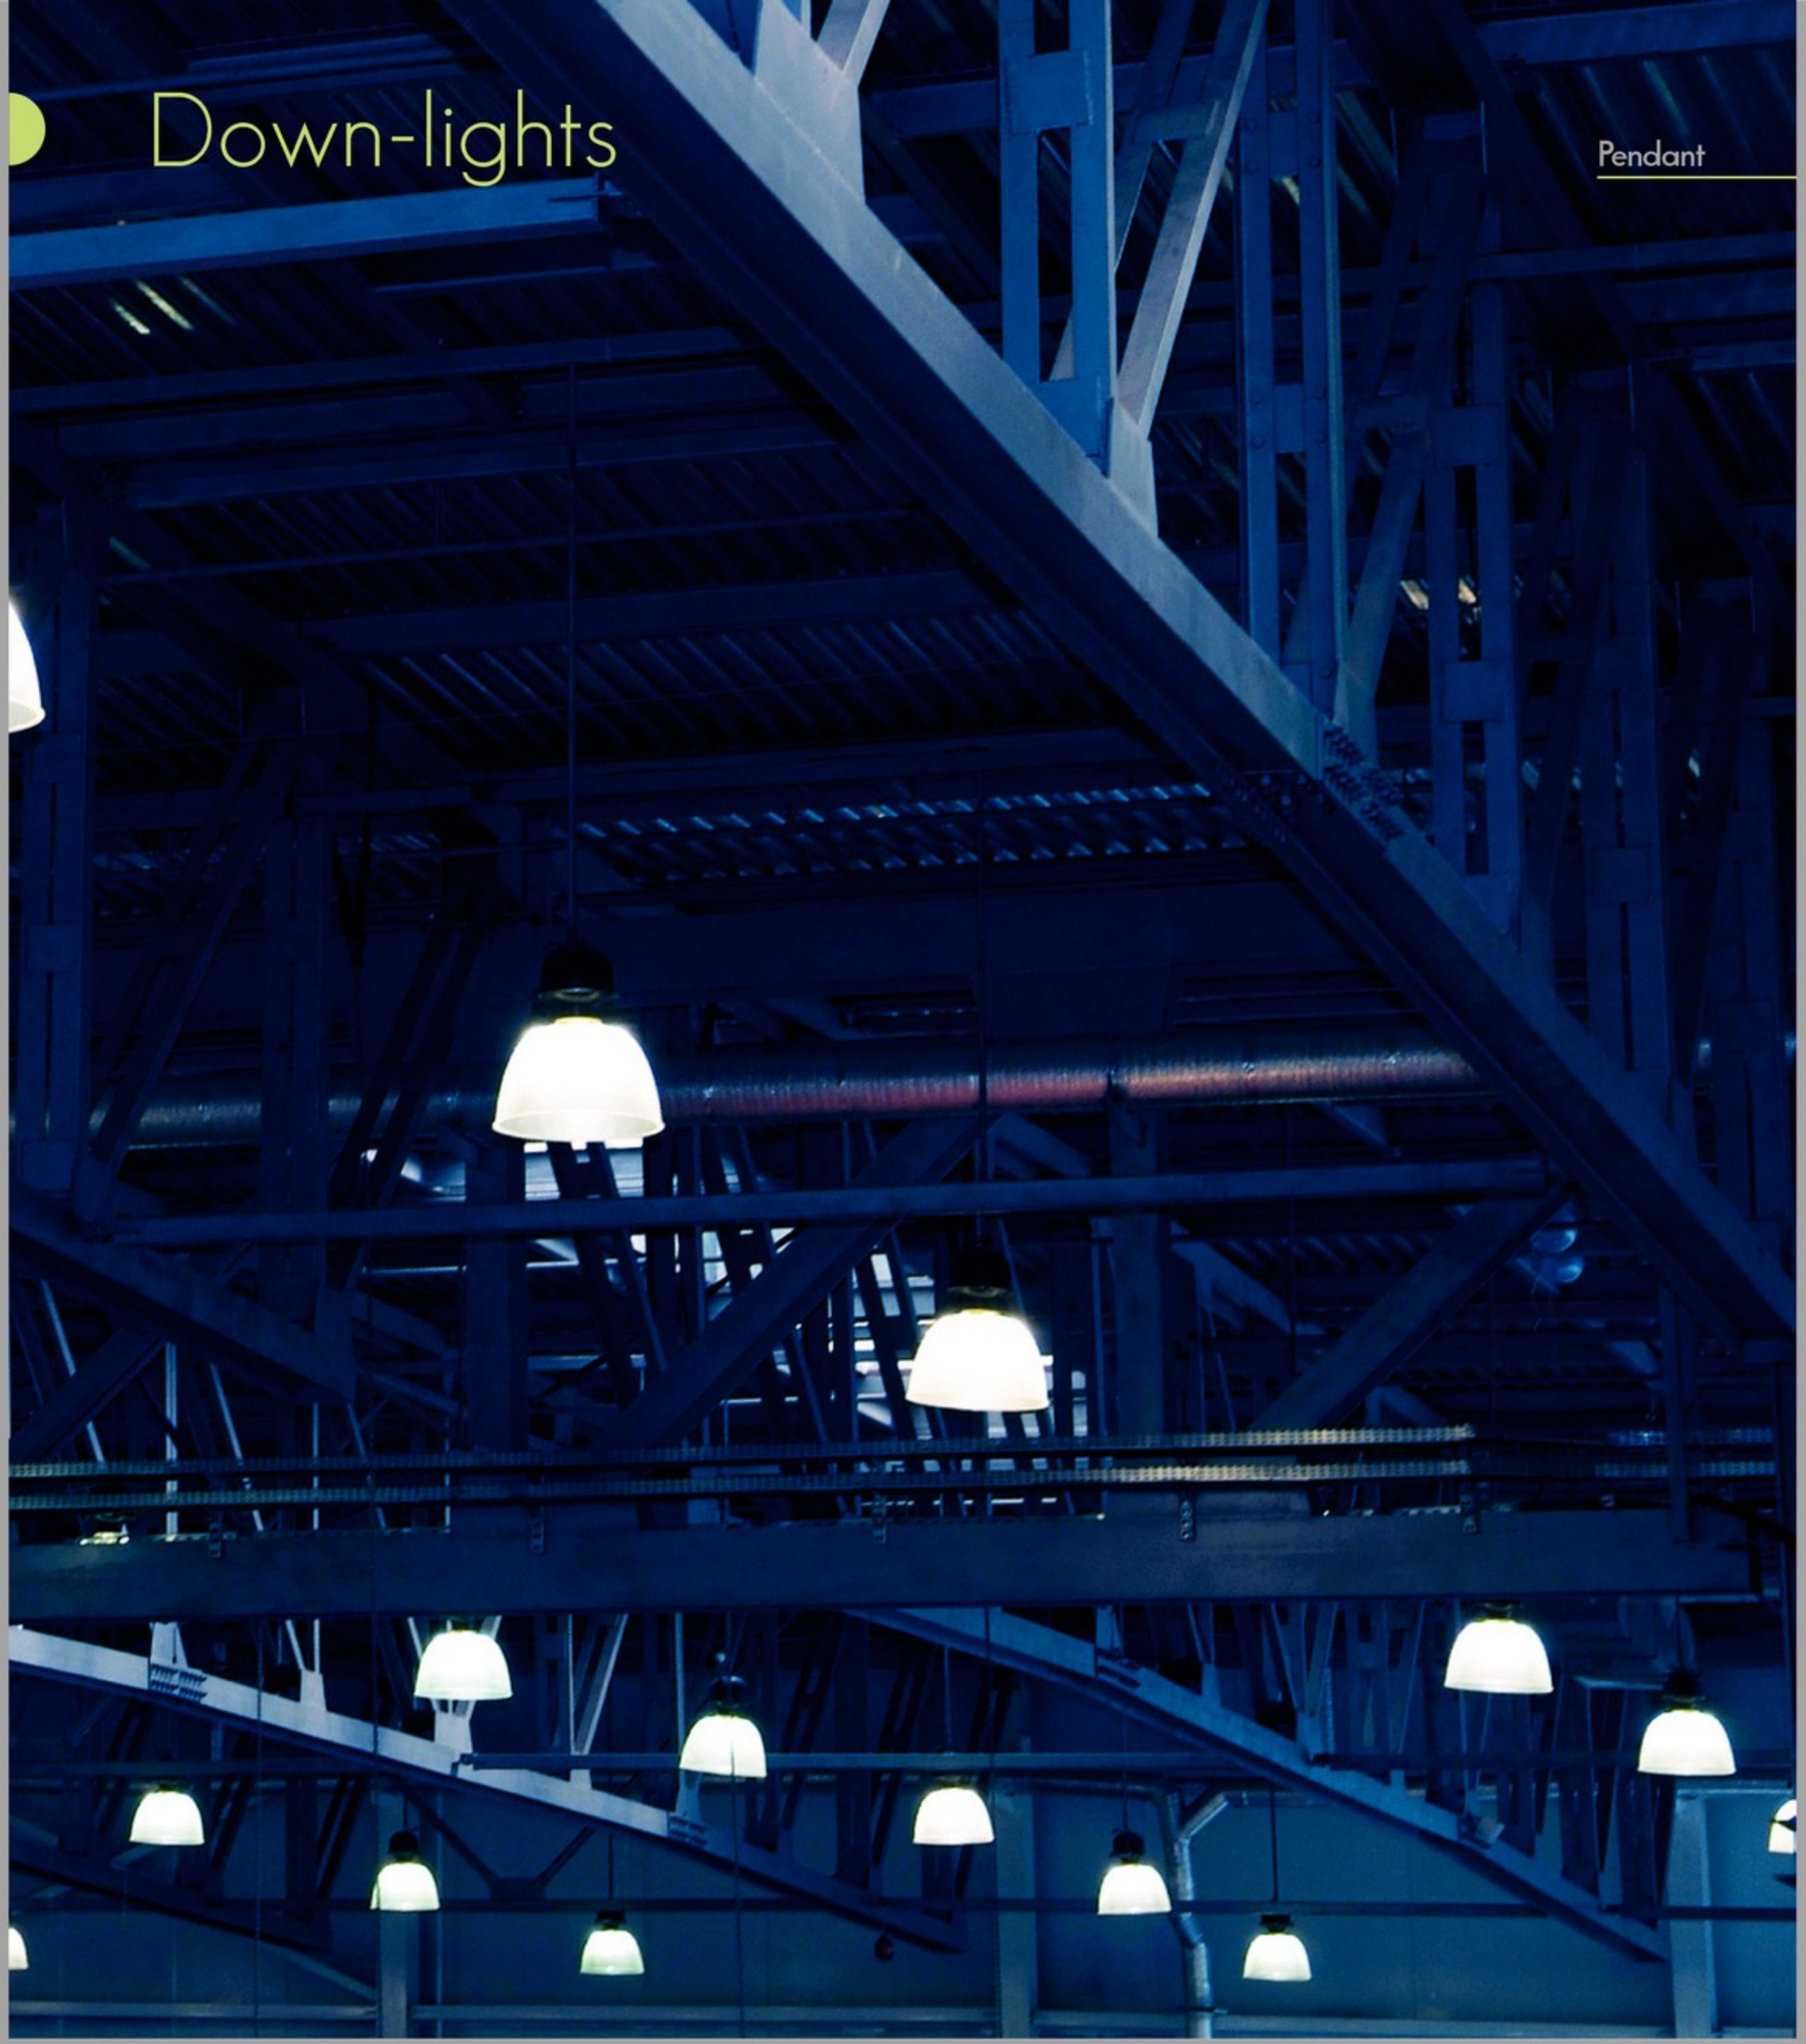


Down-lights


Domburg-TR70

A0122070

1 x HCI-E/P E-27 70W

- Transparent PC reflector
- Included ATCO magnetic ballast
- Input Voltage: 230V AC
- Power consumption: 70W

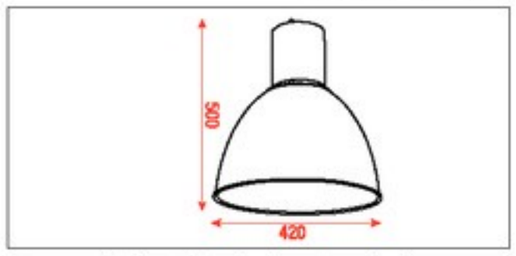

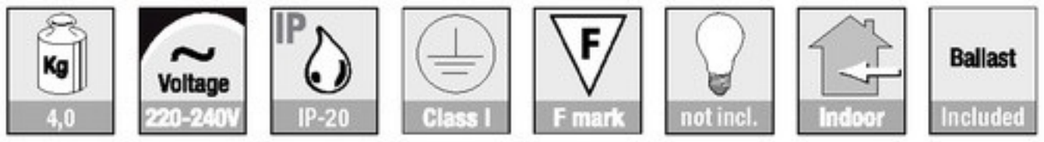



Domburg-TR150

A0122150

1 x HCI-E/P E-27 150W

- Transparent PC reflector
- Included ATCO magnetic ballast
- Input Voltage: 230V AC
- Power consumption: 150W

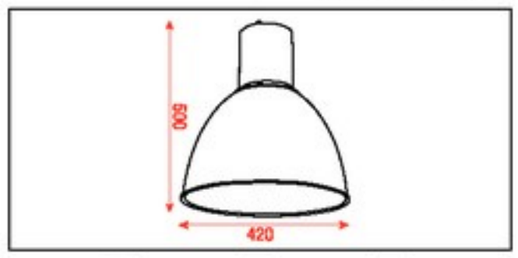

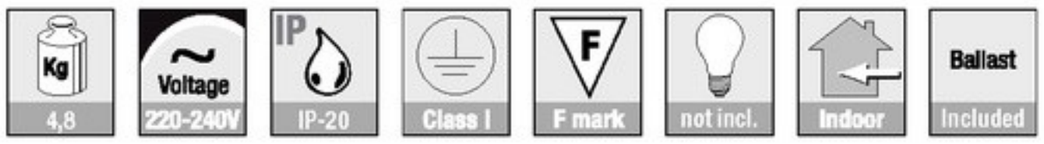





Domburg-TR250

A0122250

1 x HQI-E/P E-40 250W

- Transparent PC reflector
- Included ATCO magnetic ballast
- Input Voltage: 230V AC
- Power consumption: 250W

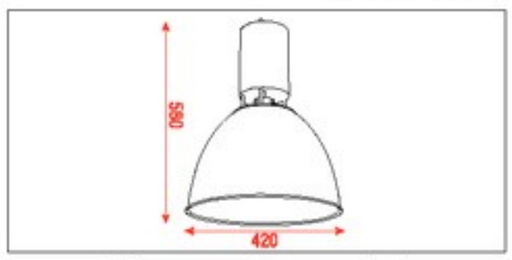

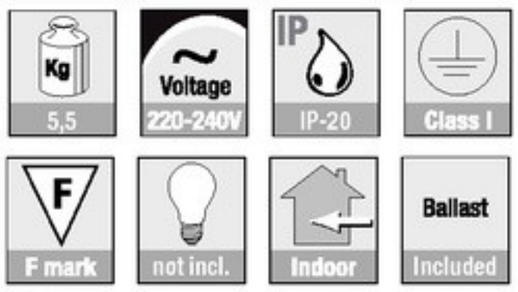





Domburg-TR400

A0122400

1 x HQI-E/P E-40 400W

- Transparent PC reflector
- Included ATCO magnetic ballast
- Input Voltage: 230V AC
- Power consumption: 400W

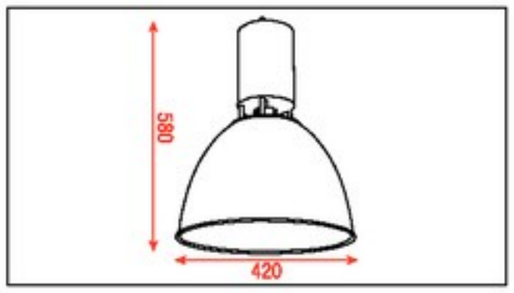

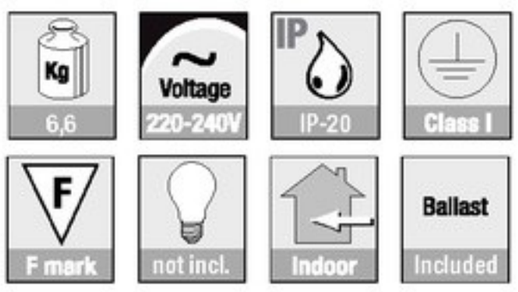




Domburg-AL70 — A0123070

1 x HCI-E/P E-27 70W

- Aluminium reflector: Silver RAL-9006
- Included ATCO magnetic ballast
- Included 4 mm toughened-glass protective cover
- Input Voltage: 230V AC
- Power consumption: 70W




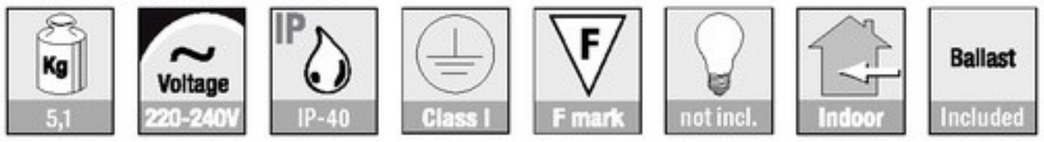

Domburg-AL150 — A0123150

1 x HCI-E/P E-27 150W

- Aluminium reflector: Silver RAL-9006
- Included ATCO magnetic ballast
- Included 4 mm toughened-glass protective cover
- Input Voltage: 230V AC
- Power consumption: 150W

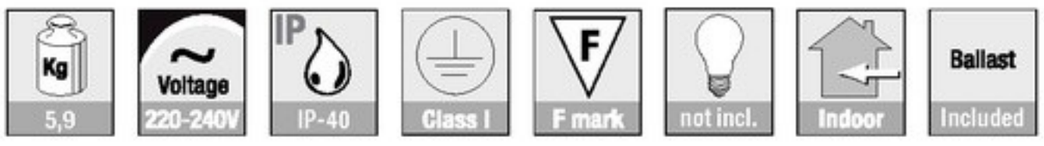




Domburg-AL250 — A0123250

1 x HQI-E/P E-40 250W

- Aluminium reflector: Silver RAL-9006
- Included 4 mm toughened-glass protective cover
- Included ATCO magnetic ballast
- Input Voltage: 230V AC
- Power consumption: 250W




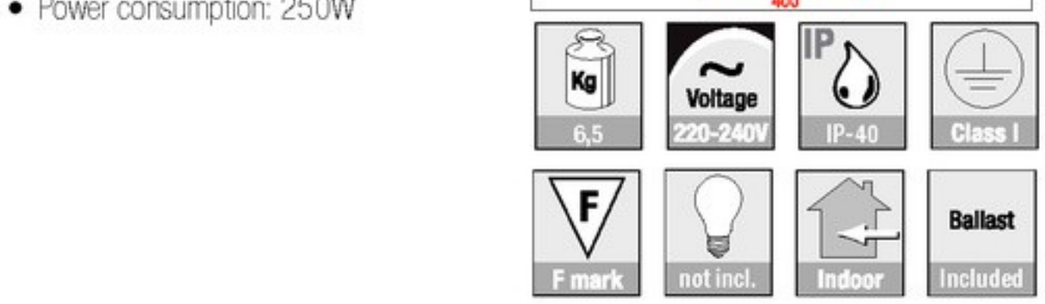


Domburg-AL400 — A0123400

1 x HQI-E/P E-40 400W

- Aluminium reflector: Silver RAL-9006
- Included 4 mm toughened-glass protective cover
- Included ATCO magnetic ballast
- Input Voltage: 230V AC
- Power consumption: 400W

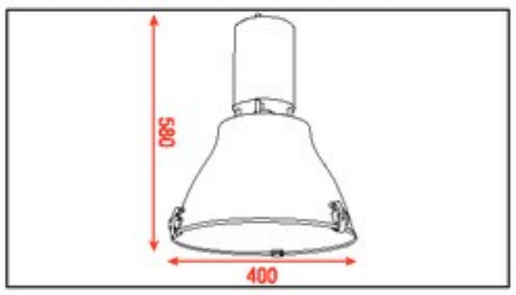

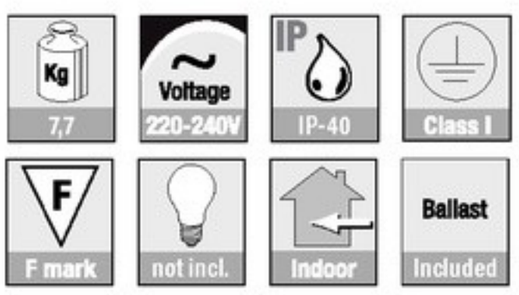

Down-lights






Cordoba-1 WW — A0125001

3W warm-white LED 15°


- Included built-in LED-driver
- Aluminium housing
- Weight: 0,52 kg
- Dimensions: ø30/50 x H110 mm
- Roset: ø80 x 44 mm
- IP classification: IP-20 Class-I
- Power connection: 220-240V AC

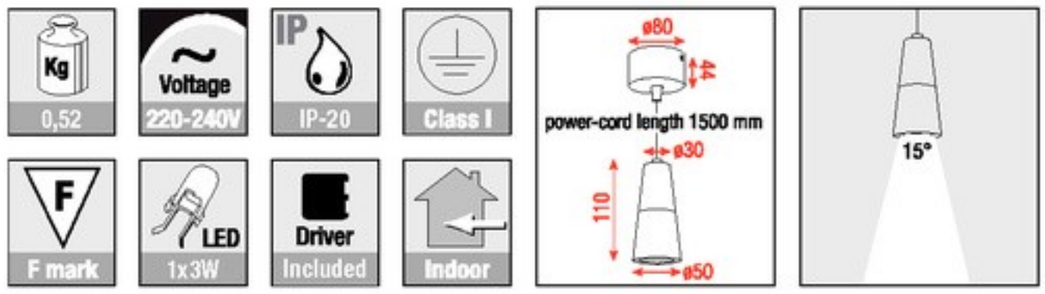

Cordoba-2 WW — A0125002

3W warm-white LED 15°

- Included built-in LED-driver
- Aluminium housing
- Weight: 0,50 kg
- Dimensions: ø35 x H126 mm
- Roset: ø80 x 44 mm
- IP classification: IP-20 Class-I
- Power connection: 220-240V AC

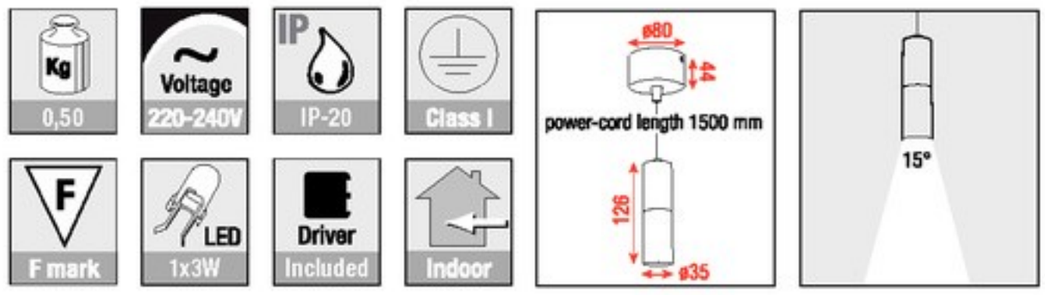


Cordoba-3 — A0125003

1 x 1W warm-white LED

- Light direction: indirect
- Built-in LED driver
- Power consumption: 1,2W
- Housing: Polished Aluminium + Glas
- Dimensions fixture: 40 x 40 x 158 mm
- Dimensions roset: ø80 x 44 mm



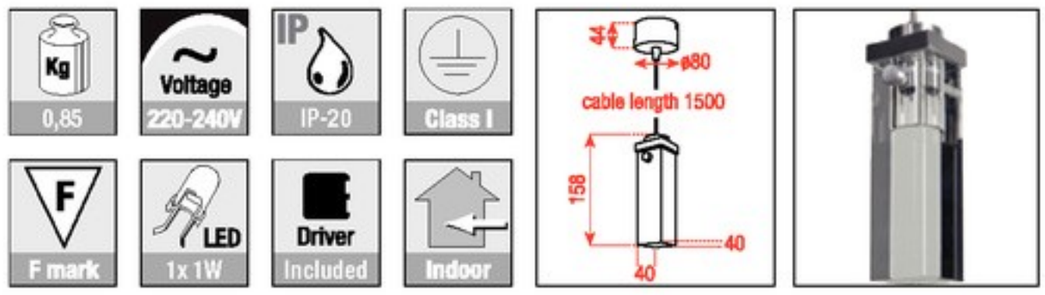

Down-lights



Visual by M.Bahnen, Highlite International B.V.

Iowa-1 WW — A0139801


1x 1W warm-white LED


- Housing: solid Aluminium
- Operating Power: constant current 350mA





Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950010	LED dimmable driver universal Max. 25W

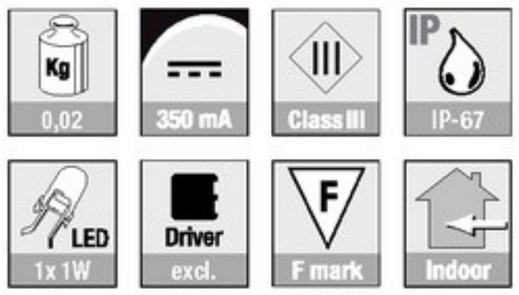

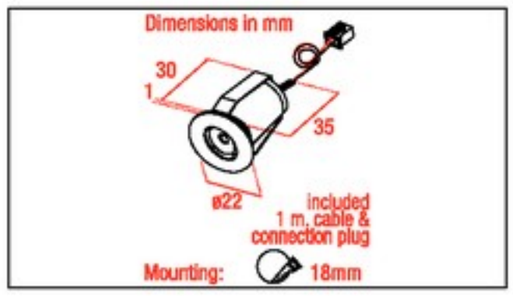

Iowa-10 WW — A0139802


1x 1W warm-white LED


- Housing: solid Aluminium
- Operating Power: constant current 350mA





Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950010	LED dimmable driver universal Max. 25W

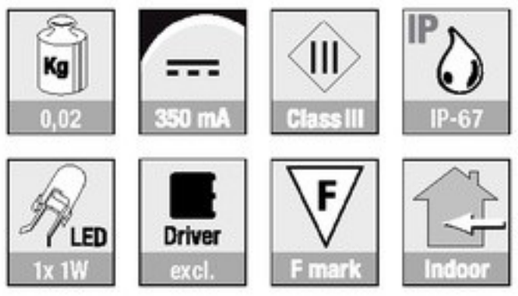

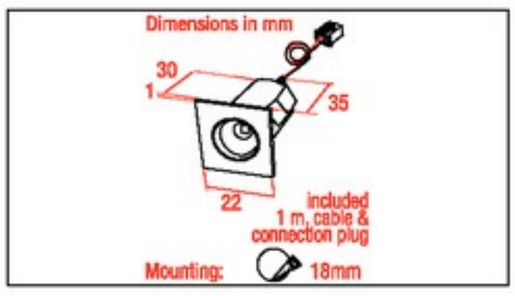

Girona-R WW — A0139804


1x 1W warm-white LED with 360° x 30° adjustable light beam


- Housing: solid Aluminium
- Operating Power: constant current 350mA





Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950010	LED dimmable driver universal Max. 25W

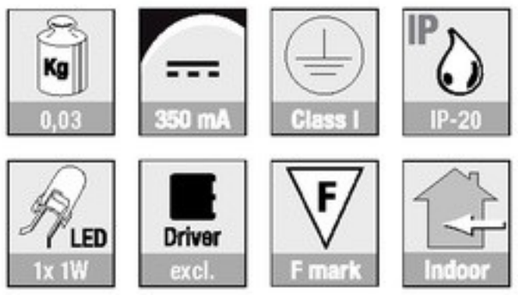

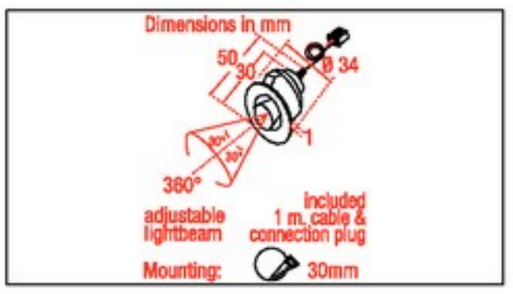


Down-lights

LED TECHNOLOGY

Girona-SQ WW — A0139805


1x 1W warm-white LED with 360° x 30° adjustable light beam

- Housing: solid Aluminium
- Operating Power: constant current 350mA

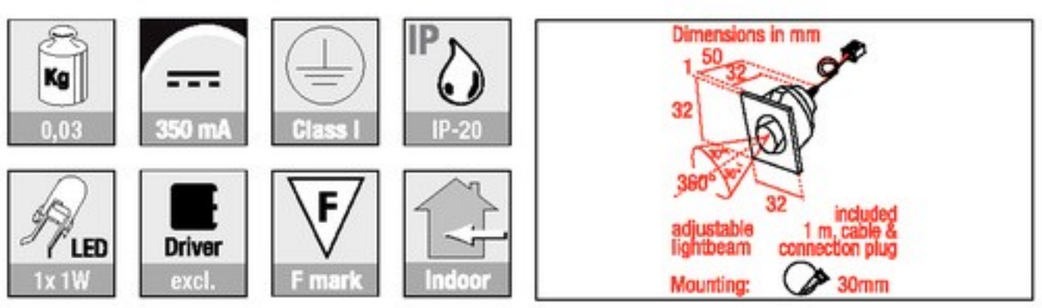






Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950010	LED dimmable driver universal Max. 25W



Toronto-1 WW — A0139001

1W warm-white LED 15°

- Recessed down-light included 1m cable + plug
- Excl. LED driver
- Aluminium housing
- Weight: 0,06 kg
- Dimensions: 56 x 56 x 32 mm
- Mounting: ø48 mm
- IP classification: IP-20 Class III
- Power connection: LED constant current driver 350mA

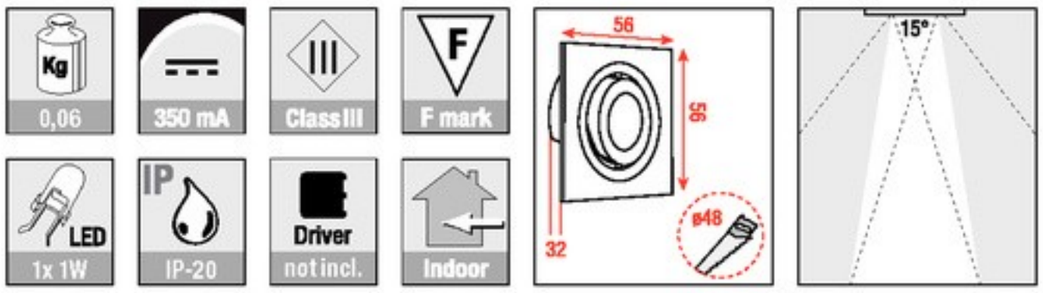


Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950004	LED constant current driver 350mA/1-18W
	A9950010	LED dimmable driver universal Max. 25W



Toronto-2 WW — A0139002

2 x 1W warm-white LED 15°

- Recessed down-light included 1m cable + plug
- Excl. LED driver
- Aluminium housing
- Weight: 0,12 kg
- Dimensions: 112 x 57 x 32 mm
- Mounting: 39 x 112 mm
- IP classification: IP-20 Class III
- Power connection: LED constant current driver 350mA

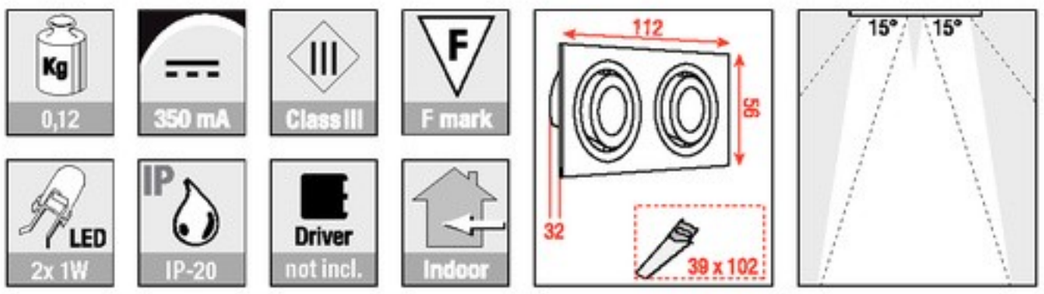


Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950004	LED constant current driver 350mA/1-18W
	A9950010	LED dimmable driver universal Max. 25W



Toronto-3 WW — A0139003

3 x 1W warm-white LED 15°

- Recessed down-light 1m cable + plug included
- Excl. LED driver
- Aluminium housing
- Weight: 0,18 kg
- Dimensions: 168 x 56 x 32 mm
- Mounting: 39 x 168 mm
- IP classification: IP-20 Class III
- Power connection: LED constant current driver 350mA

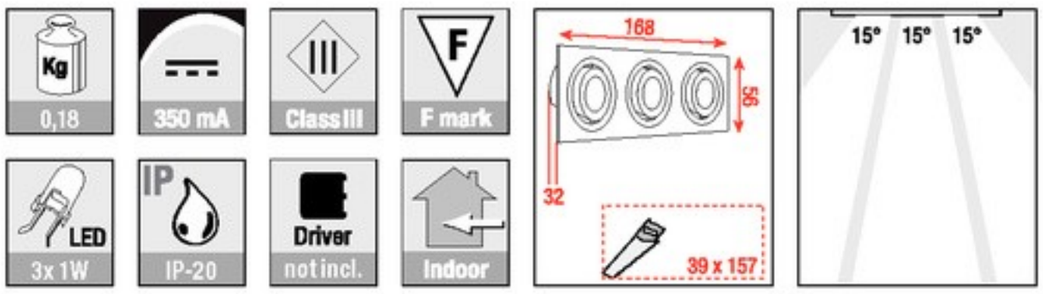

Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950004	LED constant current driver 350mA/1-18W
	A9950010	LED dimmable driver universal Max. 25W

Down-lights



LED TECHNOLOGY


Toronto-4 WW

A0139004

4 x 1W warm-white LED 15°

- Recessed down-light 1m cable + plug included
- Excl. LED driver
- Aluminium housing
- Weight: 0,26 kg
- Dimensions: 224 x 56 x 32 mm
- Mounting: 39 x 216 mm
- IP classification: IP-20 Class III
- Power connection: LED constant current driver 350mA



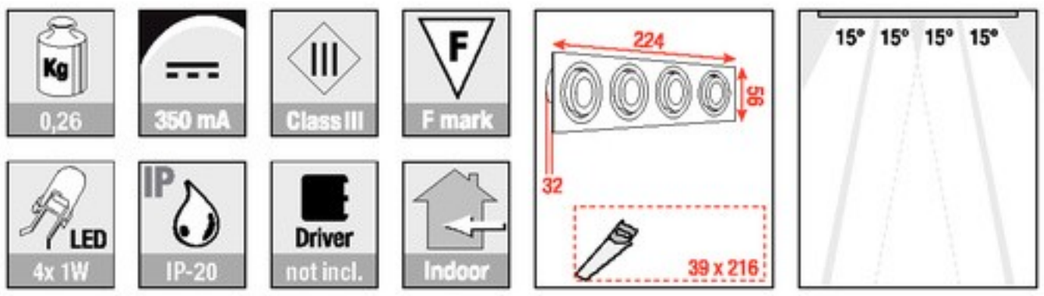


Driver		
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950004	LED constant current driver 350mA/1-18W
	A9950010	LED dimmable driver universal Max. 25W



Halifax-40 WW — A0139940

1W LED warm-white LED 15°

- Recessed down-light 1m cable + plug included
- Excl. LED driver
- Aluminium housing
- Weight: 0,03 kg
- Dimensions: ø40 x D25 mm
- Mounting: ø33 mm
- IP classification: IP-20 Indoor use Class III
- Power connection: LED constant current driver 350mA

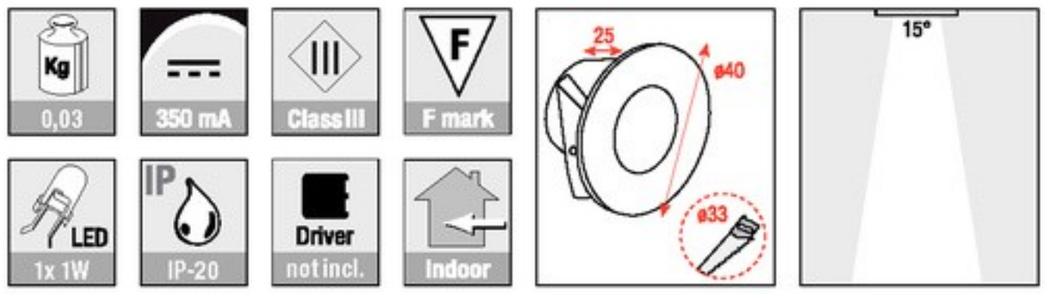


Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950004	LED constant current driver 350mA/1-18W
	A9950010	LED dimmable driver universal Max. 25W



Halifax-46 WW — A0139946

1W LED warm-white LED 15°

- Recessed down-light 1m cable + plug included
- Excl. LED driver
- Aluminium housing
- Weight: 0,05 kg
- Dimensions: ø46 x D32 mm
- Mounting: ø39 mm
- IP classification: IP-44 Indoor use Class III
- Power connection: LED constant current driver 350mA

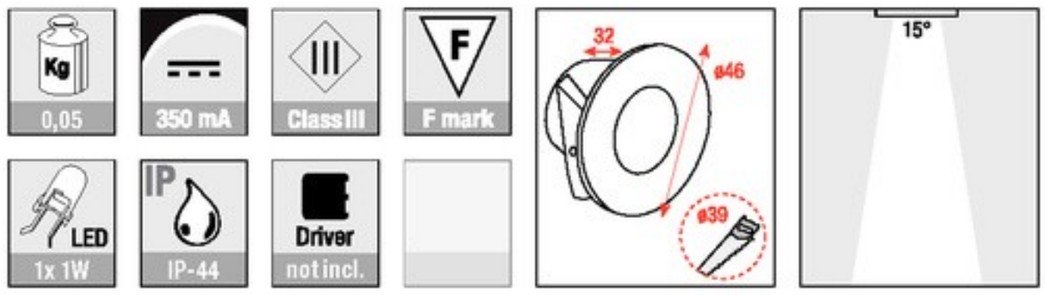

Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950004	LED constant current driver 350mA/1-18W
	A9950010	LED dimmable driver universal Max. 25W


Down-lights

Montreal-46 WW

A0139846

1W warm-white LED 15°

- Recessed down-light 1m cable + plug included
- Excl. LED driver
- Aluminium housing
- Weight: 0,05 kg
- Dimensions: ø46 x D26 mm
- Mounting: ø38 mm
- IP classification: IP-20 Indoor Class III
- Power connection: LED constant current driver 350mA

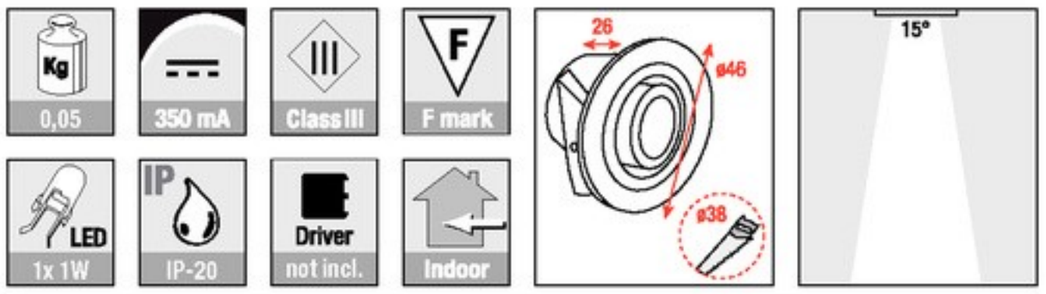

Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950004	LED constant current driver 350mA/1-18W
	A9950010	LED dimmable driver universal Max. 25W




Montreal-56 WW

A0139856

1W warm-white LED 15°

- Recessed down-light 1m cable + plug included
- Excl. LED driver
- Aluminium housing
- Weight: 0,06 kg
- Dimensions: ø56 x D29 mm
- Mounting: ø48 mm
- IP classification: IP-20 Indoor Class III
- Power connection: LED constant current driver 350mA

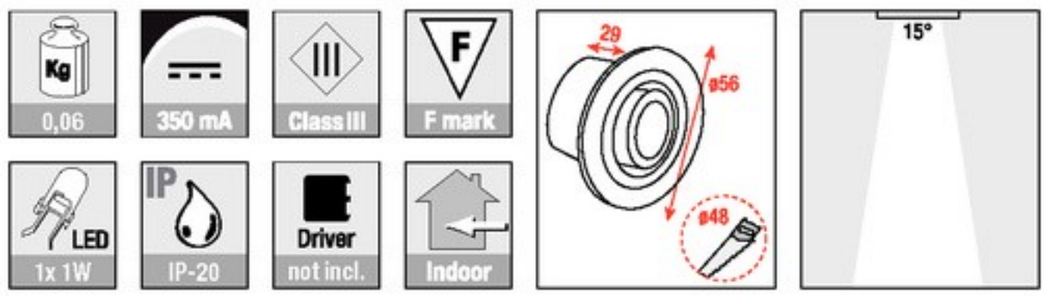

Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950004	LED constant current driver 350mA/1-18W
	A9950010	LED dimmable driver universal Max. 25W

Down-lights





Denver-S

Max. 35W Downlight - MR11

A0130101
LED COMPATIBLE

- Housing: Polished aluminium



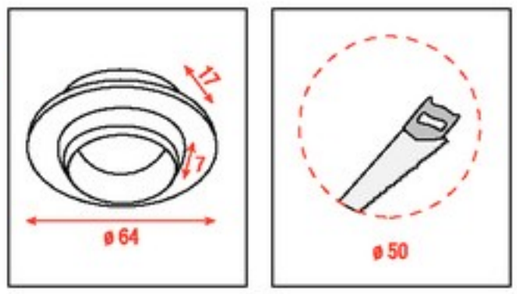





Denver-M

Max. 1 x 50W Downlight - MR16

A0130102
LED COMPATIBLE

- Low voltage supply
- Housing: Polished aluminium
- Incl. 2 lampholders (GU.10 + GU5.3)

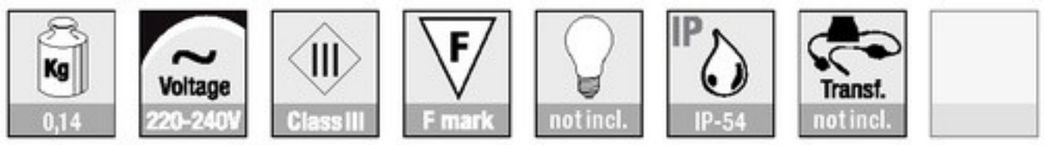

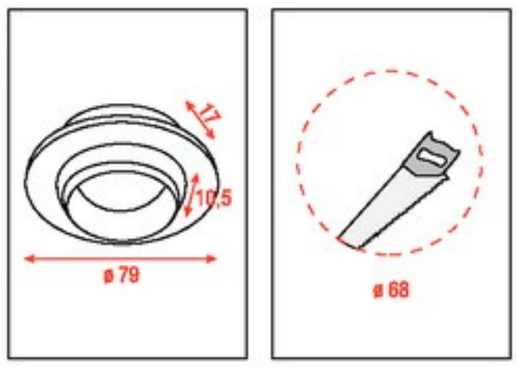




Seattle-S

Max. 35W Downlight - MR11

A0130201
LED COMPATIBLE

- Housing: Polished aluminium



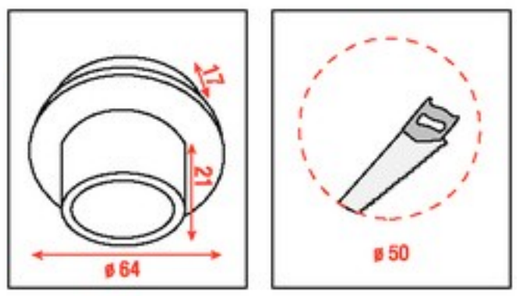





Seattle-M

Max. 1 x 50W 230V Downlight - MR16

A0130202
LED COMPATIBLE

- 1 x 50W
- Housing: Polished aluminium
- Incl. 2 lampholders (GU.10 + GU5.3)



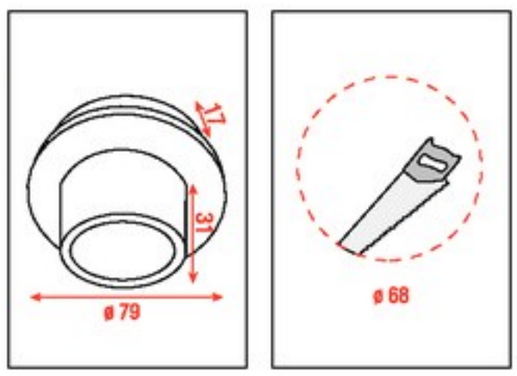

Recessed


Nebraska-S

A0130404

Max. 35W Downlight - MR11

- Housing: Polished Aluminium



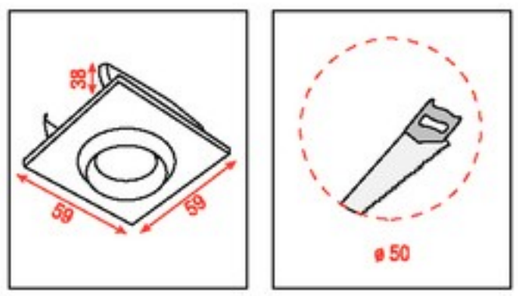




Nebraska-M

A0130405

Max. Downlight - MR16

- Housing: Polished Aluminium



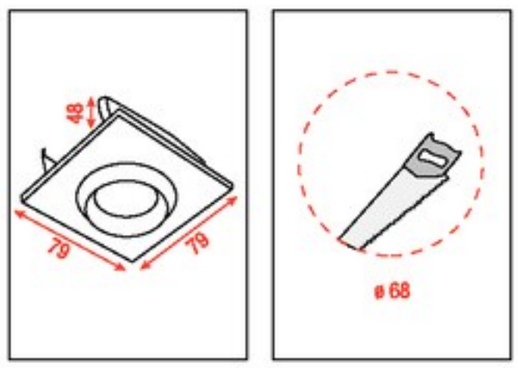




Vancouver-S

A0130301

Max. 35W, downlight MR11

- Housing: Polished aluminium



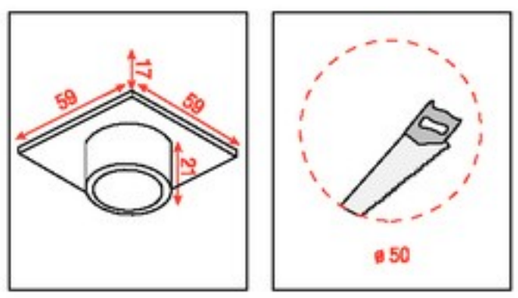




Vancouver-M

A0130302

Max. 50W, downlight MR16

- Housing: Polished aluminium
- Incl. 2 lampholders (GU.10 + GU5.3)



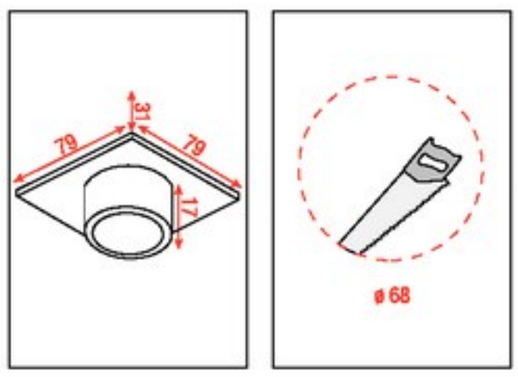






Liverpool-1

A0130501
LED COMPATIBLE

Max. 35W MR11

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

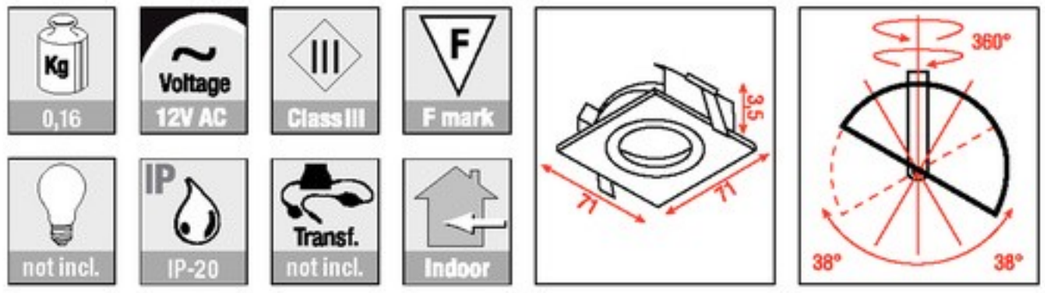




Liverpool-2

A0130502
LED COMPATIBLE

Max. 2 x 35W MR11

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

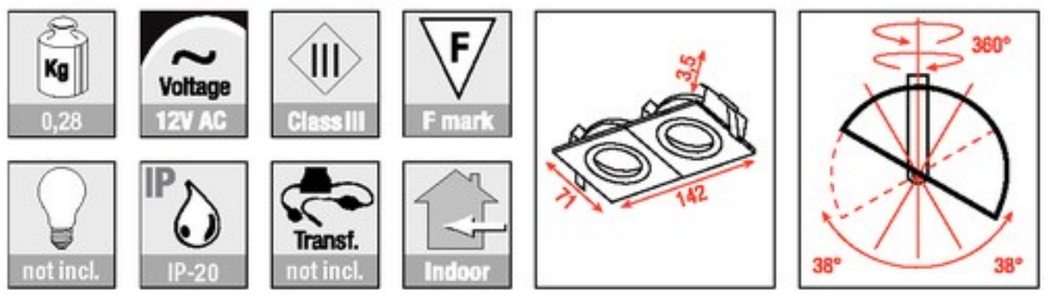



Down-lights


Liverpool-3

A0130503

LED COMPATIBLE

Max. 3 x 35W MR11

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

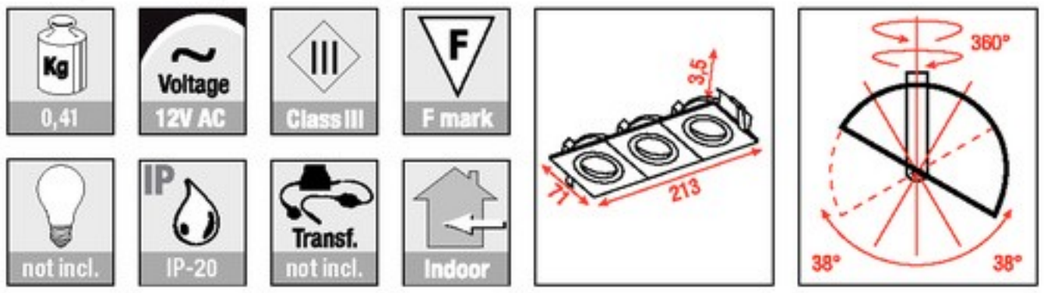




Liverpool-4

A0130504

LED COMPATIBLE

Max. 4 x 35W MR11

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

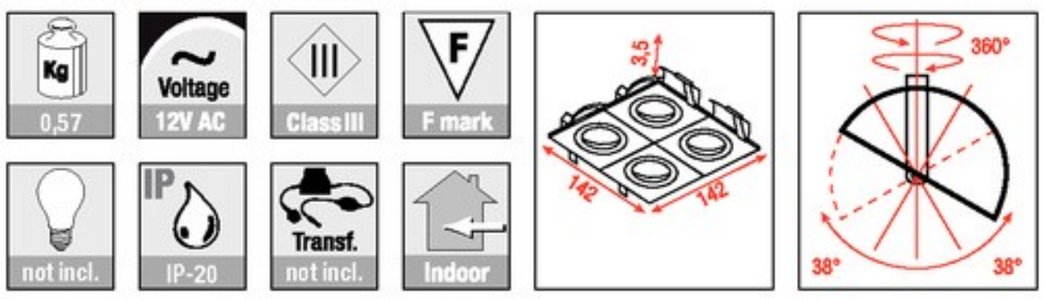




Liverpool-6

A0130506

LED COMPATIBLE

Max. 6 x 35W MR11

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

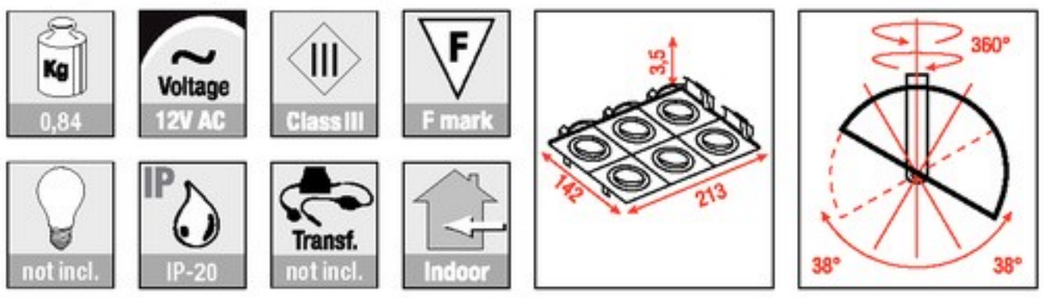



Down-lights




Manchester-1

Max. 50W MR16

A0130601

LED COMPATIBLE

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

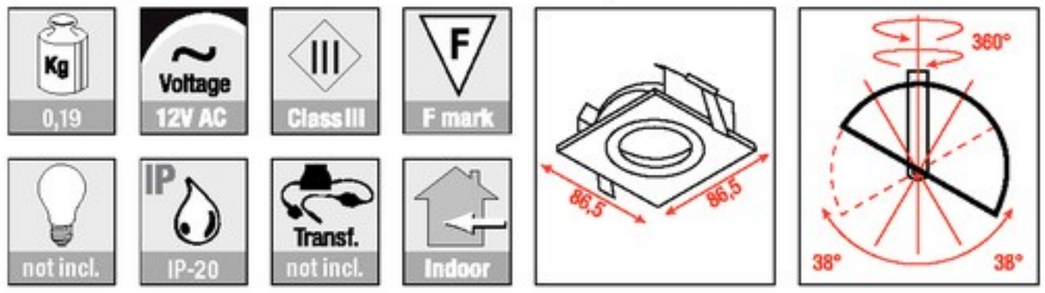




Manchester-2

Max. 2 x 50W MR16

A0130602

LED COMPATIBLE

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

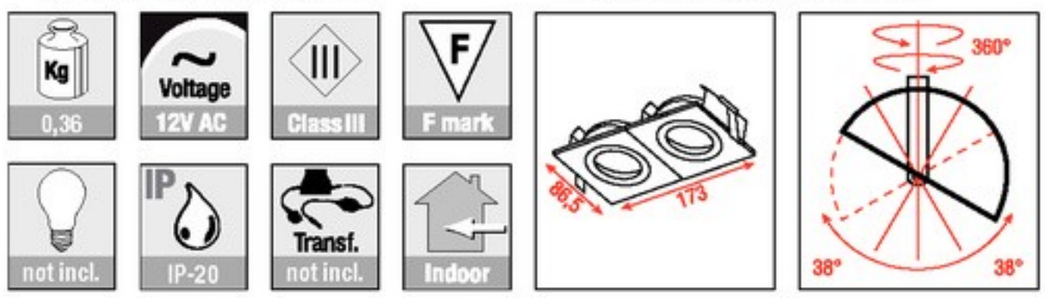




Manchester-3

Max. 3 x 50W MR16

A0130603

LED COMPATIBLE

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

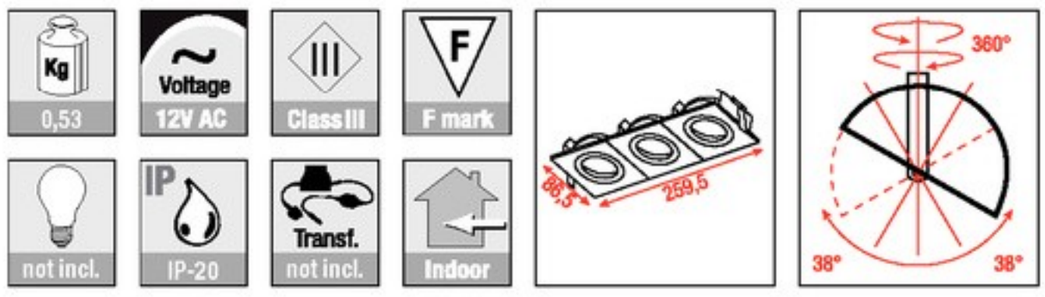




Manchester-4

Max. 4 x 50W MR16

A0130604

LED COMPATIBLE

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

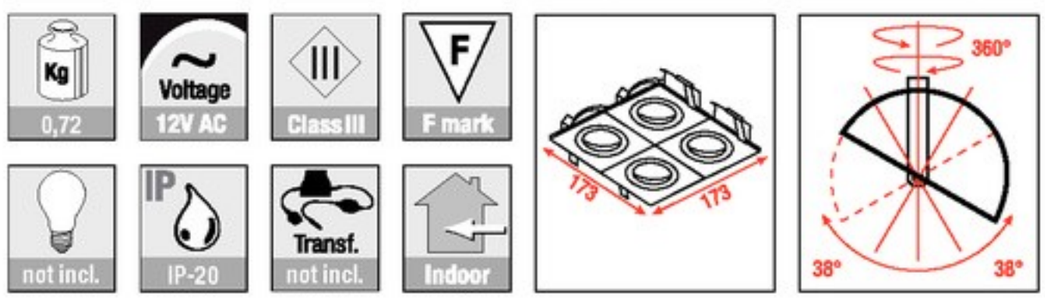




Manchester-6

Max. 6 x 50W MR16

A0130606

LED COMPATIBLE

- Housing: Polished aluminium
- Easy bulb change: Pullout ring

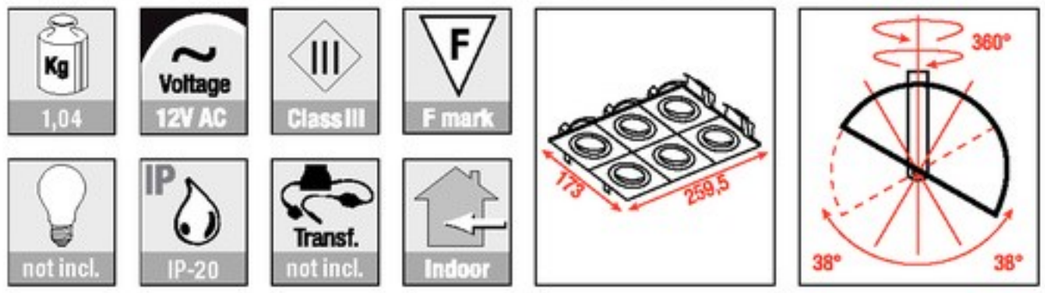

Down-lights



Down-lights



Ontario-S


A0130401

LED COMPATIBLE

Max. 35W, downlight MR11

- Housing: Polished aluminium



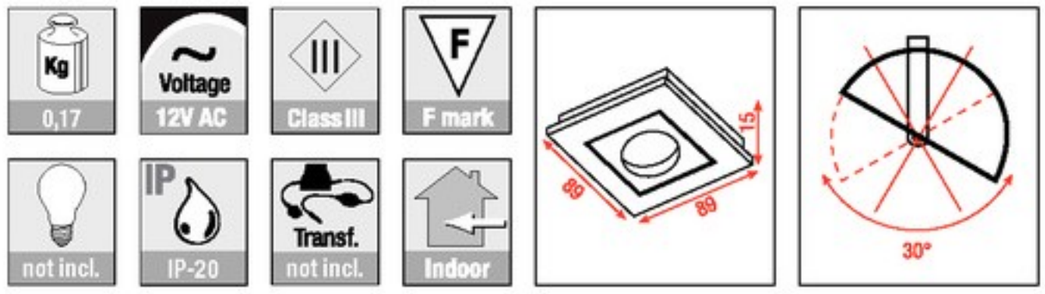



Ontario-M


A0130402

LED COMPATIBLE

Max. 50W, downlight MR16

- Housing: Polished aluminium
- Incl. 2 lampholders (GU.10 + GU5.3)



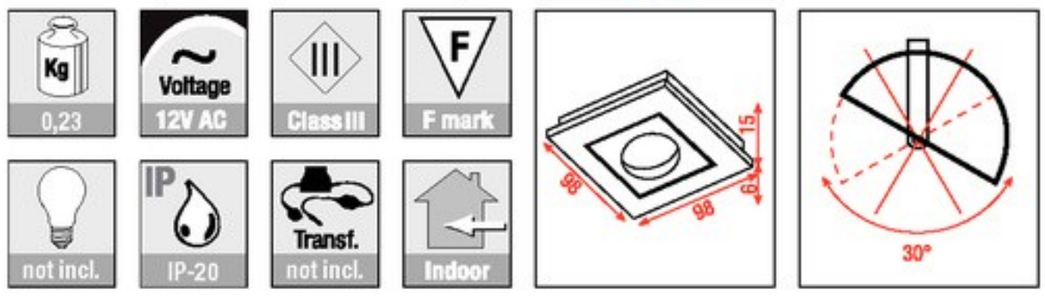




Almeria-R

A0130950

LED COMPATIBLE

Max. 50W, Halospot 111 IRC (QR111)

- Housing: Solid Aluminium
- Dimensions fixture: ø173 x 36 mm
- Adjustable lamp in all directions
- Excluded transformer
- Advised Transformer: ARTECTA A9900070 AET-20-70

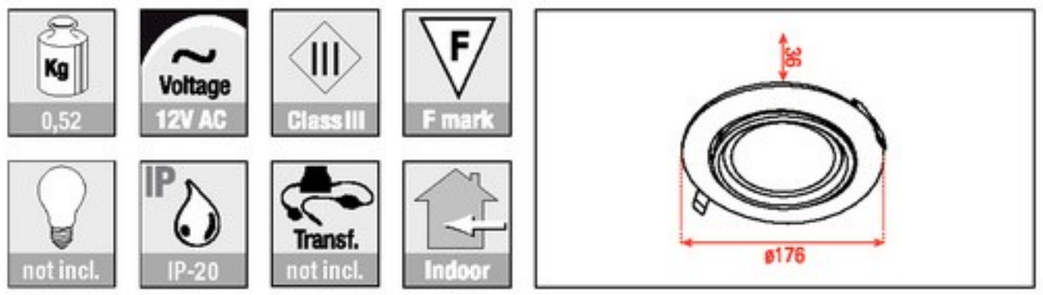




Almeria-SQ

A0130951

LED COMPATIBLE

Max. 50W, Halospot 111 IRC (QR111)


- Housing: Solid Aluminium
- Dimensions fixture: 158,5 x 158,5 mm
- Adjustable lamp in all directions
- Excluded transformer
- Advised Transformer: ARTECTA A9900070 AET-20-70

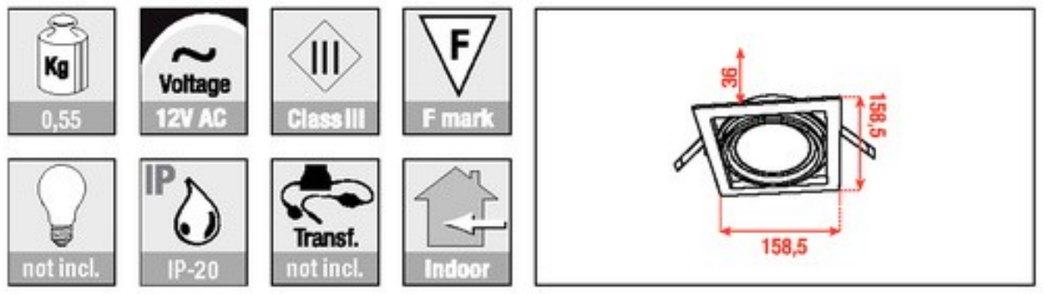

Down-lights

Jakarta-3 WW
A0139803

3 x 1W warm-white LED 15°

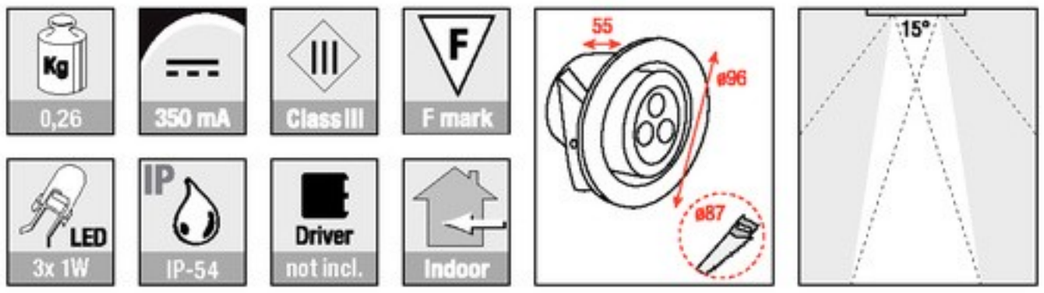


- Recessed down-light included 1m cable + plug
- Excl. LED driver
- Aluminium housing
- Weight: 0,26 kg
- Dimensions: ø98 x 50 mm
- Mounting: ø87 mm
- IP classification: IP-54
- Power connection: LED constant current driver 350mA



Jakarta-6 WW
A0139806

6 x 1W warm-white LED 15°

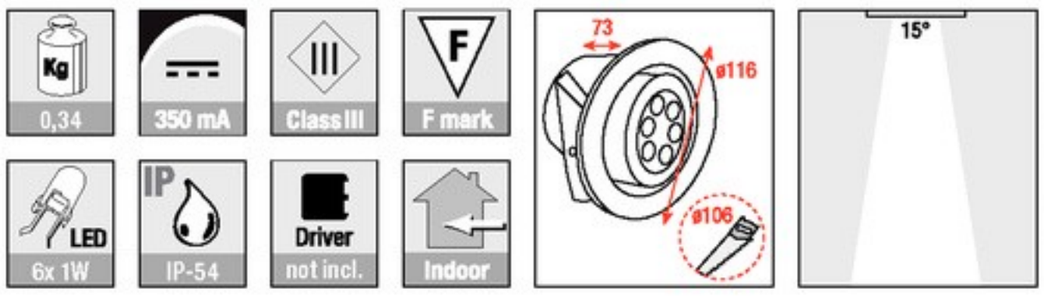


- Recessed down-light included 1m cable + plug
- Excl. LED driver
- Aluminium housing
- Weight: 0,34 kg
- Dimensions: ø115 x 73 mm
- Mounting: ø105 mm
- IP classification: IP-54
- Power connection: LED constant current driver 350mA



Seoul-3WW
A0139903

3 x1W warm white LED 15°

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 3x 1 watt warm white LED
- Colour temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 3,5 Watt
- Dimensions: 86,5 x 86,5 x 35 mm

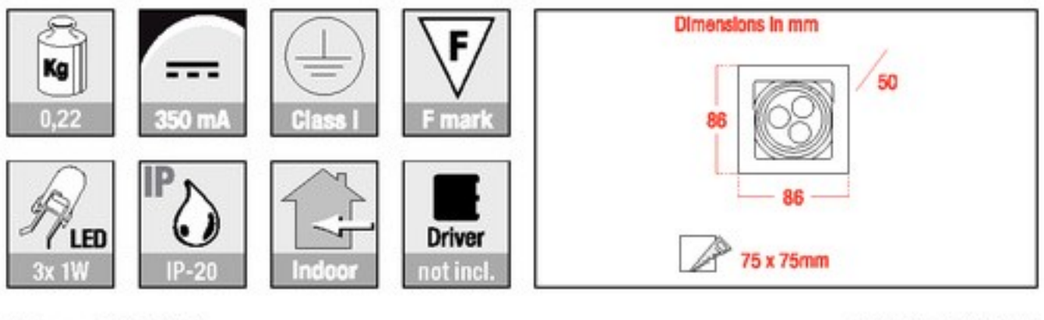




Seoul-6WW
A0139906

6 x1W warm white LED 15°

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 6x 1 watt warm white LED
- Colour temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 7 Watt
- Dimensions: 173 x 86,5 x 35 mm

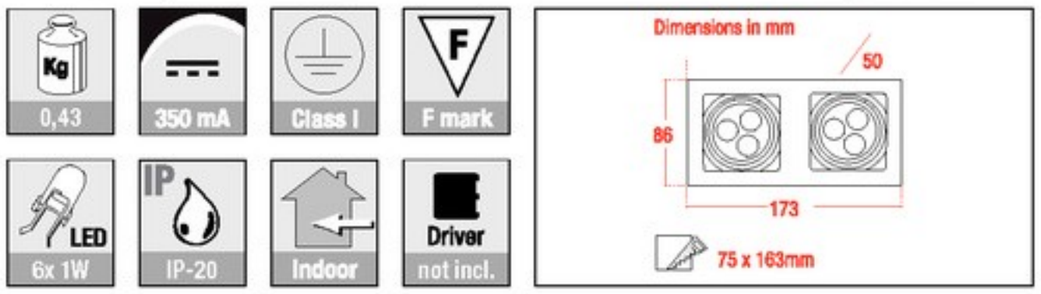



Down-lights




Frankfurt-1

A0130701
LED COMPATIBLE

Max. 50W MR16

- Housing: Polished aluminium
- Easy bulb change: Screw ring

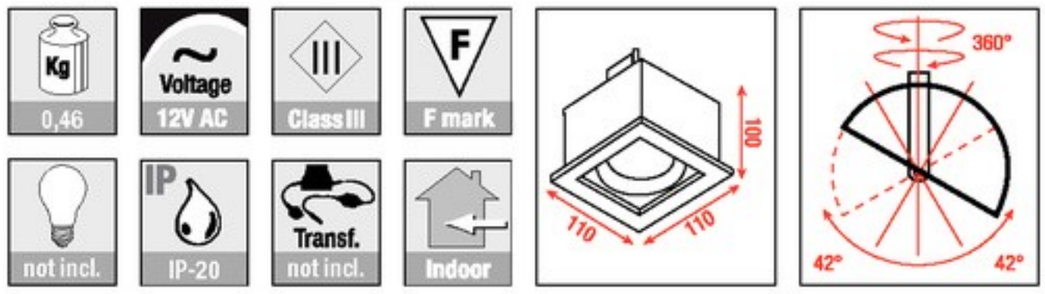




Frankfurt-2

A0130702
LED COMPATIBLE

Max. 2 x 50W MR16

- Housing: Polished aluminium
- Easy bulb change: Screw ring

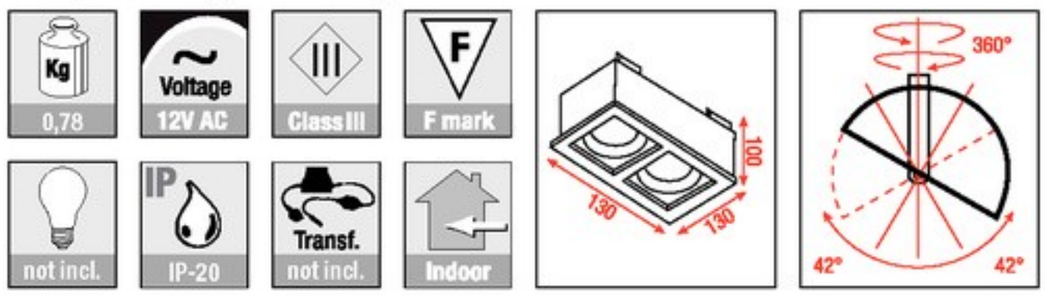




Frankfurt-3

A0130703
LED COMPATIBLE

Max. 3 x 50W MR16

- Housing: Polished aluminium
- Easy bulb change: Screw ring

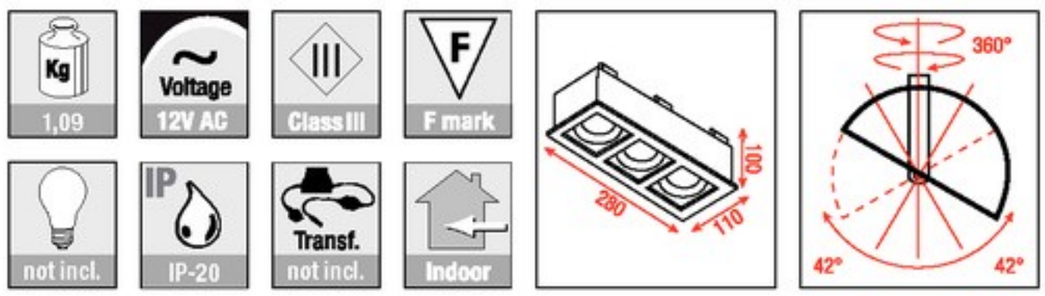




Frankfurt-4

A0130704
LED COMPATIBLE

Max. 4 x 50W MR16

- Housing: Polished aluminium
- Easy bulb change: Screw ring

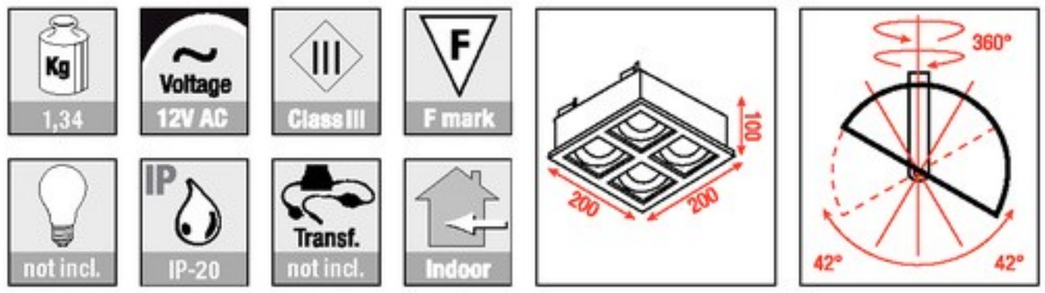

Down-lights



Down-lights




Dehli-S1

A0130744

LED COMPATIBLE

Single Down-light for 1 x Halospot 111 IRC

- Aluminium ring and square panel
- Included Transformer 35-105W

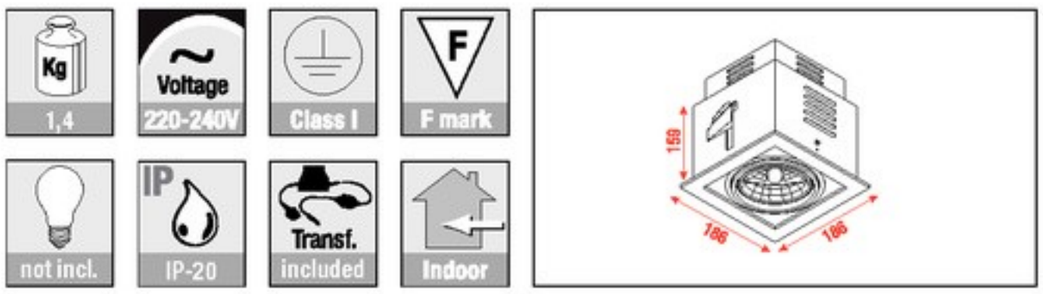



Dehli-S2

A0130734

Single Down-light for 1 x Powerball HCI R111 70W GX-8.5

- Aluminium ring and square panel
- With built-in electronic ballast (Philips)






Dehli-D1

A0130724

LED COMPATIBLE

Double Down-light for 2 x Halospot 111 IRC

- Aluminium ring and square panel
- Included Transformer 100-210VA

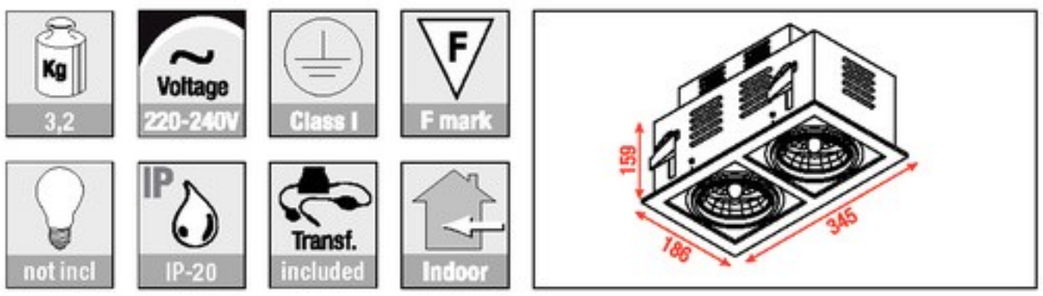




Dehli-T

A0130714

Triple Down-light for 2 x Halospot 111 IRC & 1 x Powerball HCI R111 70W GX-8.5

- Aluminium ring and square panel
- Included Transformer 100-210VA
- With built-in electronic ballast (Philips)

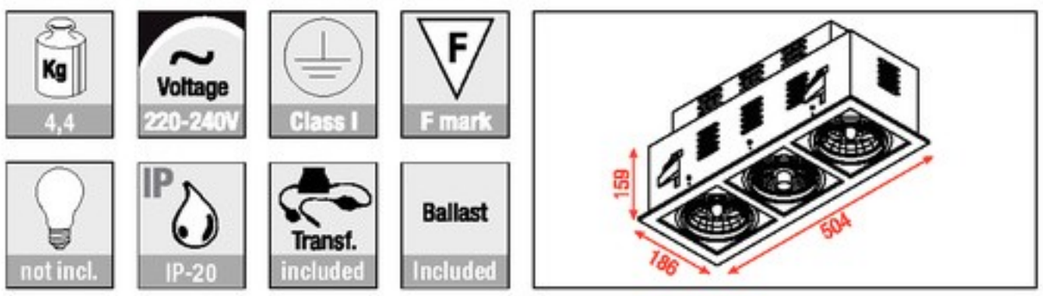

Down-lights



Down-lights




Down-lights

Madrid-1RW A0130790

White (RAL9003),
Round single ceiling frame

- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,05 kg
- Dimensions: ø180 x 3 mm

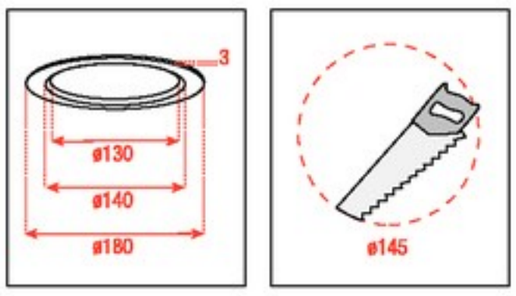




Madrid-1SQW A0130791

White (RAL9003),
Square single ceiling frame

- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,05 kg
- Dimensions: 180 x 180 x 3 mm

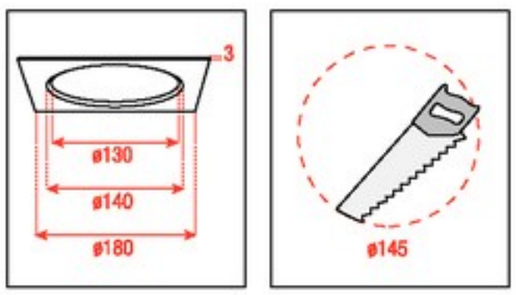




Madrid-2W A0130792

White (RAL9003),
Square ceiling frame duo

- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,09 kg
- Dimensions: 332 x 180 x 3 mm

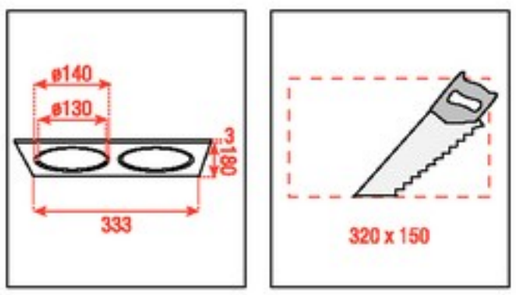





Madrid-3W A0130793

White (RAL9003),
Square ceiling frame trio

- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,14 kg
- Dimensions: 490 x 180 x 3 mm

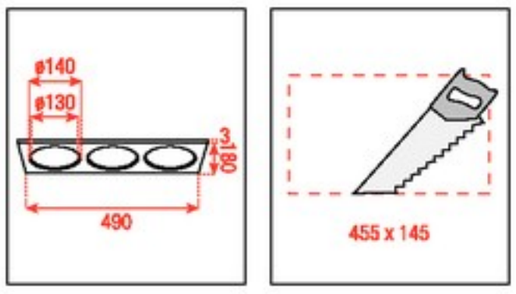


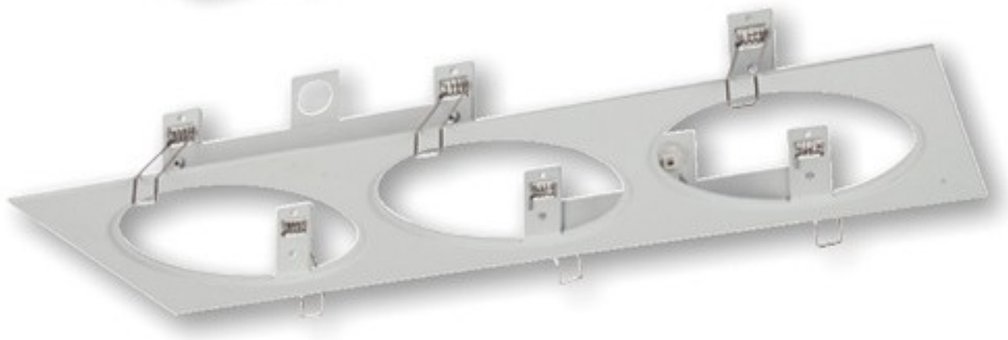


Madrid-4W A0130794

White (RAL9003),
Square ceiling frame quatro

- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,2 kg
- Dimensions: 332 x 332 x 3 mm

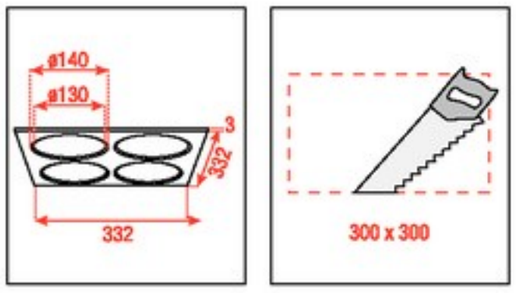

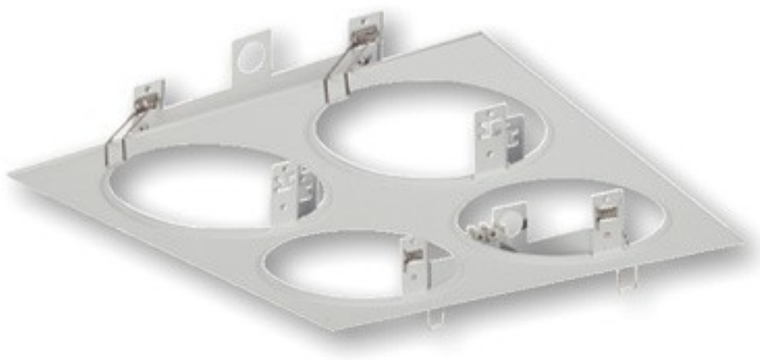



Down-lights




Madrid-100W **A0130750**

LED COMPATIBLE

White (RAL9003), QR-111 G53 max. 100W

- Excluded AET transformer
- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,16 kg
- Dimensions: ø140 x 55 mm

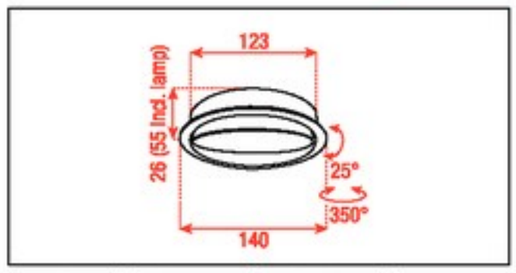





Madrid-27W **A0130780**

LED COMPATIBLE

White (RAL9003), PAR-30 E27 max. 75W

- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,25 kg
- Dimensions: ø140 x 110 mm







Madrid-30W **A0130781**

White (RAL9003), CDM-R30 E27 max. 70W

- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,25 kg
- Dimensions: ø140 x 110 mm





Suitable for (spec's on p. 39):

Madrid-1RW A0130790



Madrid-1SQW A0130791



Madrid-2W A0130792



Down-lights

Madrid-7010W A0130760

White (RAL9003), 10° reflector, CDM-T G12 max. 70W

- Excluded ballast
- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,46 kg
- Dimensions: ø140 x 170 mm







Madrid-7024W A0130761

White (RAL9003), 24° reflector, CDM-T G12 max. 70W

Madrid-7045W A0130762

White (RAL9003), 45° reflector, CDM-T G12 max. 70W

- Excluded ballast
- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,46 kg
- Dimensions: ø140 x 170 mm







Madrid-13W A0130770


White (RAL9003), TCDE-13W G24Q-3

Madrid-18W A0130771

White (RAL9003), TCDE-18W G24Q-2


- Excluded ballast
- Housing: Aluminum
- Color: white powder-coated (RAL 9003)
- Weight: 0,32 kg
- Dimensions: ø140 x 170 mm



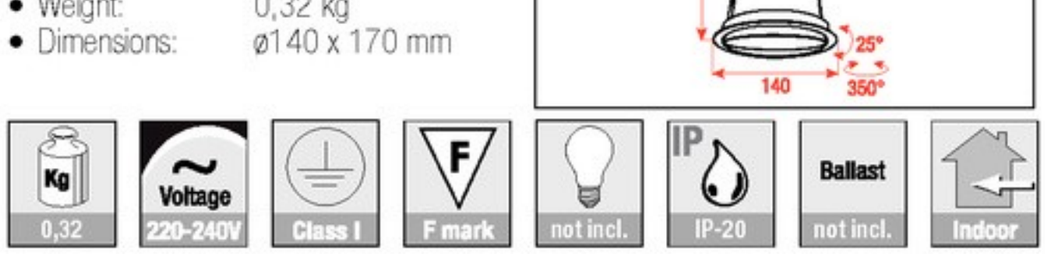



Madrid-3W A0130793

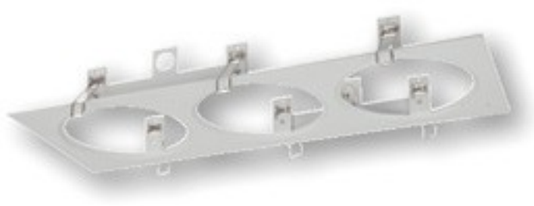

Madrid-4W A0130794






Münster-26 A0131101

TC-D 26W g24D-3

- Housing: Die cast aluminium
- Reflector: Pure anodized aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel
- Including: Internal Ballast

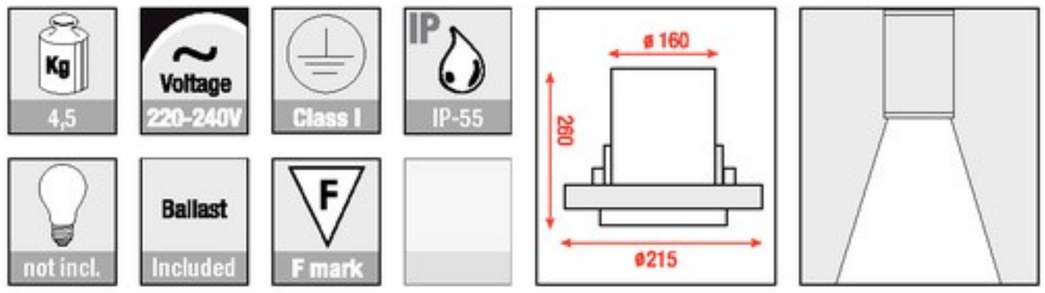





Münster-70 A0131102

CDM-T g12 70W

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel
- Including: Internal Ballast

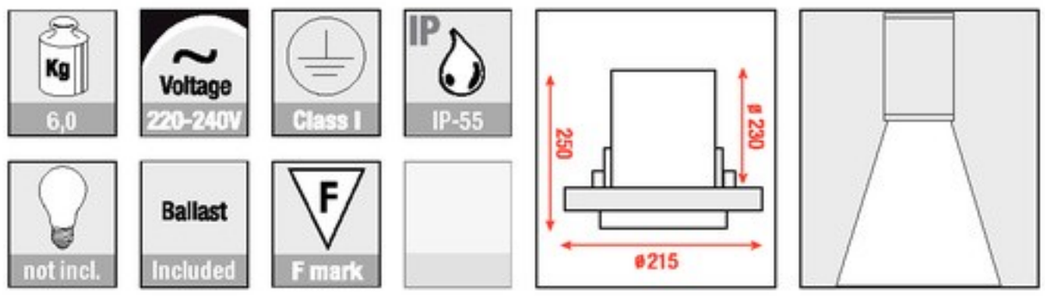

Down-lights

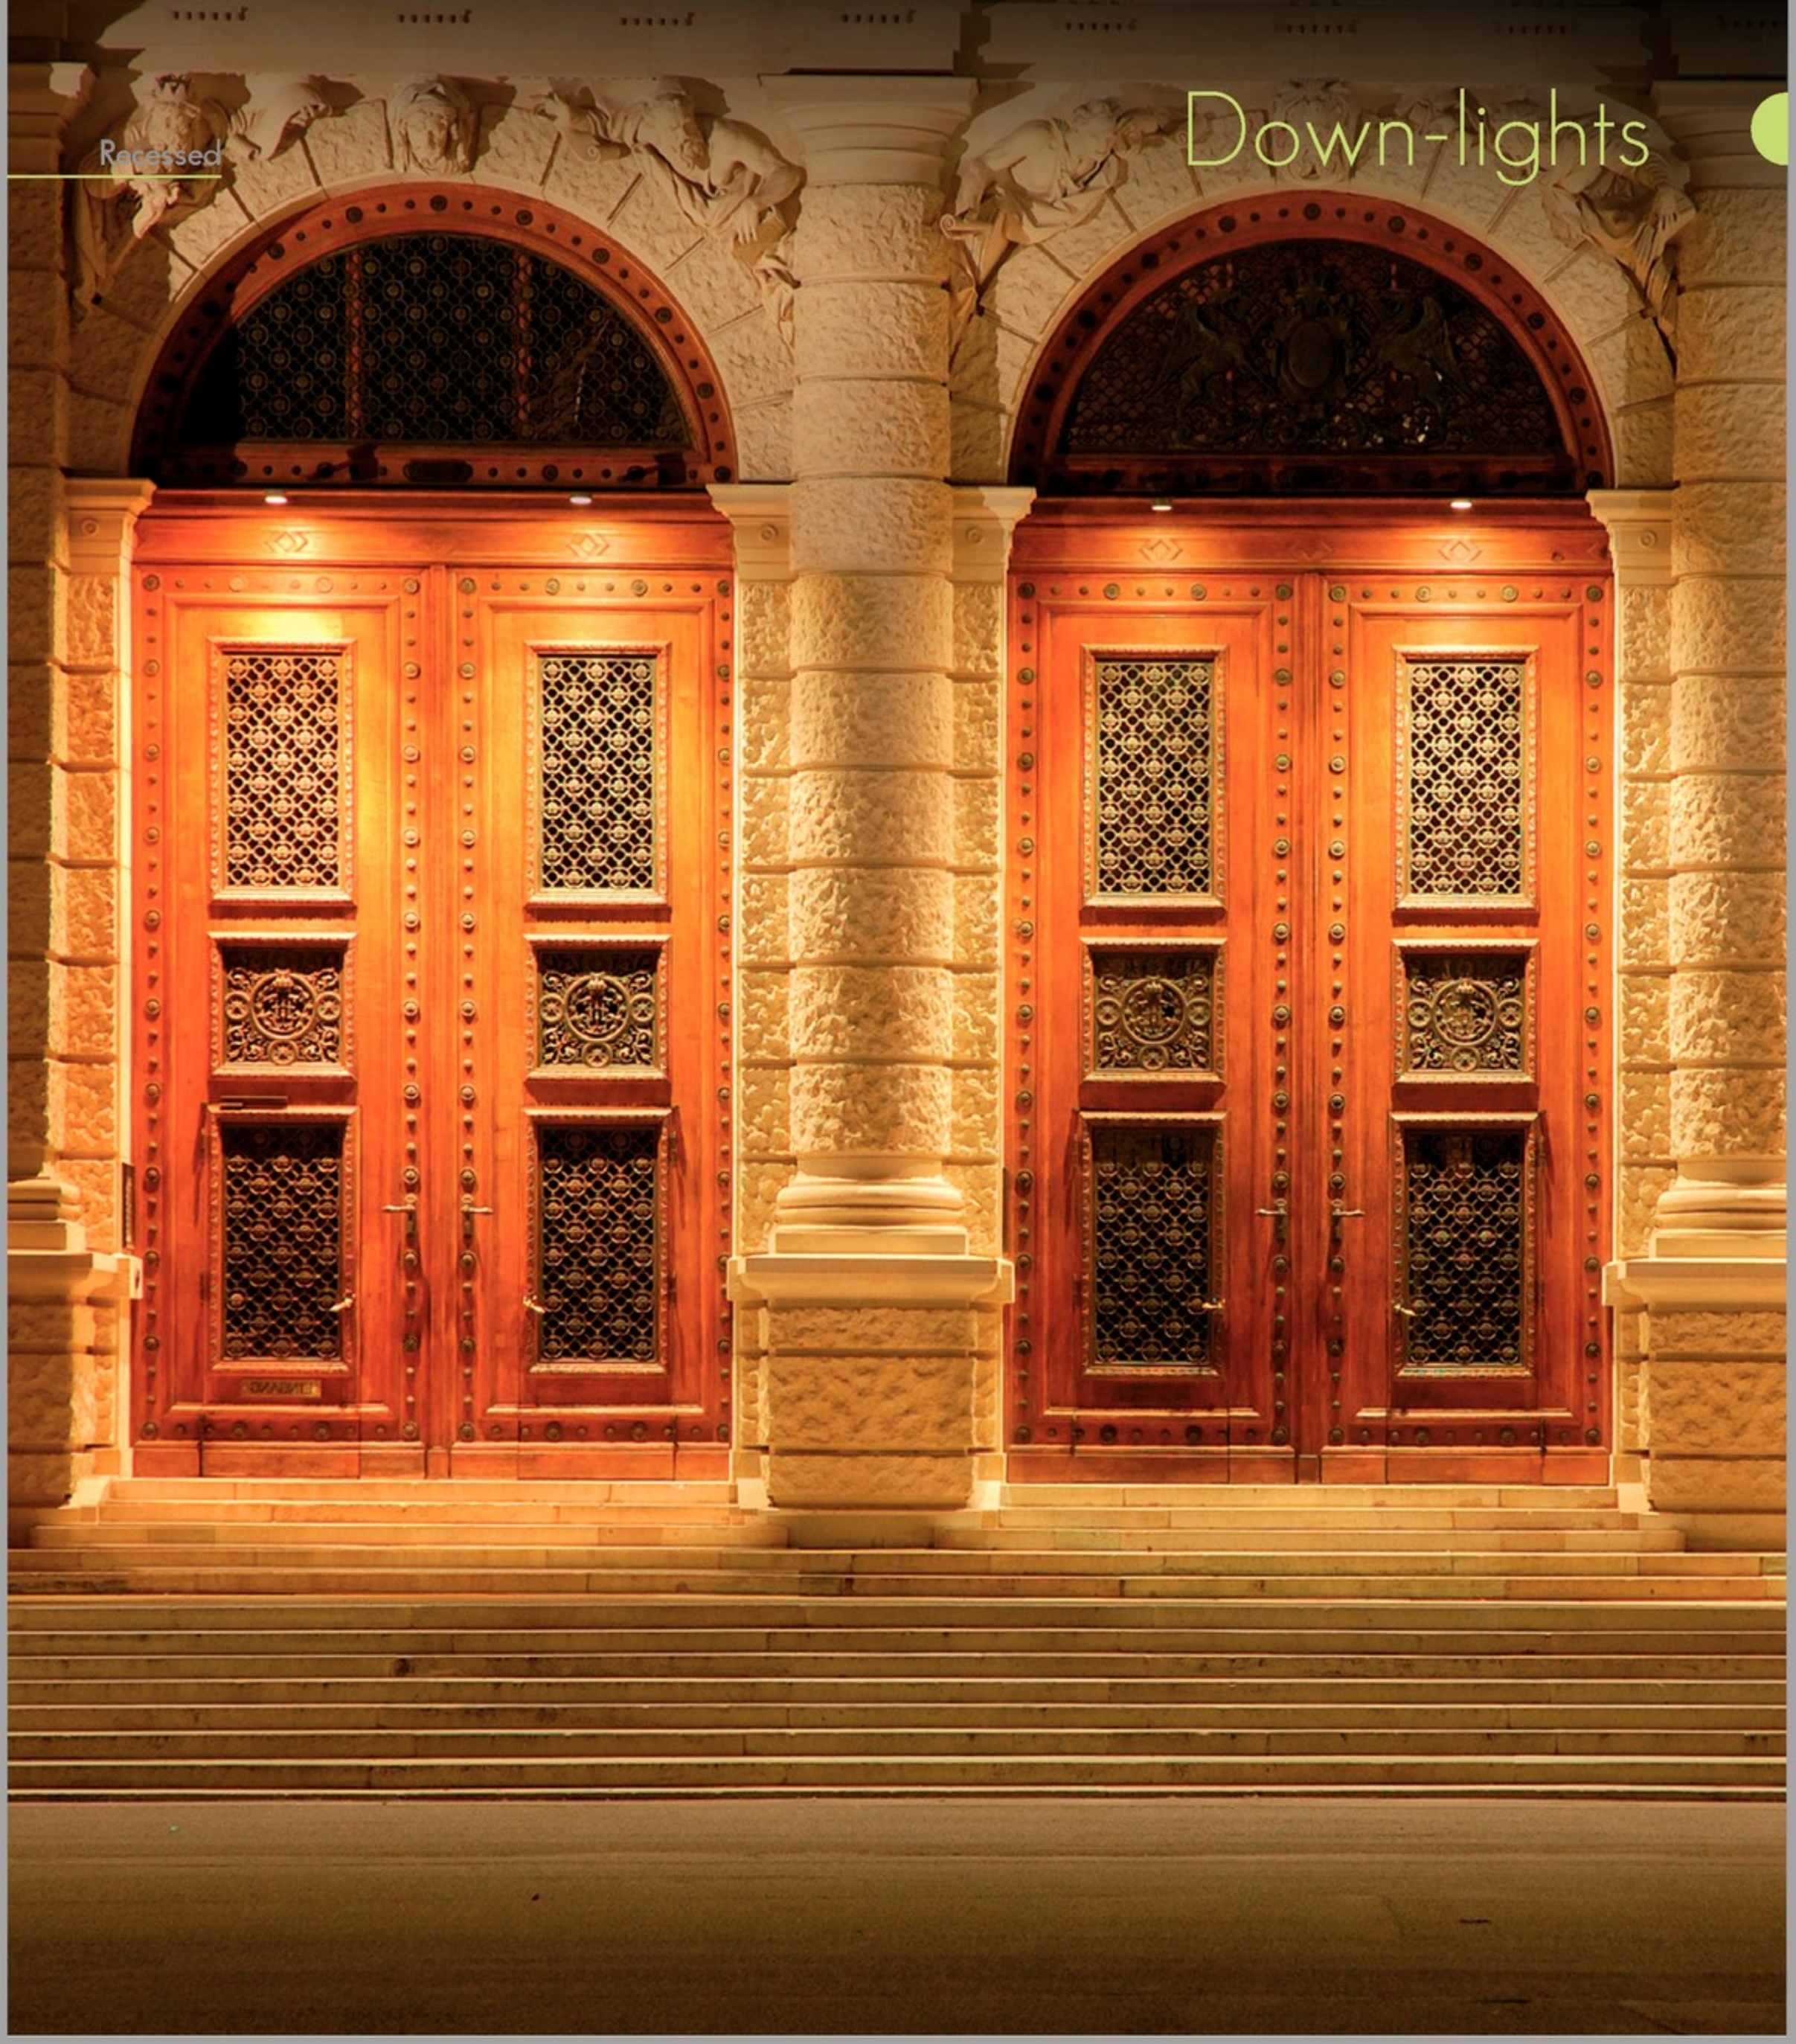




Brisbane-M

A0140011

With internal Ballast

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel

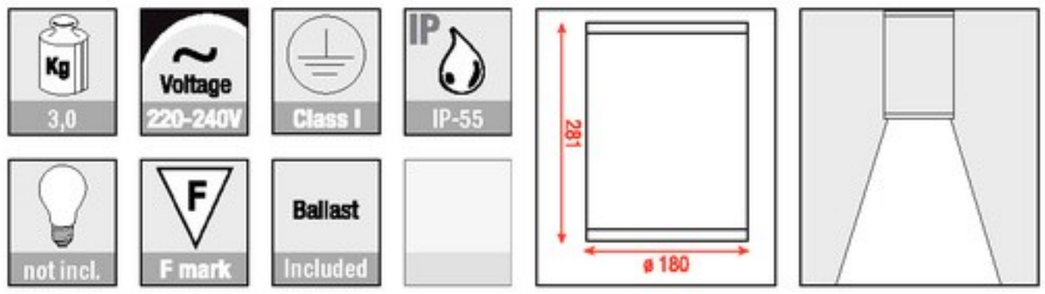




Brisbane-L

A0140012

With internal Ballast

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel

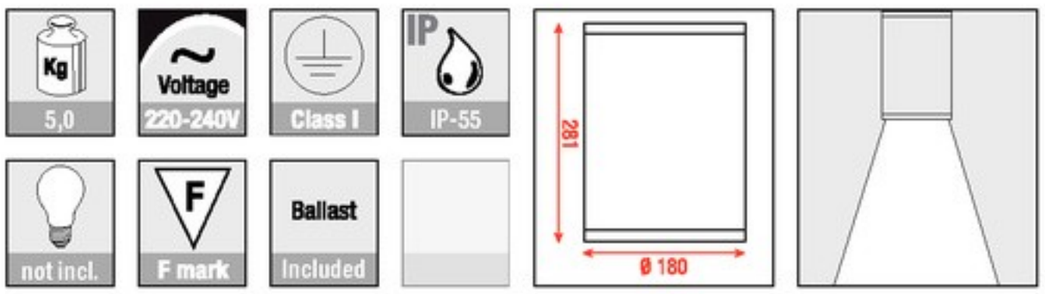

Down-lights


Auckland-1

A0140021

LED COMPATIBLE

Max. 35W, Aluminiumreflector MR16

- Housing: Polished aluminium
- Lampholder: gu-10

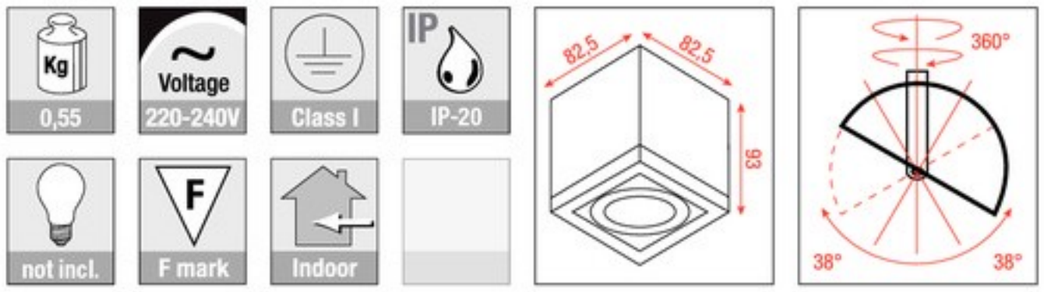




Auckland-2

A0140022

LED COMPATIBLE

Max. 2 x 35W, Aluminiumreflector MR16

- Housing: Polished aluminium
- Lampholder: gu-10

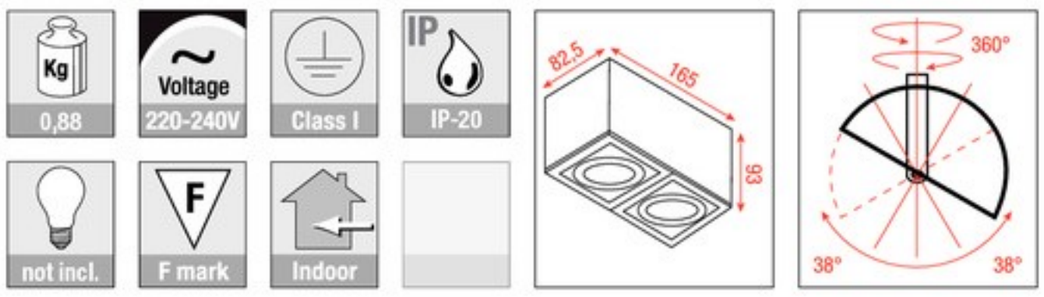




Auckland-3

A0140023

LED COMPATIBLE

Max. 3 x 35W, Aluminiumreflector MR16

- Housing: Polished aluminium
- Lampholder: gu-10

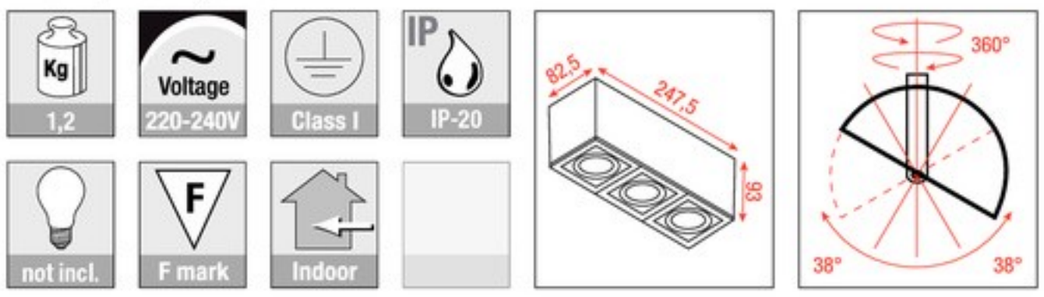




Auckland-4

A0140024

LED COMPATIBLE

Max. 4 x 35W MR16

- Housing: Polished aluminium
- Lampholder: gu-10

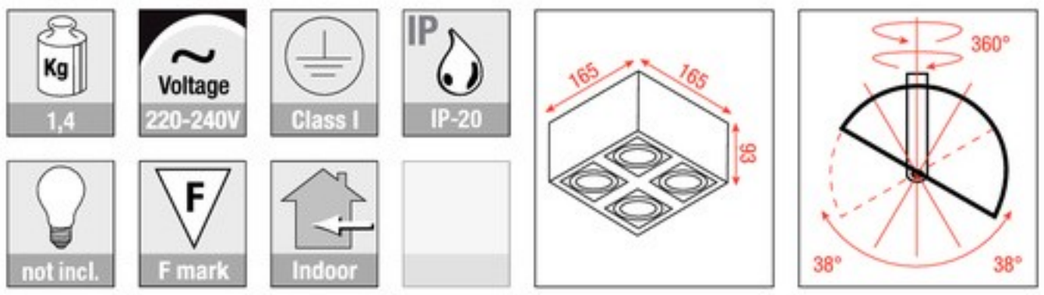



Down-lights


Visual by M.Bahnen, Highlite International B.V.

Down-lights

Melbourne-1 WW — A0140031

1 x 1W warm-white LED 15°

- Included built-in trafo/LED-driver
- Aluminium housing
- Weight: 0,4 kg
- Dimensions: 80 x 80 x 65 mm
- IP classification: IP-20
- Power connection: 220-240V
- Power consumption: 1,3W

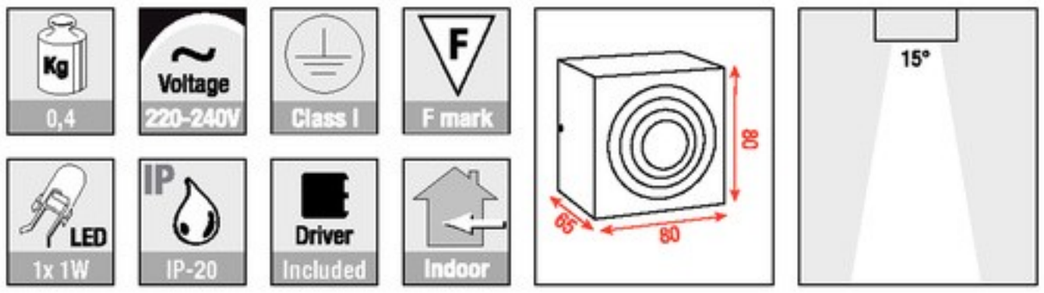




Melbourne-2 WW — A0140032

2 x 1W warm-white LED 15°

- Included built-in trafo/LED-driver
- Aluminium housing
- Weight: 0,66 kg
- Dimensions: 165 x 80 x 65 mm
- IP classification: IP-20
- Power connection: 220-240V AC
- Power consumption: 2,6W

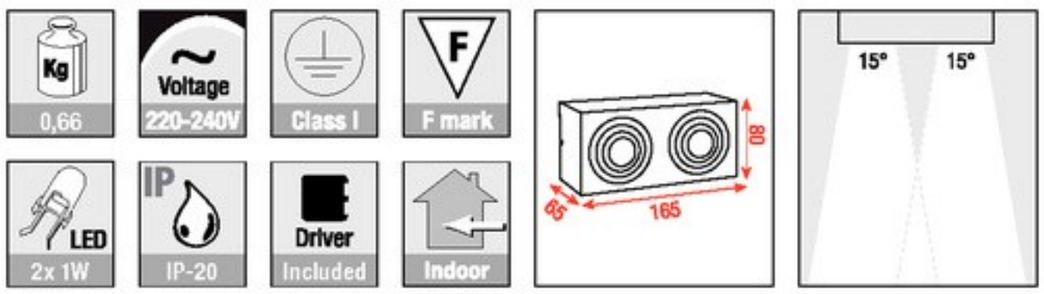




Melbourne-3 WW — A0140033

3 x 1W warm-white LED 15°

- Included built-in trafo/LED-driver
- Aluminium housing
- Weight: 0,9 kg
- Dimensions: 245 x 80 x 65 mm
- IP classification: IP-20
- Power connection: 220-240V AC
- Power consumption: 3,9W

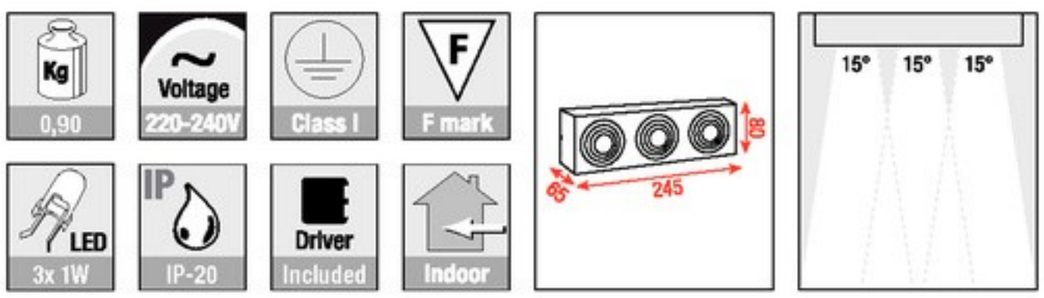



Down-lights

LED TECHNOLOGY




Tokyo-6WW

A0140027

6 x1W warm white LED

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 6x 1 watt warm white LED
- Color temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 7 Watt
- Dimensions: 100 x 100 x 83,5 mm

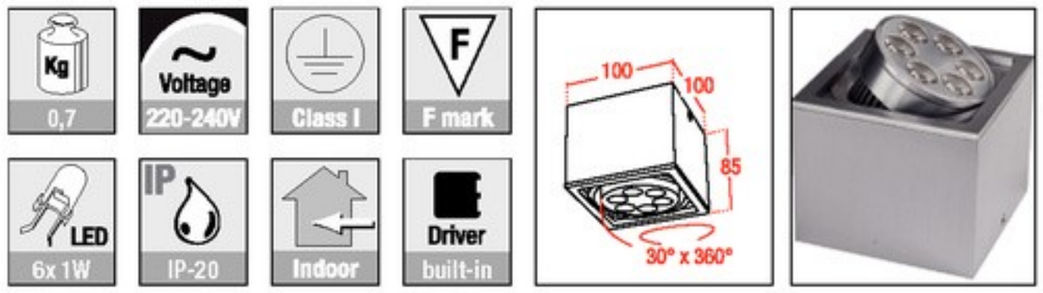




Sidney-8WW

A0140028

8 x1W warm white LED

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 8x 1 watt warm white LED
- Color temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 9 Watt
- Dimensions: 182 x 100 x 100 mm

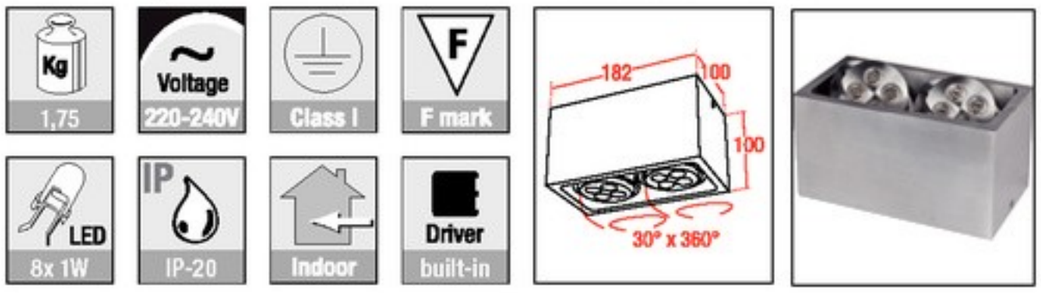




Bangkok-8WW

A0140030

8 x1W warm white LED

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 8x 1 watt warm white LED
- Color temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 9 Watt
- Dimensions: 130 x 70 x 70 mm

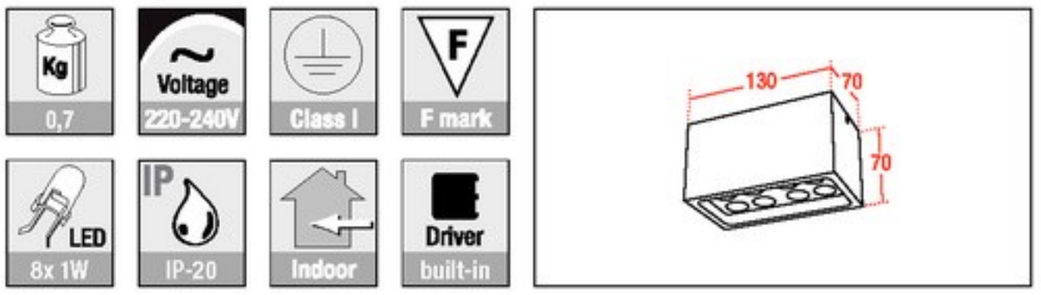

Down-lights







Parma-1

A0240081

1 x 1W warm-white LED

- Light direction: direct
- Excluded LED driver
- Power consumption: 1,3W
- Housing: Polished Aluminium
- Dimensions fixture: 75 x 63 x 270 mm

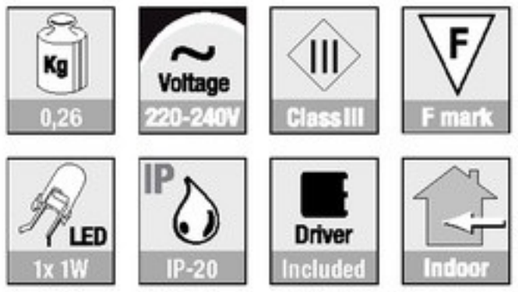

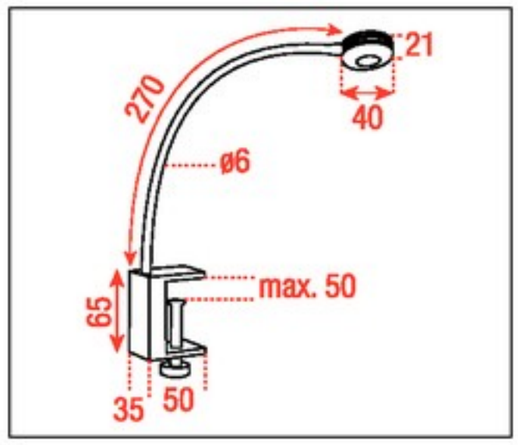





Parma-2

A0240082

3 x 1W warm-white LED

- Light direction: direct
- Excluded LED driver
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: L= 270 mm

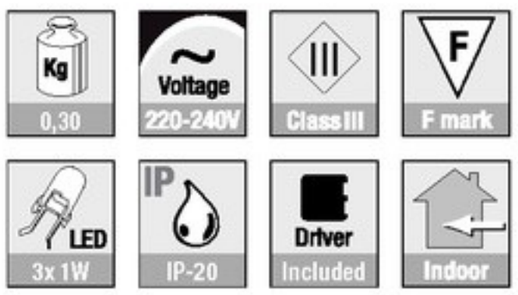

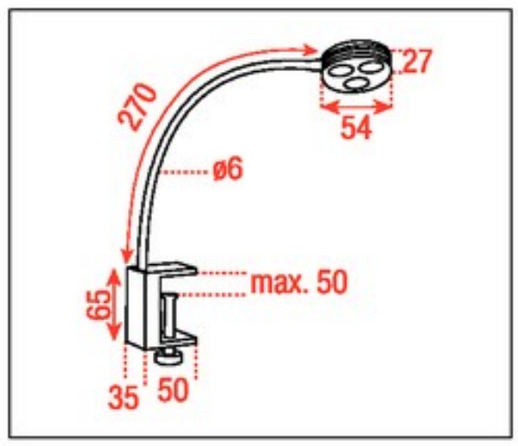





Parma-3

A0240083

3 x 1W warm-white LED

- Light direction: direct
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: L= 270 mm

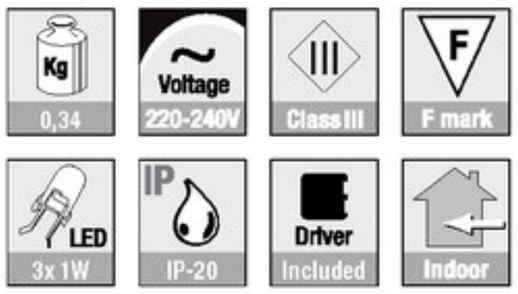

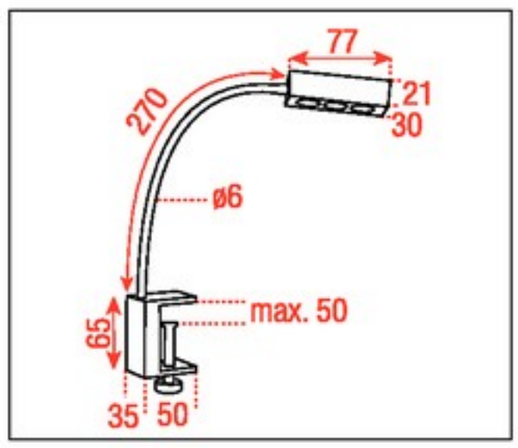

Wall lights







Modena-S Recessed

A0230054

LUMI LED 1W, Warm white

- Included LED driver
- Input Voltage: 230V AC
- Housing: Aluminium

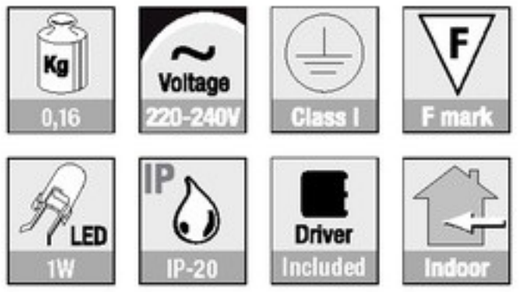

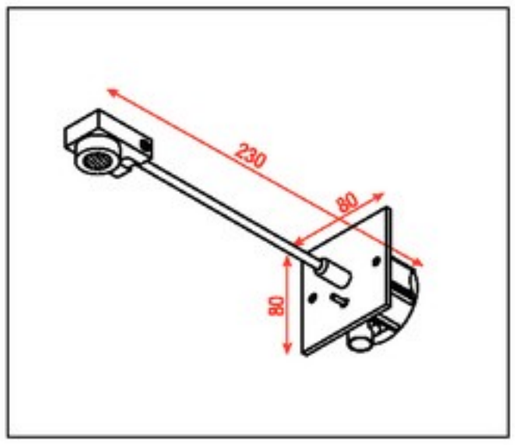





Modena-L Recessed

A0230056

LUMI LED 1W

- Included LED driver
- Input Voltage: 230V AC
- Housing: Aluminium

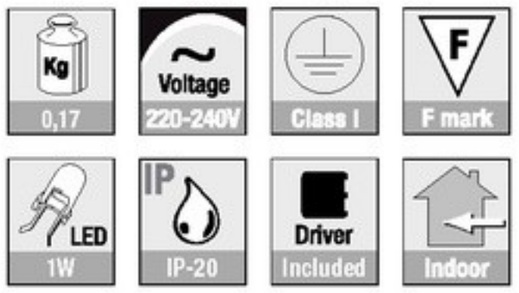

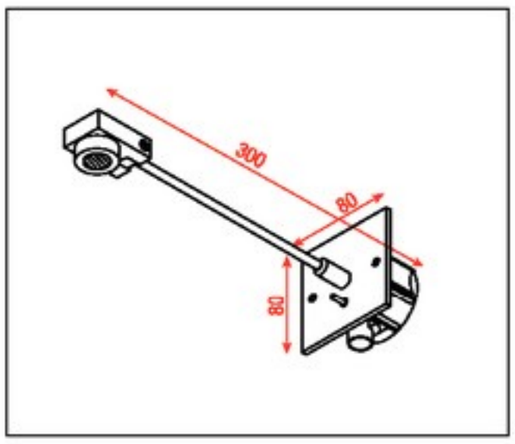





Torino-L Recessed

A0230058

LUMI LED 1W

- Included LED driver
- Input Voltage: 230V AC
- Housing: Aluminium

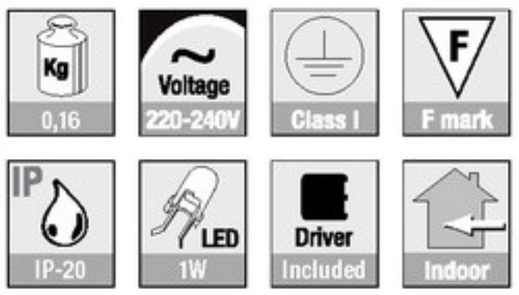

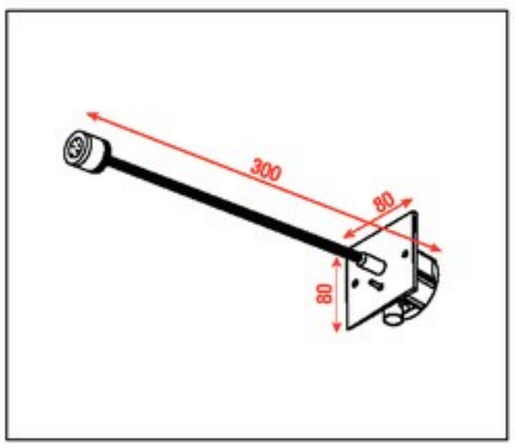


Wall lights


Modena-S Surface

A0240053

LUMI LED 1W, Warm white

- Included LED driver
- Input Voltage: 230V AC
- Housing: Aluminium

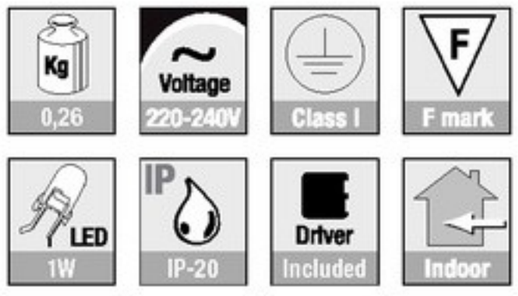

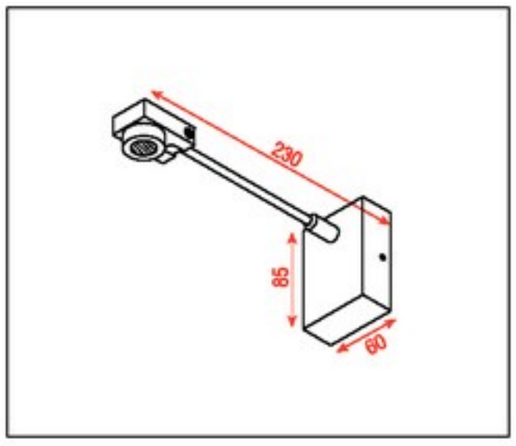





Modena-L Surface

A0240055

LUMI LED 1W

- Included LED driver
- Input Voltage: 230V AC
- Housing: Aluminium

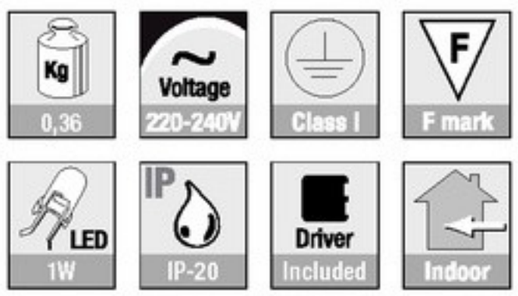

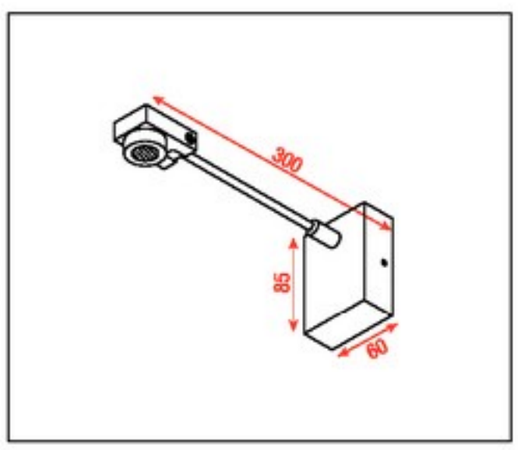





Torino-L Surface

A0240057


LUMI LED 1W

- Included LED driver
- Input Voltage: 230V AC
- Housing: Aluminium

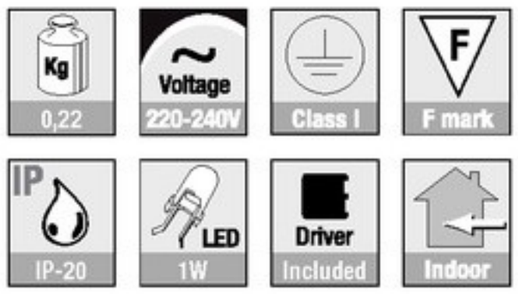

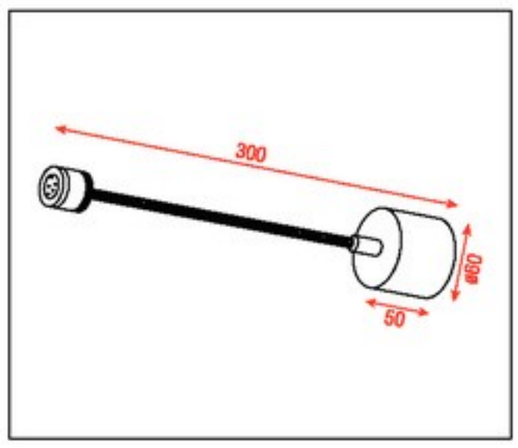



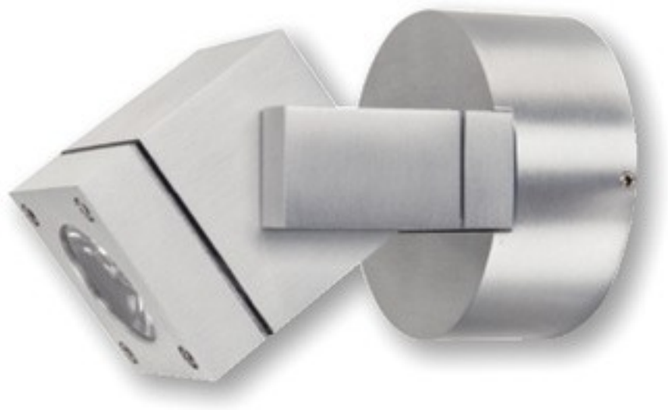



Alabama-3SQ

A0240640

1x 3W warm-white LED, Square

- Light direction: direct
- Built-in LED driver
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: ø75x76x117mm

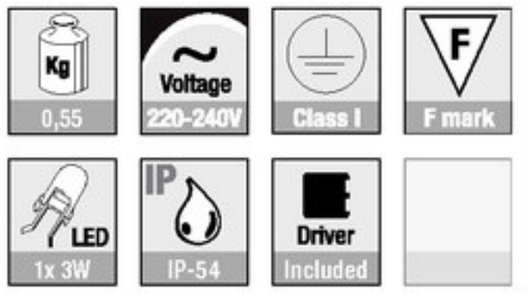

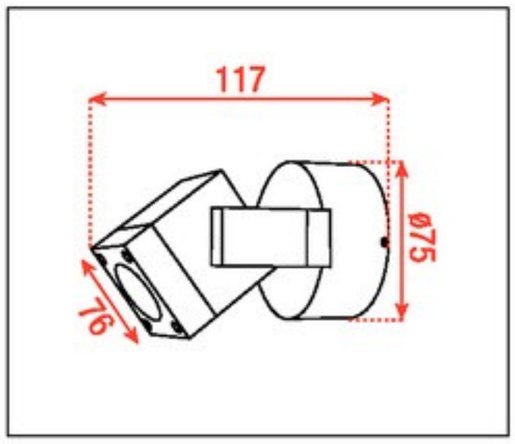





Alabama-3R

A0240641

1 x 1W warm-white LED, Round

- Light direction: direct
- Built-in LED driver
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: ø75x76x117mm

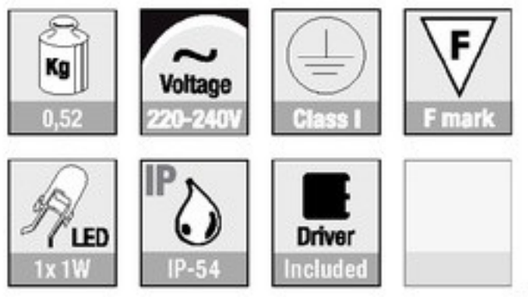

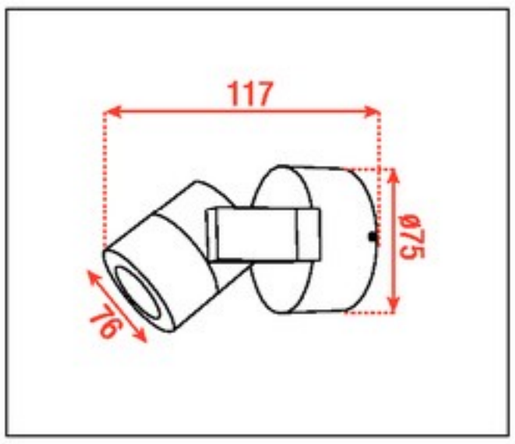





Trento-3

A0240084

1x 3W warm-white LED

- Light direction: adjustable
- Included LED driver
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: 73 x 73 x 73 mm

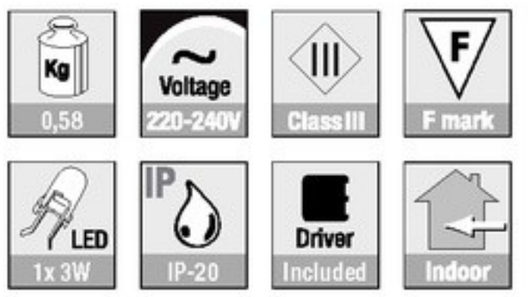

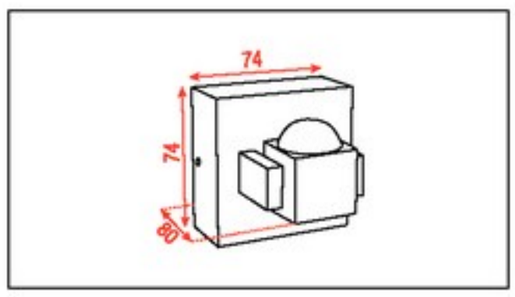

Wall lights

Visual by M.Bahnen, Highlite International B.V.

Wall lights



Wall lights


Berlin-1WW — A0230730

18 x Warm White LED's ø5 mm (1,4W)

Berlin-1B — A0230731

18 x Blue LED's ø5 mm (1,4W)

- Stainless steel trim
- Die cast aluminium housing
- Super bright LED's
- Power and LED driver (included)
- 5 mm tempered glass
- Brass cable gland
- Lifetime/H: 100.000

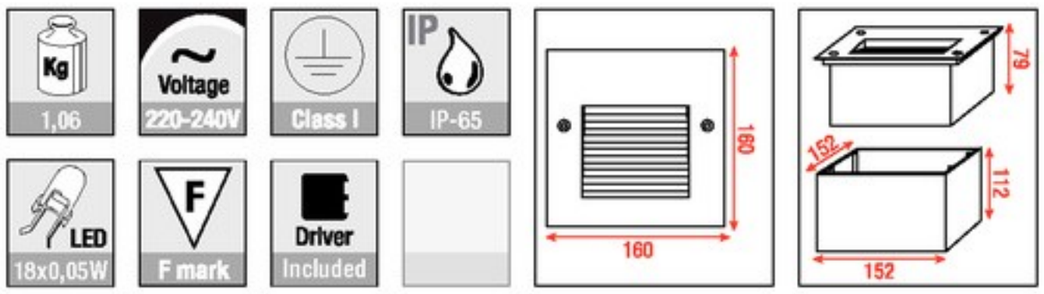




Berlin-2WW — A0230710

20 x Warm White LED's ø5 mm (1,5W)

Berlin-2B — A0230711

20 x Blue LED's ø5 mm (1,5W)

- Stainless steel trim
- Die cast aluminium housing
- Super bright LED's
- Power and LED driver (included)
- 5 mm tempered glass
- Brass cable gland
- Lifetime/H: 100.000

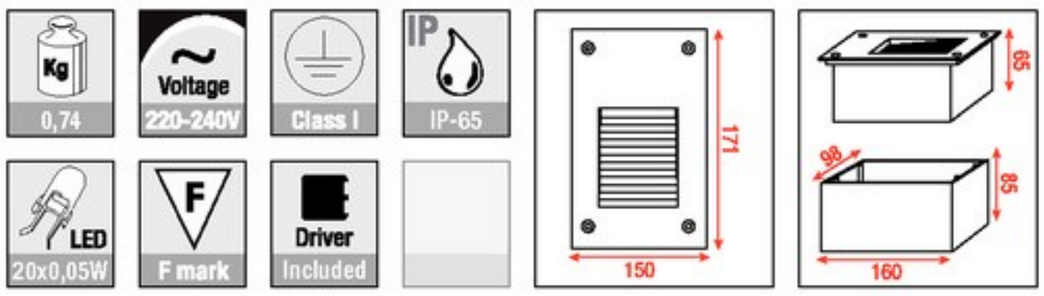




Berlin-3WW — A0230720

24 x Warm White LED's ø5 mm (1,6W)

Berlin-3B — A0230721

24 x Blue LED's ø5 mm (1,6W)

- Stainless steel trim
- Die cast aluminium housing
- Super bright LED's
- Power and LED driver (included)
- 5 mm tempered glass
- Brass cable gland
- Lifetime/H: 100.000

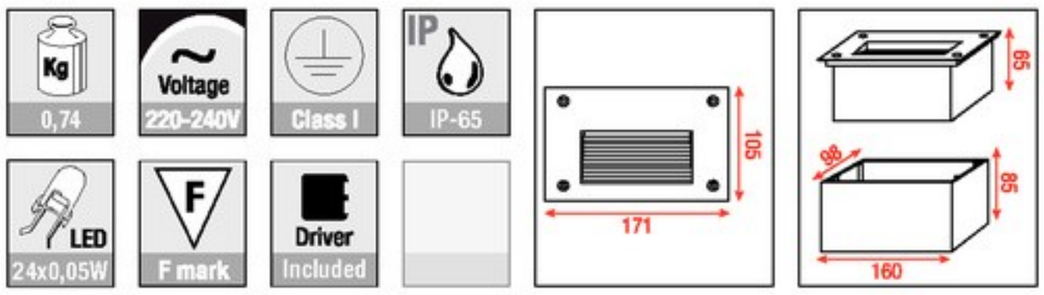






Bremen-1WW

A0230751

1 x1W warm white LED

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 1x 1 watt warm white LED
- Colour temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 1,2 Watt
- Dimensions: 70 x 67 x 58 mm

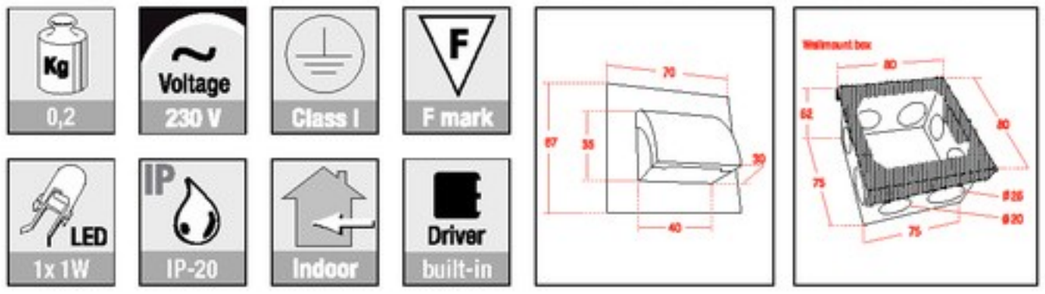




Bremen-2WW

A0230752

2 x1W warm white LED

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 2x 1 watt warm white LED
- Colour temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 2,4 Watt
- Dimensions: 120 x 67 x 58 mm

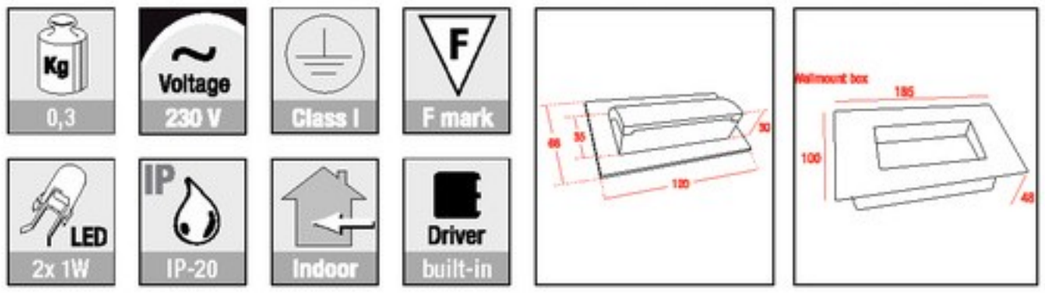

Wall lights

Visual by M.Bahnen. Highlite International B.V.







Oslo-R LED WW **A0230025**

1x 1W warm-white LED, light-direction: down/direct

- Housing: solid Aluminium (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Operating Power: constant current 350mA (1W)

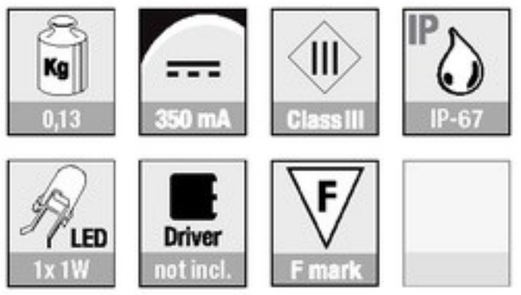

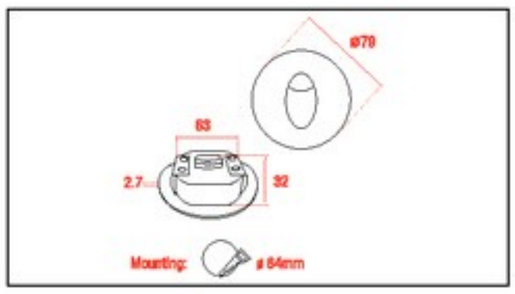







Oslo-SQ LED WW **A0230026**

1x 1W warm-white LED, light direction: down/direct

- Housing: solid Aluminium (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Operating Power: constant current 350mA (1W)

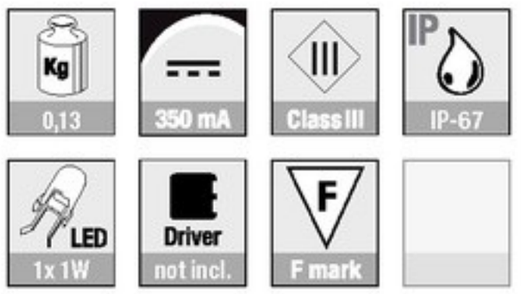

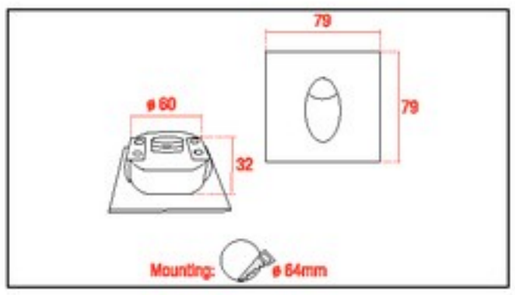



Wall lights

Baltimore-SQ WW — A0230019

1x 1W (max. 1x 3W) warm-white LED, adjustable light beam

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Operating Power: constant current 350mA - 700mA

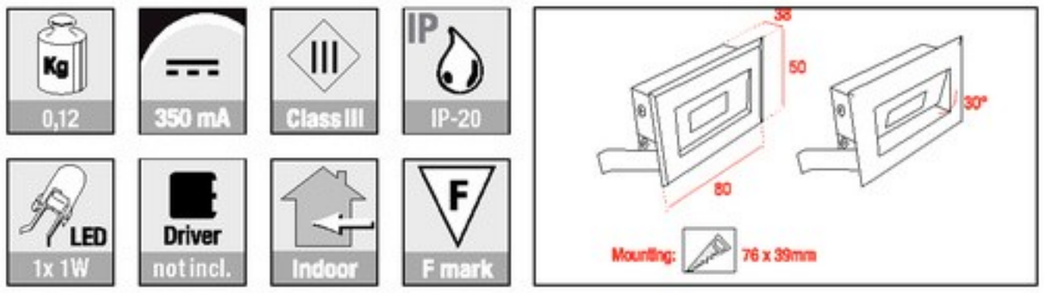


Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950010	LED dimmable driver universal Max. 25W




Madras-45R LED WW — A0230220

1 x 1W warm-white LED, light direction: direct

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Operating Power: constant current 350mA (1W)
  max. load 700mA = 3W)

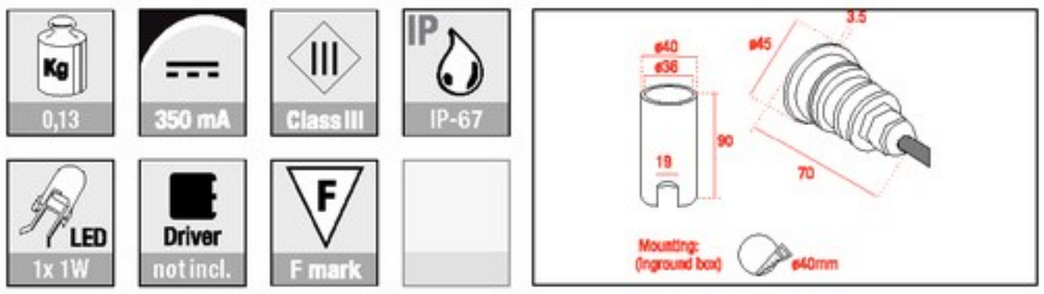


Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950010	LED dimmable driver universal Max. 25W



Madras-45SQ LED WW — A0230221

1x 1W warm-white LED, light direction: direct

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Operating Power: constant current 350mA (1W)
- max. load 700mA = 3W)

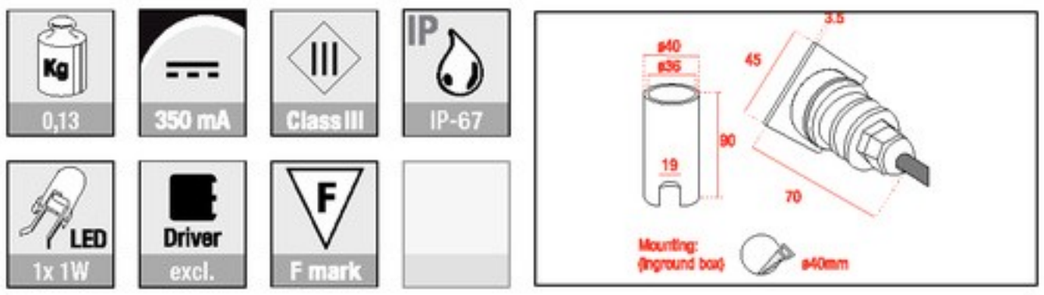

Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950002	LED constant current driver 350mA/1-4W
	A9950003	LED constant current driver 350mA/1-8W
	A9950010	LED dimmable driver universal Max. 25W





Visual by M.Bahnen, Highlite International B.V.

LED TECHNOLOGY




Girona WW


A0230031

1 x 1W warm-white LED 15°

- excluded (external) LED driver
- Aluminium housing
- Weight: 0,08 kg
- Dimensions: ø46 x H46 mm
- Mounting: ø32 mm
- IP classification: IP-20 Class-I
- Power connection: LED Driver 350mA 1-3W + 3AP (excluded)



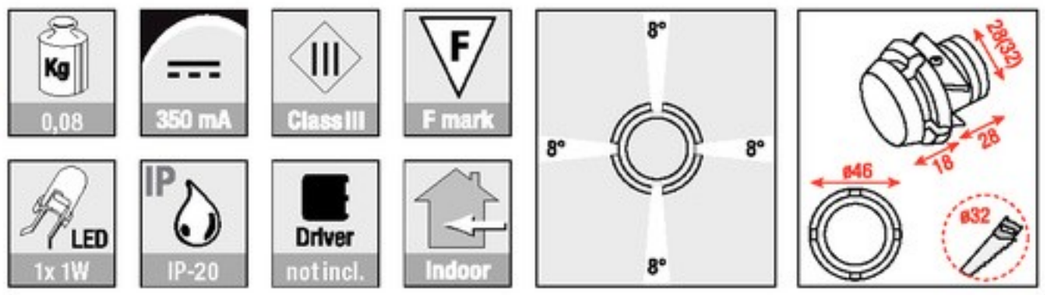

Driver		
	A9950001	LED constant current driver DC 350mA/1x3W
	A9950003	LED constant current driver 350mA/1-8W
	A9950010	LED dimmable driver universal Max. 25W


Wall lights

Trento-1

A0230081

2 x 1W warm-white LED

- Light direction: direct
- Excluded LED driver
- Power consumption: 2,7W
- Housing: Polished Aluminium
- Dimensions fixture: 80 x 80 x 43 mm

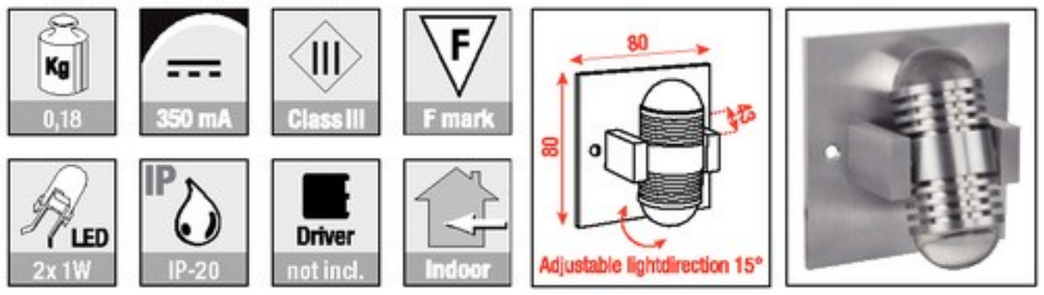




Trento-2

A0230082

2 x 1W warm-white LED

- Light direction: direct
- Excluded LED driver
- Power consumption: 2,7W
- Housing: Polished Aluminium
- Dimensions fixture: 80 x 80 x 43 mm

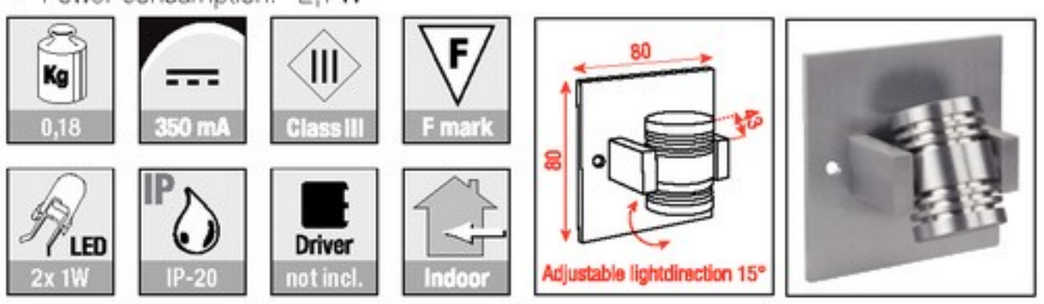





Tromsø-9 RGB


3 x 3W RGB in one


- LED Beam angle: 45°
- Operating Power: 24V DC
- Power consumption: 12W
- Weight: 0,5 kg
- Dimensions fixture: 182 x 57 x 80 mm
- Classification: IP-65 Class I

Advised controller: A9915001 (not incl.)

Advised powersupplies:
60110 DC 24V 50W (max. 4 Tromsø-18 RGB)
60111 DC 24V 100W (max. 8 Tromsø-18 RGB)
60112 DC 24V 150W (max. 12 Tromsø-18 RGB)
60113 DC 24V 200W (max. 16 Tromsø-18 RGB)
60114 DC 24V 350W (max. 29 Tromsø-18 RGB)

A0230306

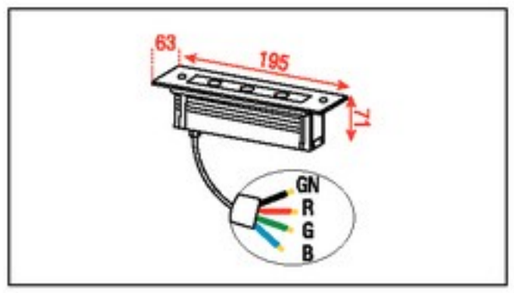

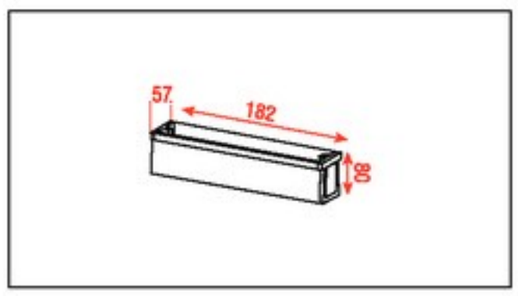



Controller	
	A9915001 LED Controller 12-24VDC 8A/CH DMX & Standalone



Tromsø-18 RGB


6 x 3W RGB in one


- LED Beam angle: 45°
- Operating Power: 24V DC
- Power consumption: 24W
- Weight: 1,1 kg
- Dimensions fixture: 328 x 57 x 80 mm
- Classification: IP-65 Class I

Advised controller: A9915001 (not incl.)

Advised powersupplies:
60110 DC 24V 50W (max. 2 Tromsø-18 RGB)
60111 DC 24V 100W (max. 4 Tromsø-18 RGB)
60112 DC 24V 150W (max. 6 Tromsø-18 RGB)
60113 DC 24V 200W (max. 8 Tromsø-18 RGB)
60114 DC 24V 350W (max. 14 Tromsø-18 RGB)

A0230606

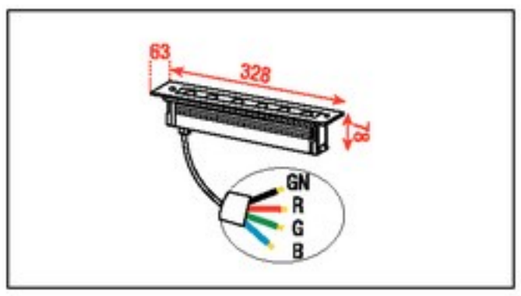

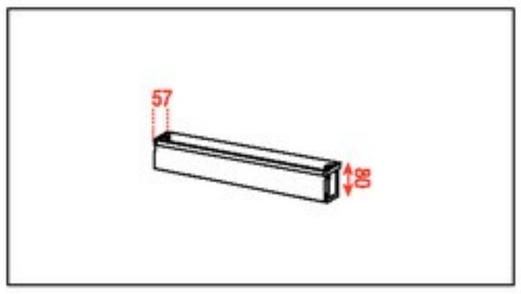



Controller	
	A9915001 LED Controller 12-24VDC 8A/CH DMX & Standalone


Wall lights



Helsinki-R-WW **A0230001**
Warm White - With Built in LED Driver

Helsinki-R-B **A0230002**
Blue - With Built in LED Driver

- Housing: Polished aluminium
- LED's: LUXEON

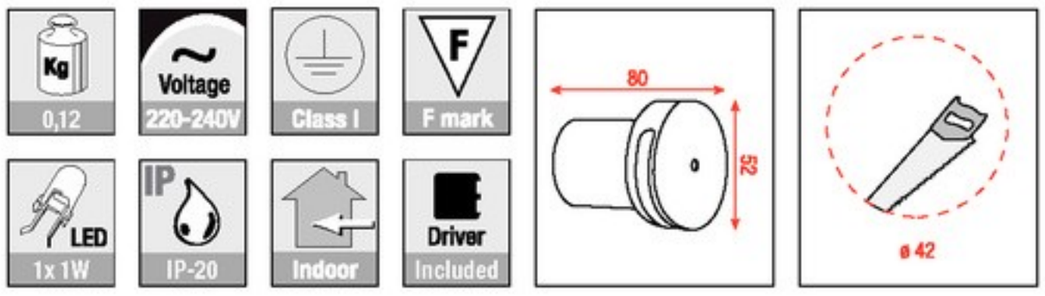




Helsinki-SQ-WW **A0230011**
Warm White - With Built in LED Driver

Helsinki-SQ-B **A0230012**
Blue - With Built in LED Driver

- Housing: Polished aluminium
- LED's: LUXEON

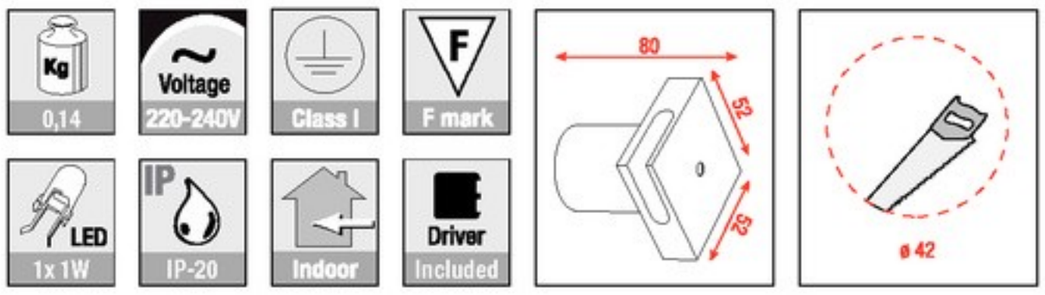




Helsinki-S-WW **A0230021**
Warm White - With Built in LED Driver

Helsinki-S-B **A0230022**
Blue - With Built in LED Driver

- Housing: Polished aluminium
- LED's: LUXEON

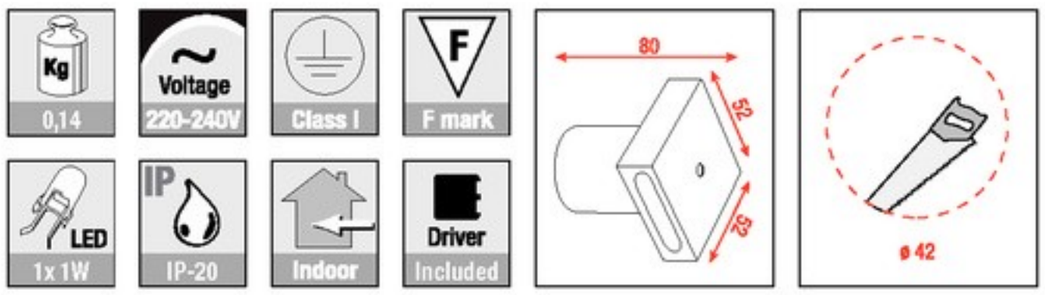


Wall lights

Aalborg-R-WW — A0240001
Warm White - With Built in LED Driver

Aalborg-R-B — A0240002
Blue - With Built in LED Driver

- Housing: Polished aluminium
- LED's: LUXEON

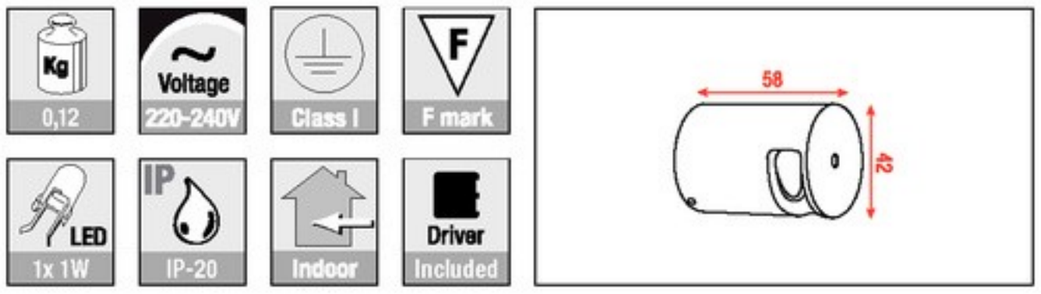





Aalborg-SQ-WW — A0240021
Warm White - With Built in LED Driver

Aalborg-SQ-B — A0240022
Blue - With Built in LED Driver

- Housing: Polished aluminium
- LED's: LUXEON

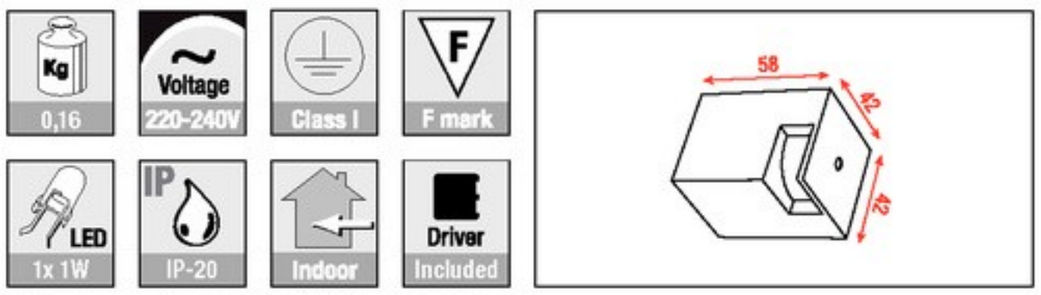


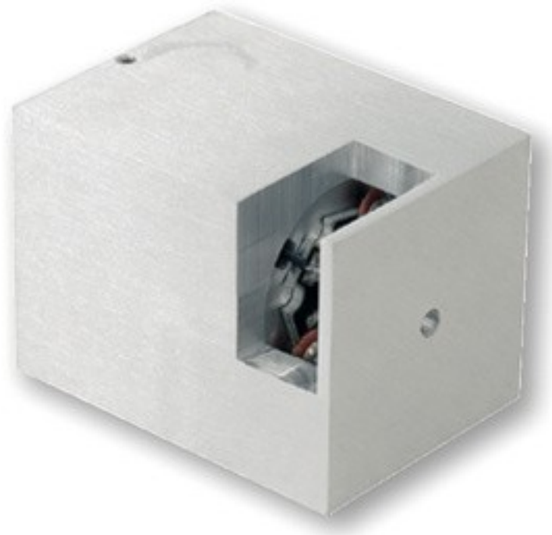

Aalborg-S-WW — A0240031
Warm White - With Built in LED Driver

Aalborg-S-B — A0240032
Blue - With Built in LED Driver

- Housing: Polished aluminium
- LED's: LUXEON

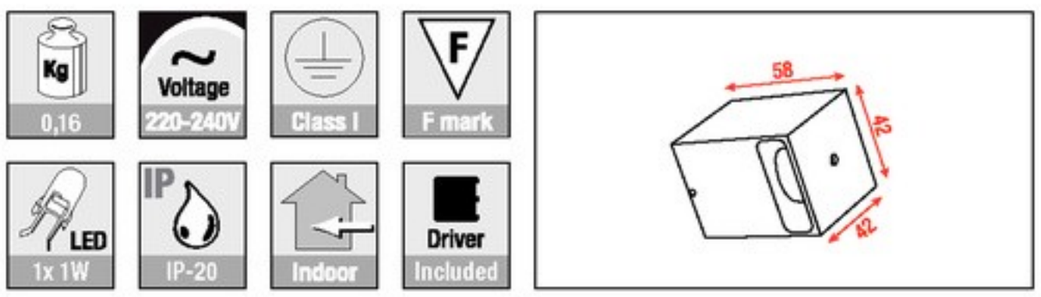



Wall lights



Visual by M.Bahnen, Highlite International B.V.


Wall lights

Verona-3WW

A0240062

1 x3W warm white LED

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: glas
- Light source: 1x 3 watt warm white LED
- Colour temperature: warm white
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 3,3 Watt
- Dimensions: 70x67x58mm

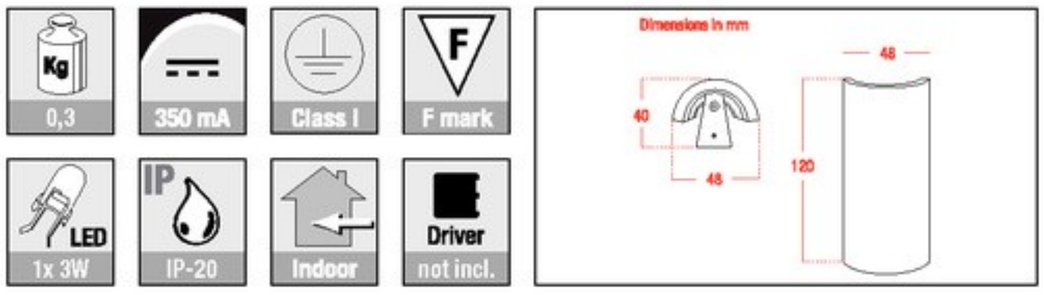




Milos

A0240061

g9-Halopin 25-40W

- Housing: Polished aluminium

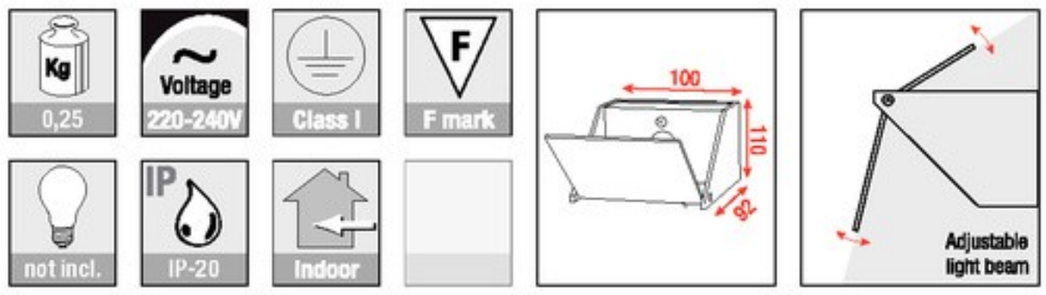




Malta-1

A0240071

g9-Halopin 25-40W

- Housing: Polished aluminium

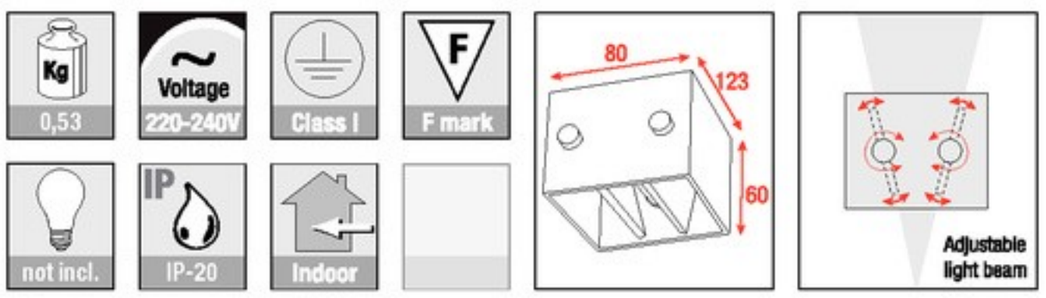




Malta-2

A0240072

g9-Halopin 25-40W

- Housing: Polished aluminium

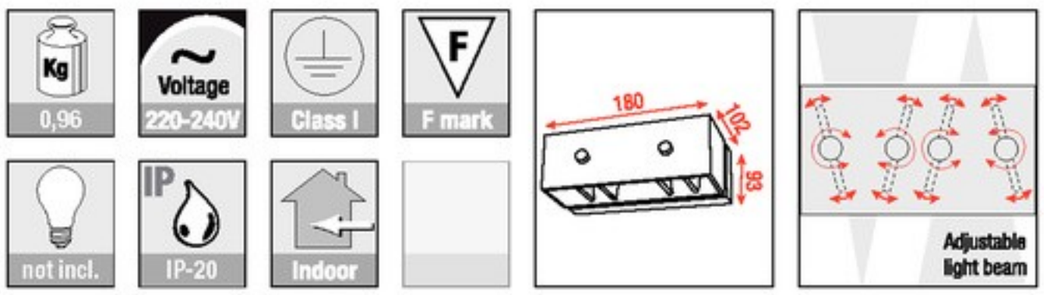



Wall lights




Visual by M.Bahnen, Highlite International B.V.

Wall lights

Granada CW — A0240512

1 x 4W cool white LED

- Included built-in trafo / LED-driver
- Aluminium housing
- Power consumption: 5,2W
- Weight: 0,32 kg
- Dimensions: 70 x 95 x 53 mm
- IP classification: IP-54 Class I
- Power connection: 220-240V AC

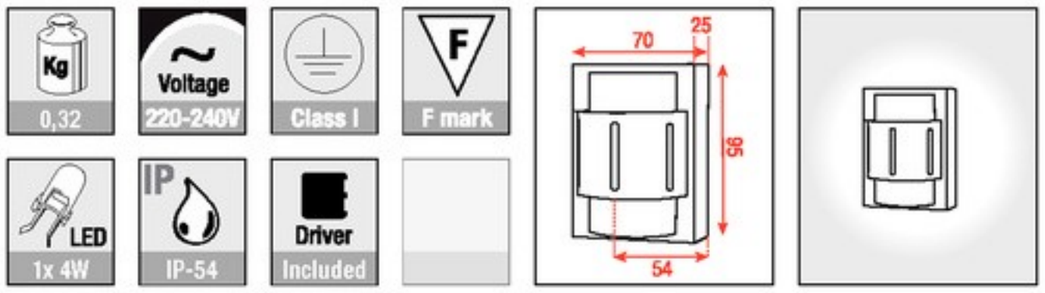




Zaragoza CW — A0240522

1 x 4W cool white LED

- Included built-in trafo / LED-driver
- Aluminium housing
- Power consumption: 5,2W
- Weight: 0,30 kg
- Dimensions: 70 x 95 x 57 mm
- IP classification: IP-54 Class I
- Power connection: 220-240V AC

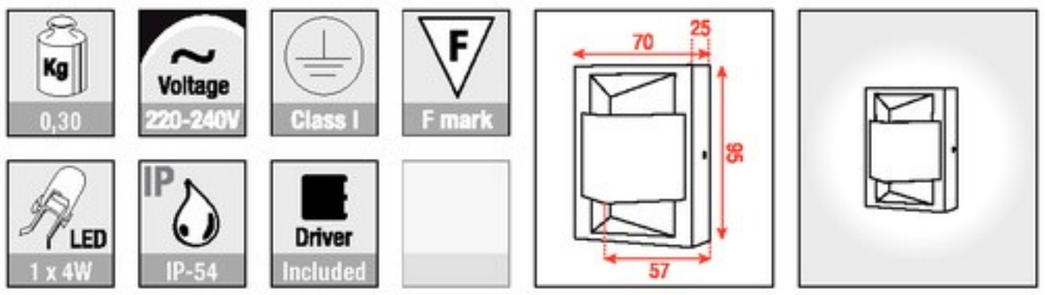




Toledo CW — A0240302

1x4W cool white LED

- Included built-in trafo / LED-driver
- Aluminium housing
- Power consumption: 5,2W
- Weight: 0,24 kg
- Dimensions: ø88 x D34 mm
- IP classification: IP-54 Class I
- Power connection: 220-240V AC

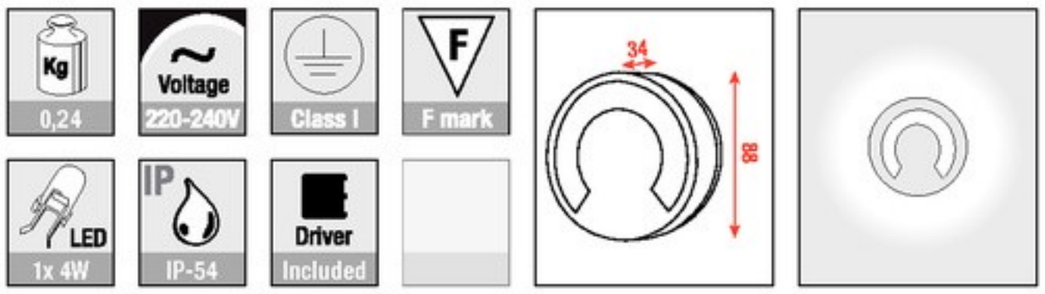




Toledo-2WW — A0240304

1 x 3W warm-white LED

- Light direction: direct
- Built-in LED driver
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: 80 x 80 x 51 mm

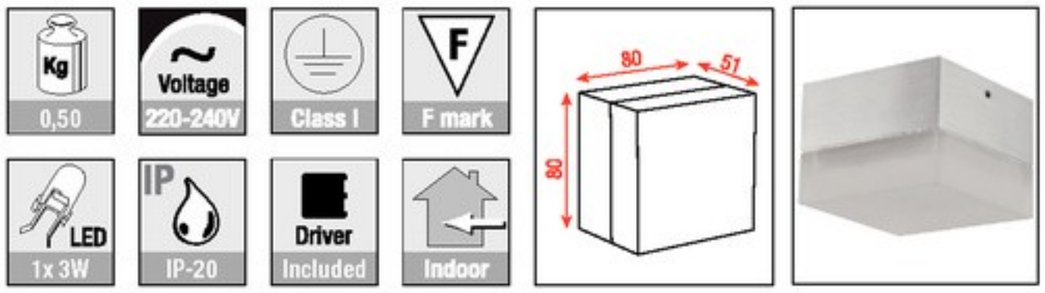






Venice-S — A0240041

g9-Halopin 25-40W


- Housing: Polished aluminium

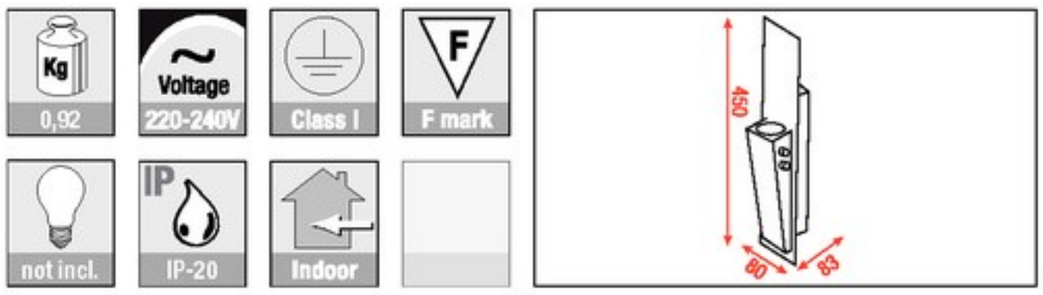

Venice-L — A0240042

gu513-MR16 max 50W

- Housing: Polished aluminium

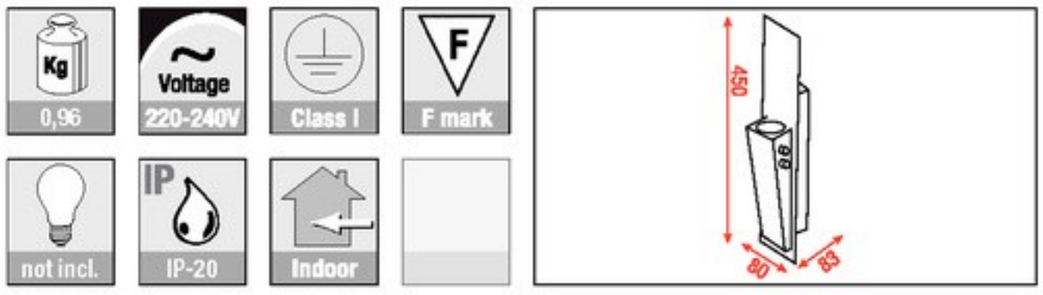




Pisa-SQ — A0240500

G9 max. 25W


- Aluminum housing
- Power consumption: 25W
- Weight: 0,48 kg
- Dimensions: 60 x 250 x 78 mm
- IP classification: IP-20 Class-1
- Power connection: 220-240V AC

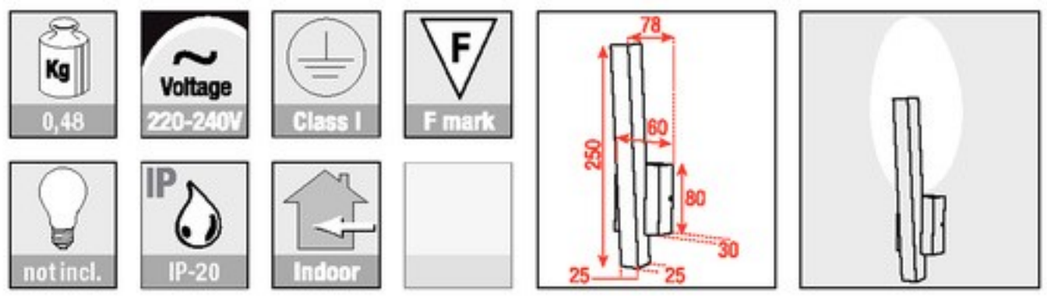

Pisa-R — A0240501

G9 max. 25W

- Aluminum housing
- Power consumption: 25W
- Weight: 0,46 kg
- Dimensions: 60 x 250 x 78 mm
- IP classification: IP-20 Class-1
- Power connection: 220-240V AC

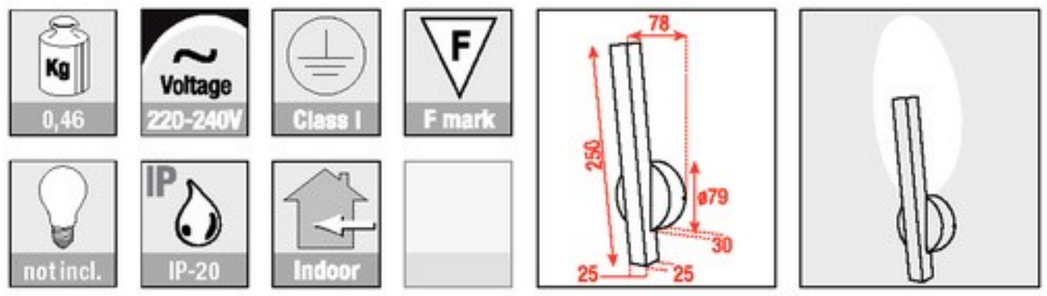

Wall lights

Visual by M.Bahnen, Highlite International B.V.

Wall lights



Visual by M.Bahnen, Highlite International B.V.


Wall lights

Malaga-M

A0240051

Spot, Short, Max. 35W gu-10

- Housing: Aluminium polished

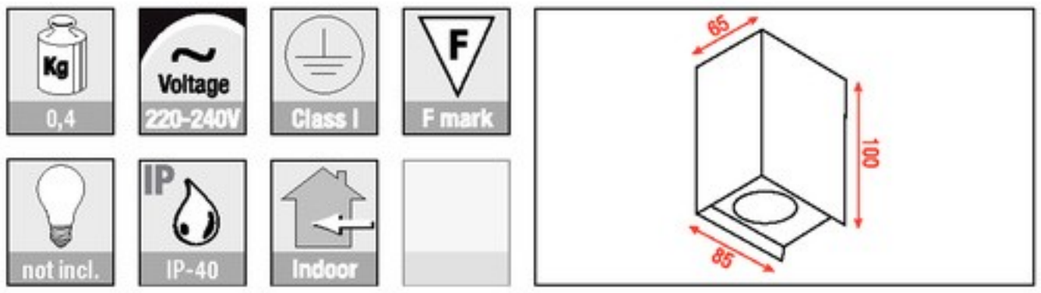




Malaga-L

A0240052

up/down Spot, Long, Max. 2x 35W gu-10

- Housing: Aluminium polished

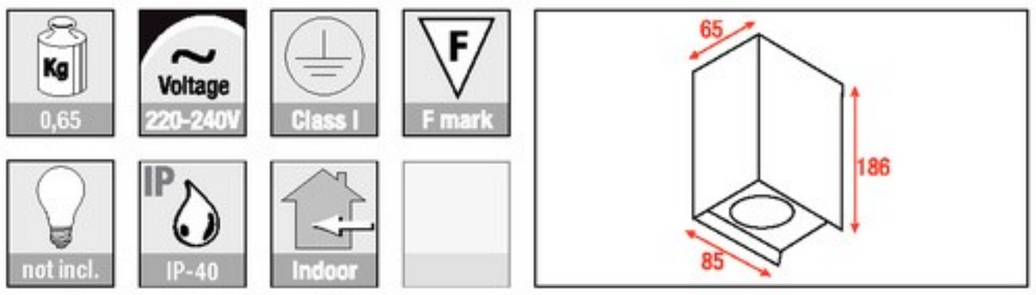




Medi-SQ

A0240131

Max. 2 x 35W up/down light gu-10

- Housing: Aluminium silver-grey powder coated RAL 9006

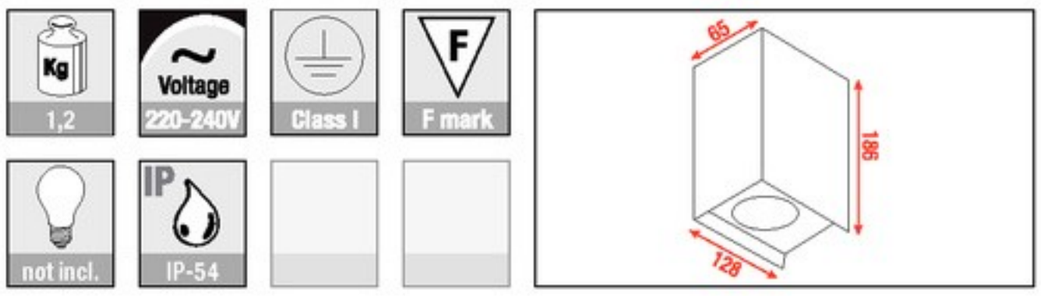






Detroit-4 LED WW — A0240840

2 x 3 W warm-white LED, 2-way light direction

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Operating Power: constant current 350mA - 700mA

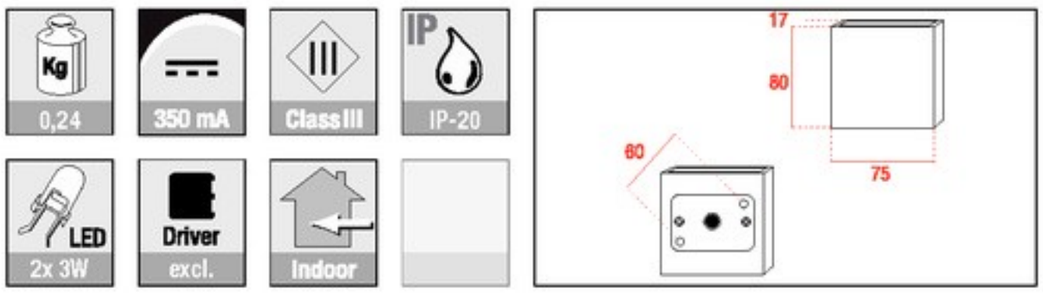




Detroit-5 LED WW — A0240850

1 x 1-3 W warm-white LED, 1-way light direction

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Operating Power: constant current 350mA - 700mA

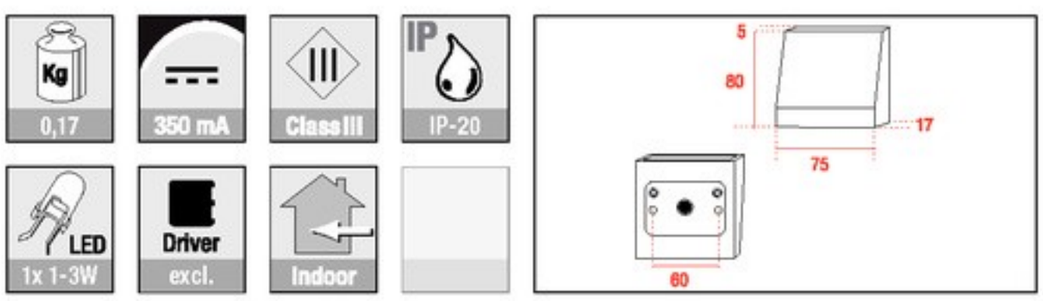


Wall lights

Pallisade

A0240111

Max. 1 x 40W g9-Halopin

- Housing: Aluminium silver-grey powder coated RAL 9006

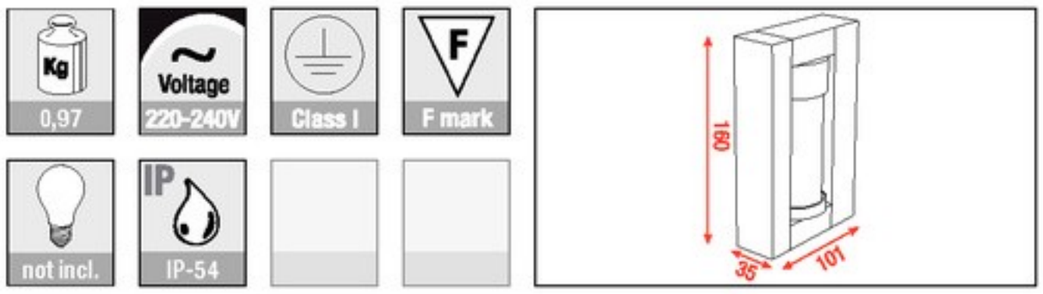



Dakota-2

A0245210

1 x 24W TC-L / 2G11

- Housing: Polished Aluminium
- Dimensions fixture: 85 x 42 x 500 mm

Lightbulb
24W Duluxe 930 3000K
24W Duluxe 940 4000K
24W Duluxe 954 5400K








Detroit-1 WW — A0240810

1W warm-white LED 15°

- Included built-in LED driver
- Aluminum housing
- Weight: 0,38 kg
- Dimensions: 60 x 100 x 50 mm
- IP classification: IP-54
- Power connection: 220-240V AC
- Power consumption: ±3,9W

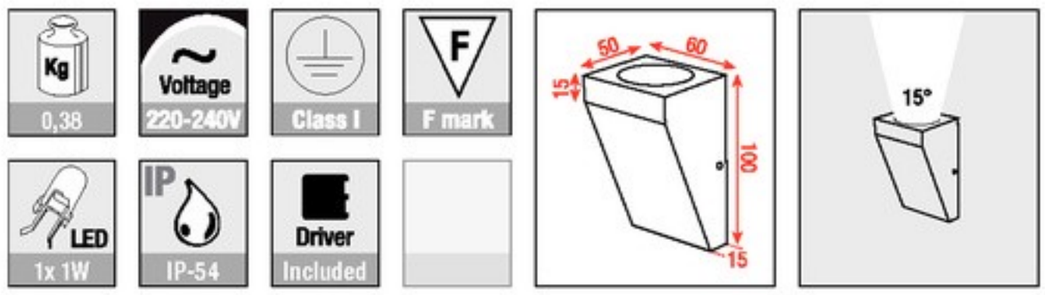




Detroit-2 WW — A0240820

2 x 1W warm-white LED 15°

- Included 2 x built-in LED driver
- Aluminum housing
- Weight: 0,72 kg
- Dimensions: 115 x 100 x 50 mm
- IP classification: IP-54
- Power connection: 220-240V AC
- Power consumption: ±7,8W

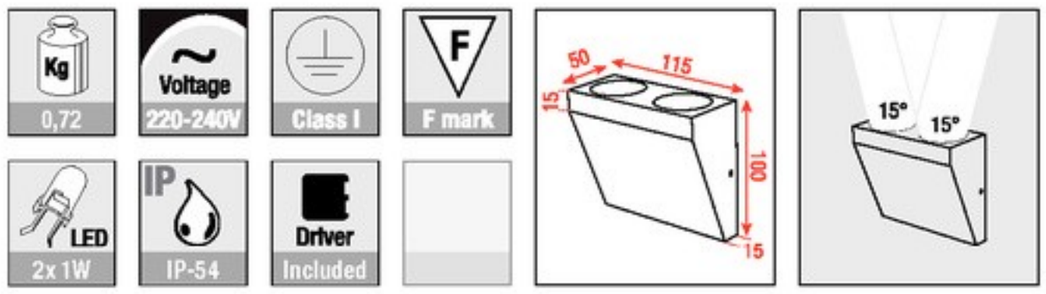




Detroit-3 — A0240830

3 x 1W warm-white LED


- Light direction: direct
- Built-in LED driver
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: 120 x 32 x 65 mm

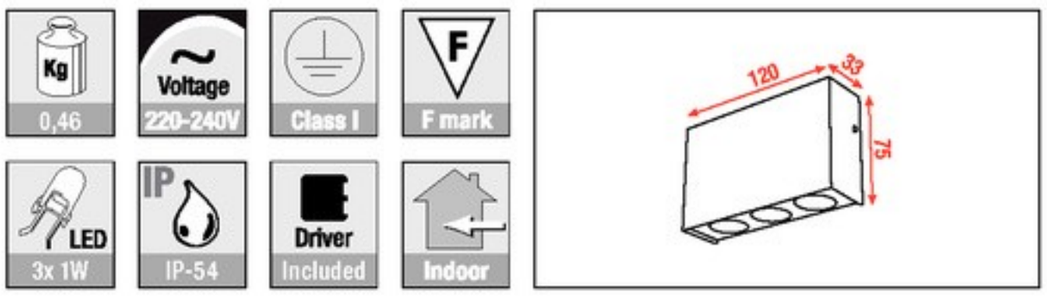

Wall lights

Visual by M.Bahnen, Highlite International B.V.

Wall lights

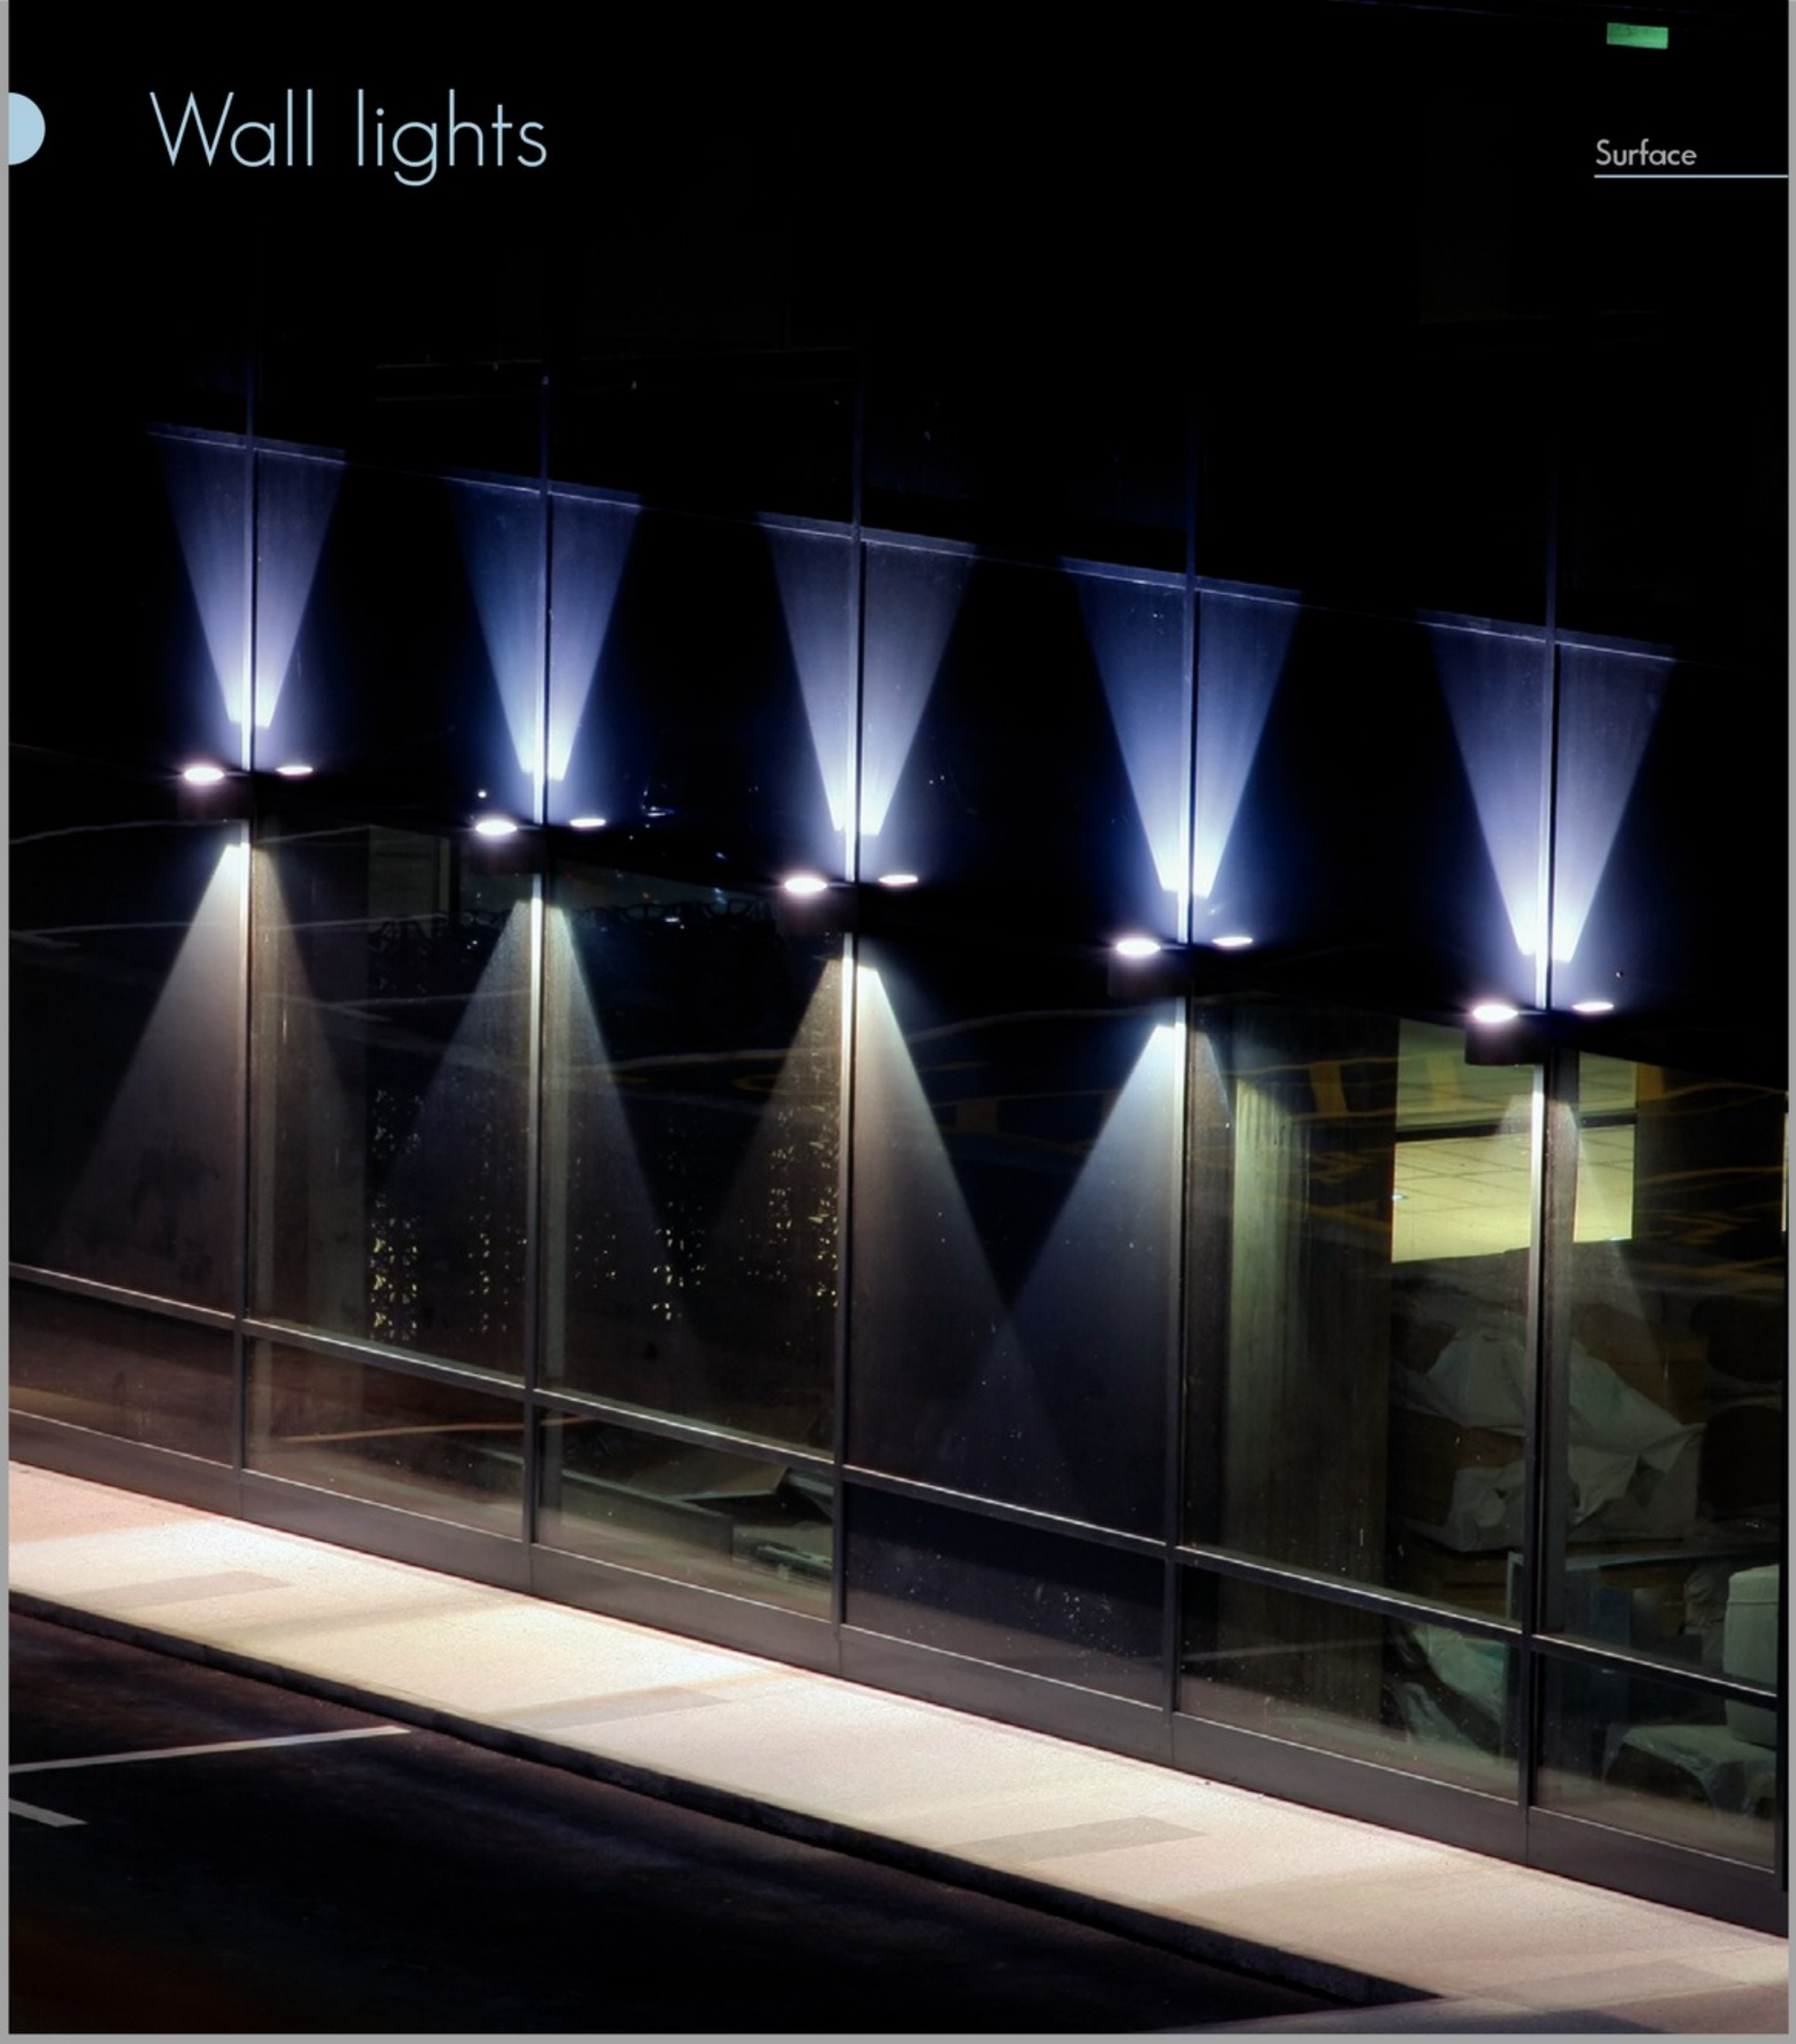


Wall lights

Florence-1 — A0240091

Max. 40W g9-Halopin

- Housing: Polished aluminium

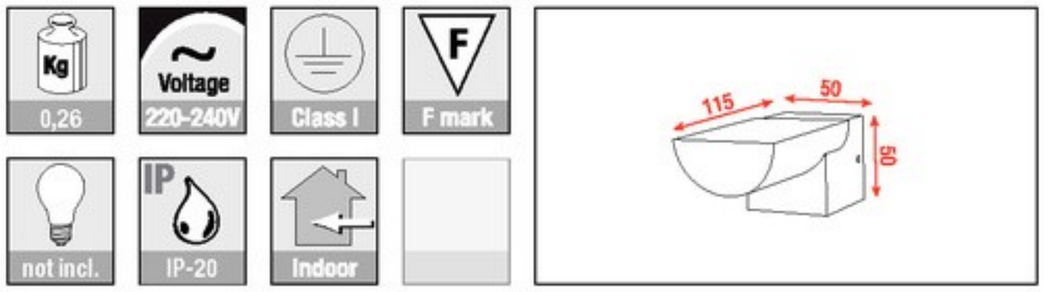




Florence-2 — A0240092

Max. 2 x 40W g9-Halopin

- Housing: Polished aluminium

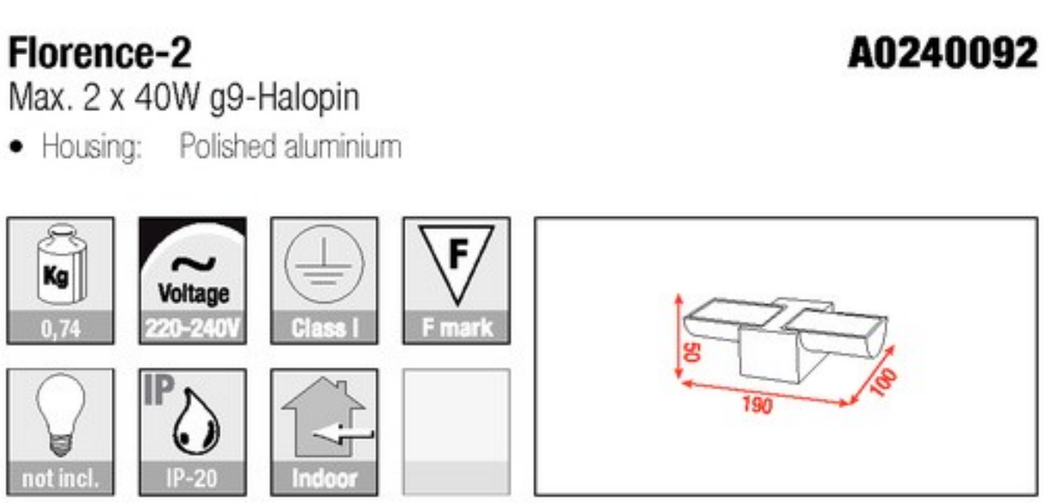




Rondo-1 — A0240141

Single, 1 x 40W up/down g9-Halopin

- Housing: Aluminium silver-grey powder coated RAL 9006

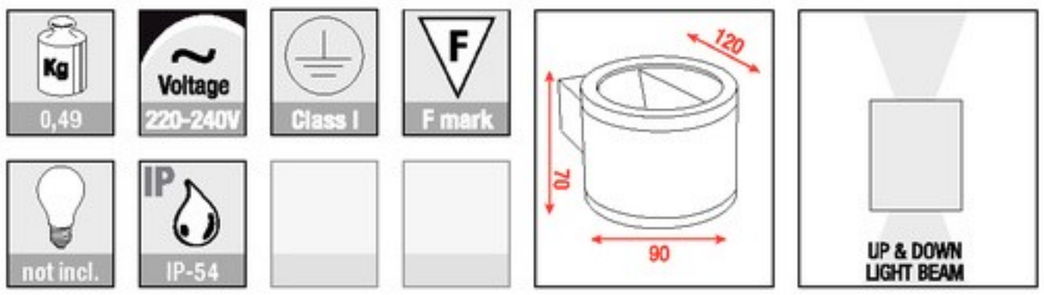




Rondo-2 — A0240142

Double, 2 x 40W up/down light g9-Halopin

- Housing: Aluminium silver-grey powder coated RAL 9006

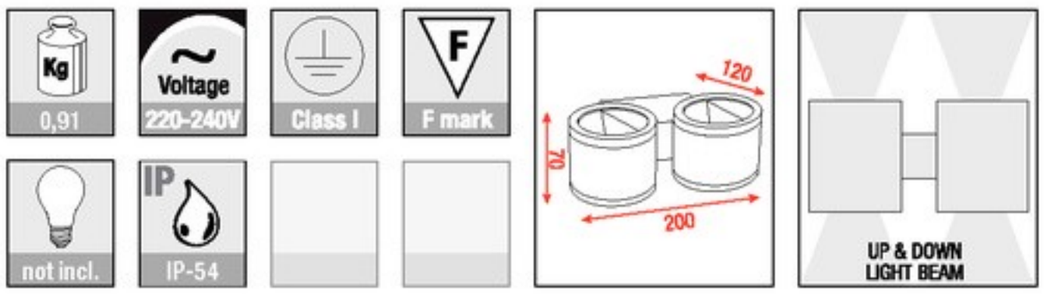



Wall lights




Visual by M. Behmen, Hafelite International B.V.

Wall lights

Chicago-1 WW — A0240710

1W warm-white LED 15°

- Included built-in LED driver
- Aluminum housing
- Weight: 0,2 kg
- Dimensions: 46 x 66 x 75 mm
- IP classification: IP-20
- Power connection: 220-240V AC
- Power consumption: ±1,3W

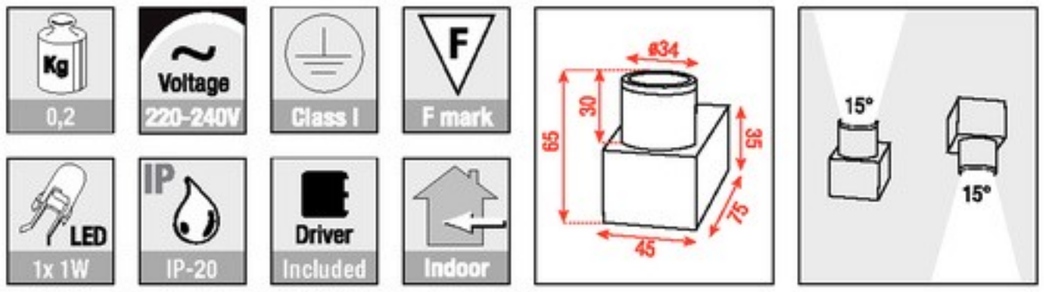





Chicago-2 WW — A0240720

2 x 1W warm-white LED 15°

- Included built-in LED driver
- Aluminum housing
- Weight: 0,52 kg
- Dimensions: 211 x 71 x 77 mm
- IP classification: IP-20
- Power connection: 220-240V AC
- Power consumption: ±2,6W

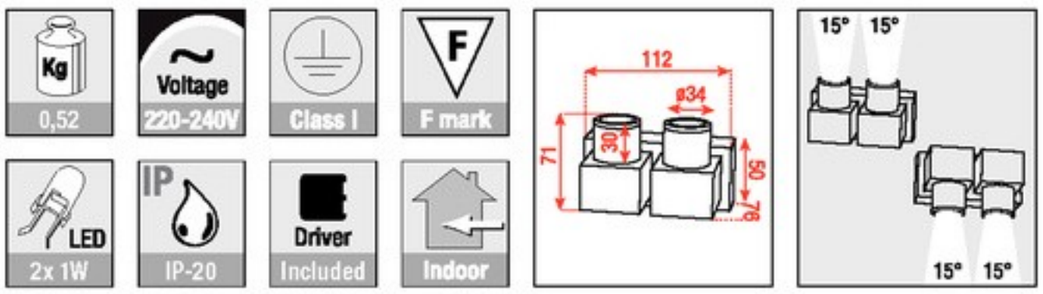


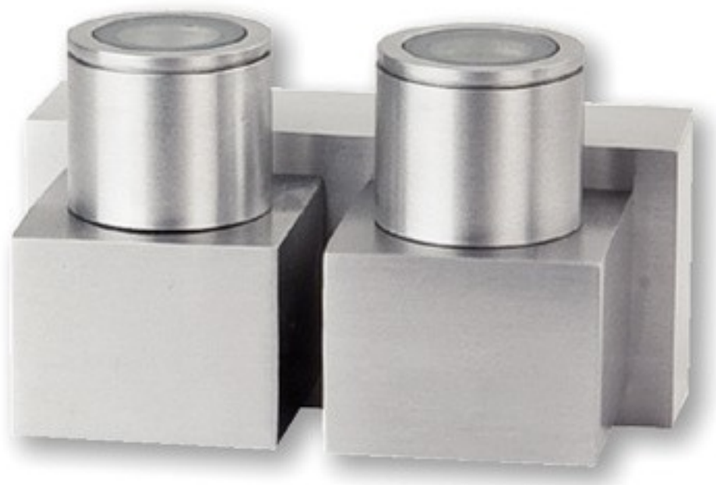

Chicago-2A WW — A0240730

2 x 1W warm-white LED 15°

- Included built-in LED driver
- Aluminum housing
- Weight: 0,26 kg
- Dimensions: 45 x 75 x 100 mm
- IP classification: IP-20
- Power connection: 220-240V AC
- Power consumption: ±2,6W

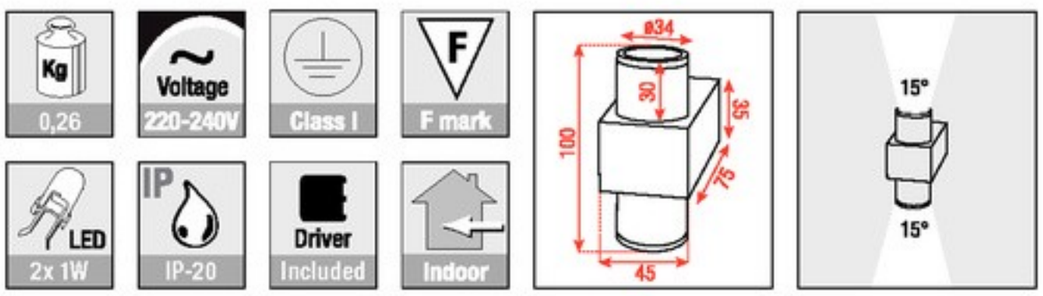






Cannes-1 **A0240101**

Max. 35W MR-16 gu-10

- Housing: Aluminium silver-grey powder coated RAL 9006

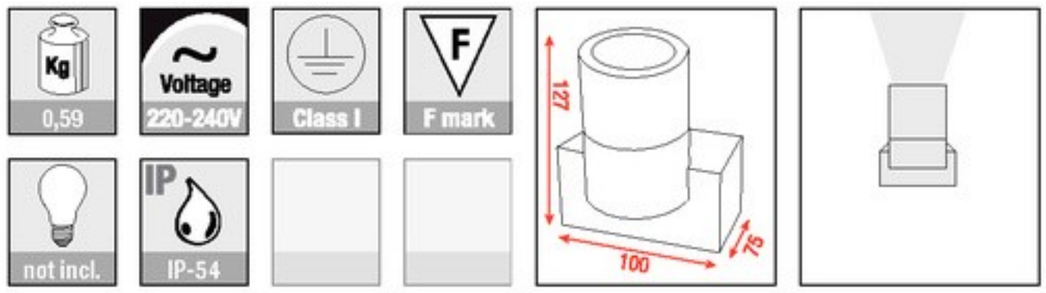




Cannes-2 **A0240102**

Max. 2 x 35W up/down light MR-16 gu-10

- Housing: Aluminium silver-grey powder coated RAL 9006

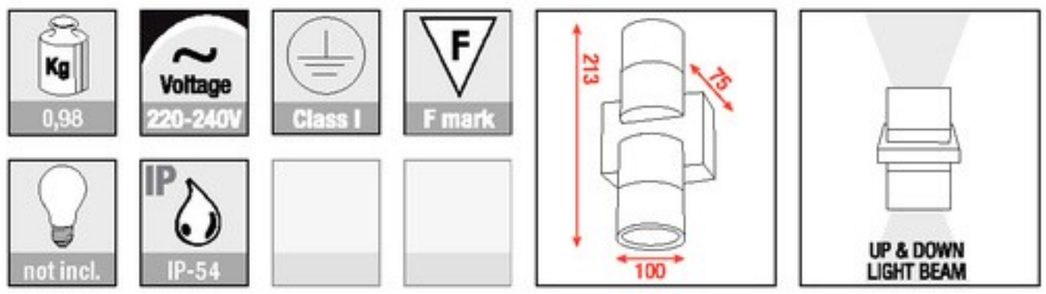


Wall lights

Valencia-S

A0240120

2 x 1W warm-white LED

- Housing: Polished Aluminium
- Transparent powder coating

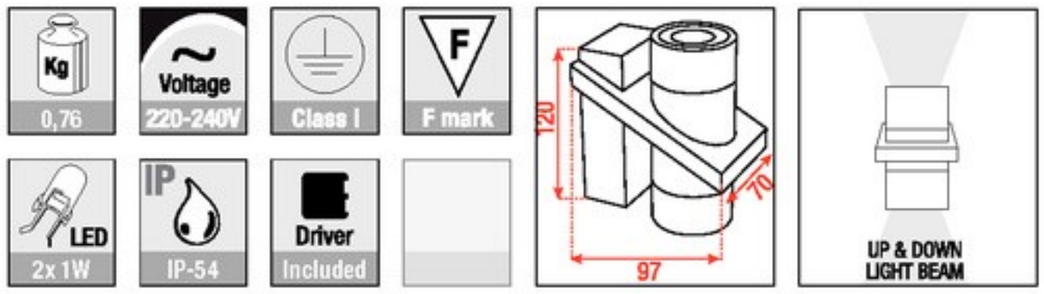




Valencia-M

A0240121

Max. 2 x 50W up/down light MR-16 gu-10

- Housing: Aluminium silver-grey powder coated RAL 9006

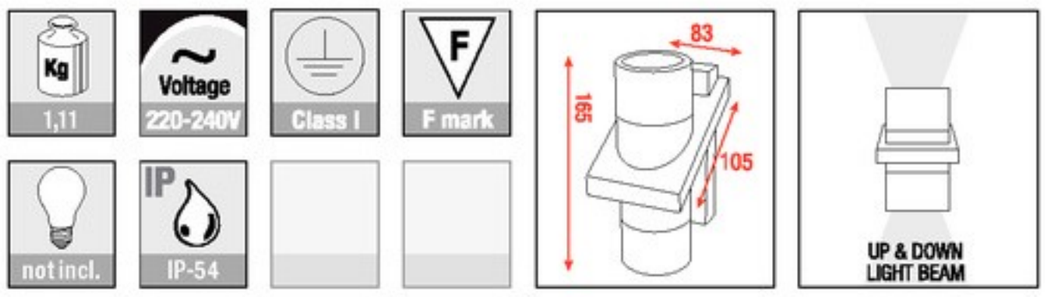




Valencia-L

A0240122

Max. 2 x 50W up/down light MR-16 gu-10

- Housing: Aluminium silver-grey powder coated RAL 9006

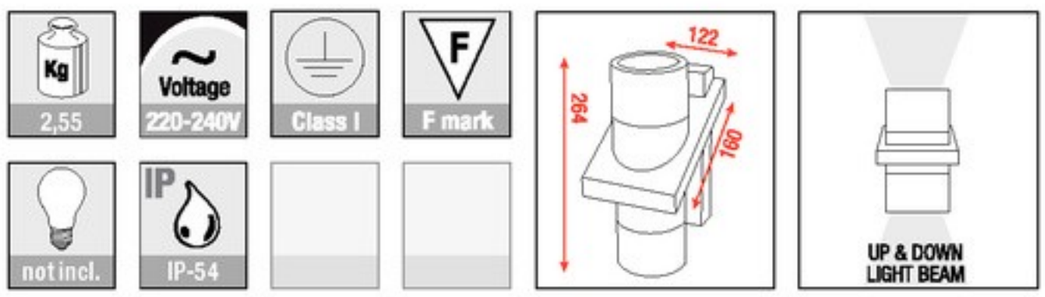




Valencia-XL

A0240125

2x max. 50W (QR-111) Halospot 111 IRC up/down wall-light

- Housing: Aluminium
- Transparent powder coating

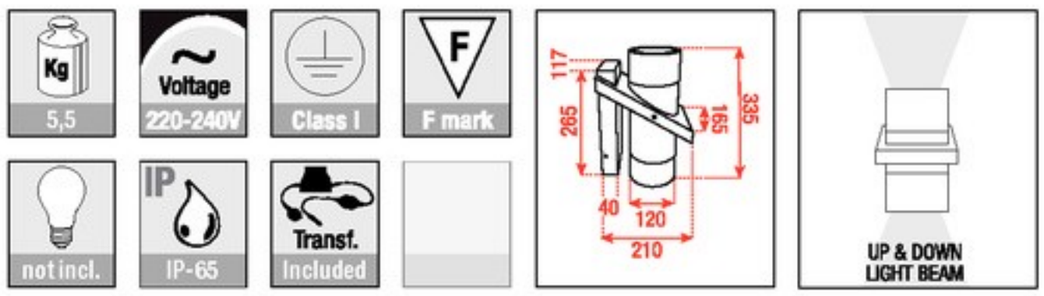




Dover-M

A0240241

1 x Osram Dulux D 13W G-24d-1

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel

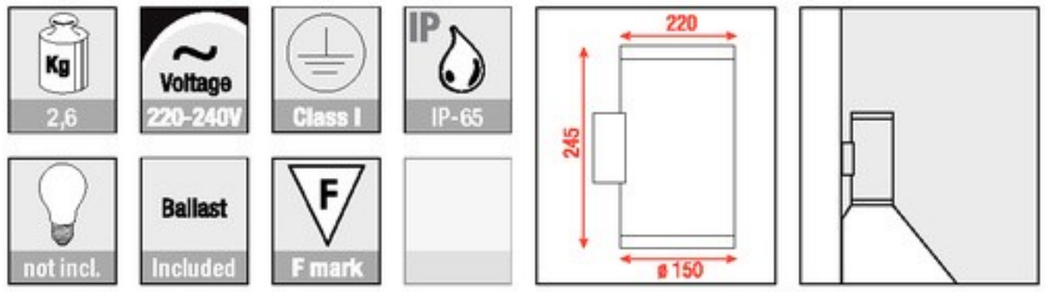




Dover-L

A0240242

1 x Osram Dulux D 18W G-24d-2

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel

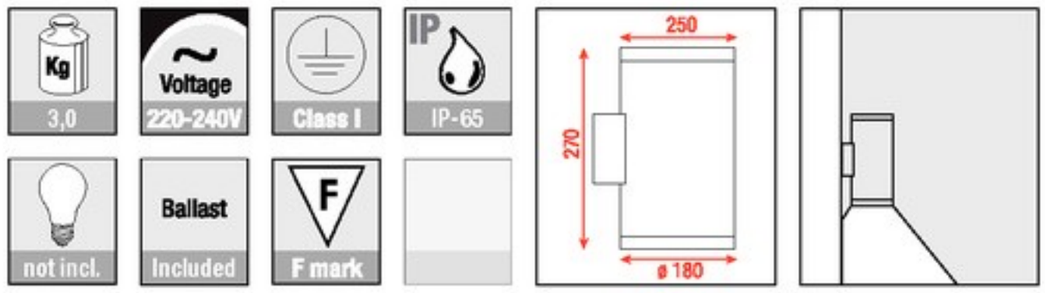




Dover-XL

A0240243

1 x Osram Dulux D 26W G-24d-3

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel

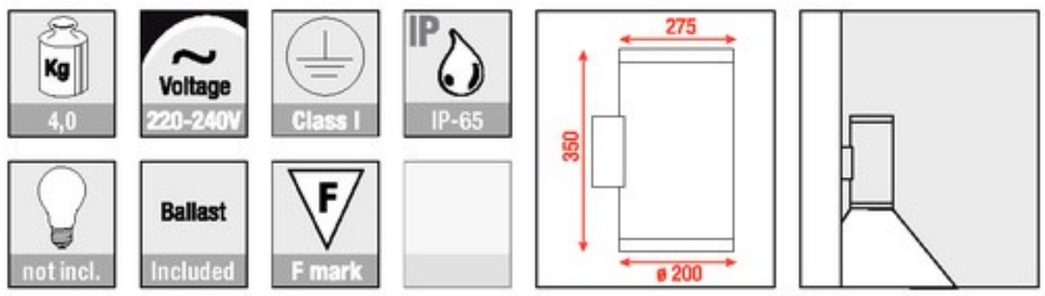


Wall lights

Calais-M — A0240251

2 x Dulux D 13W G-24d-1, up/down light

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel

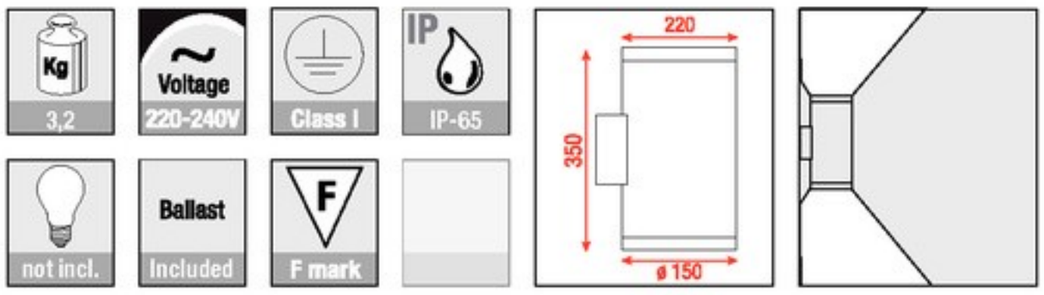




Calais-L — A0240252

2 x Dulux D 18W G-24d-2, up/down light

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel

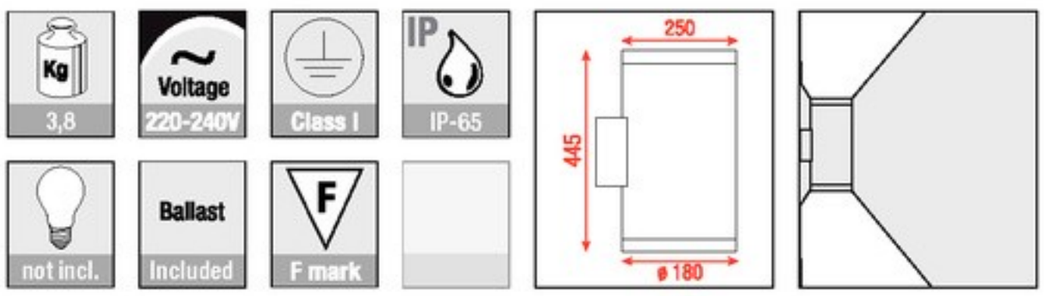




Calais-XL — A0240253

2 x Dulux D 26W G-24d-3, up/down light

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel

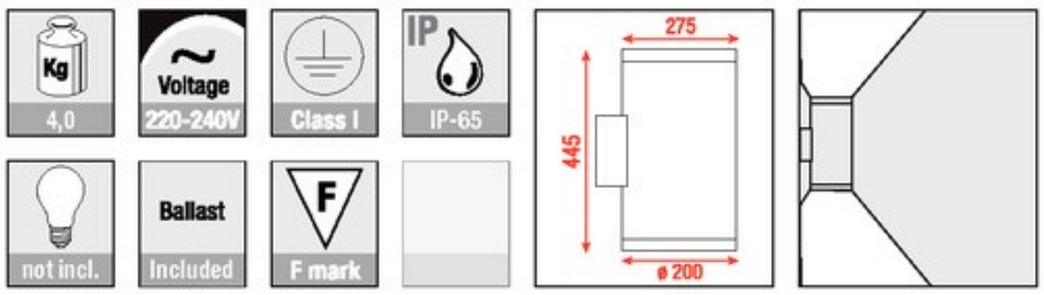




Wall lights




Bergen-1 A0240151

Single, 1 x max. 40W g9-Halopin

- Housing: Aluminium silver-grey powder coated RAL 9006

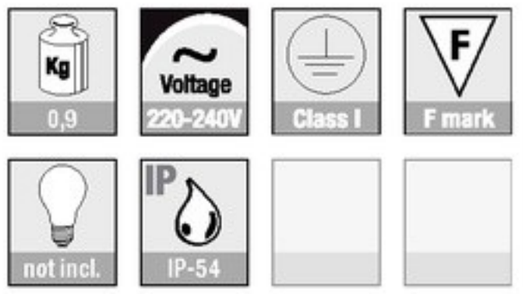

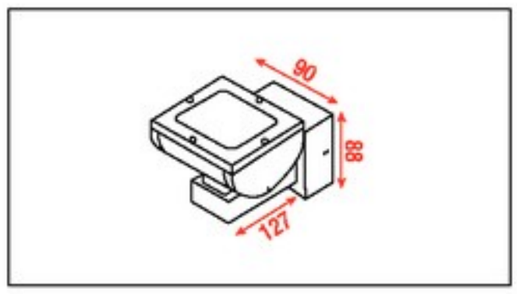





Bergen-2 A0240152

Double, 2 x max. 40W g9-Halopin

- Housing: Aluminium silver-grey powder coated RAL 9006

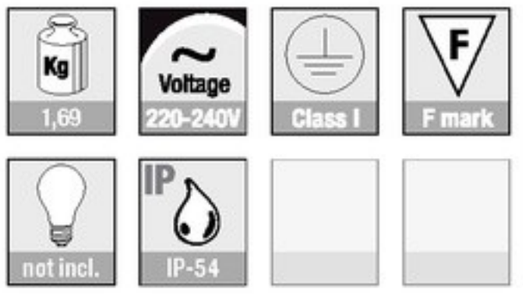

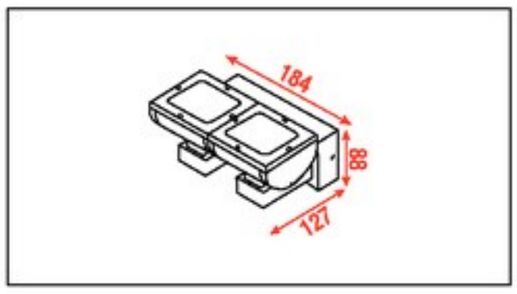





Alesund-1 A0240171

Single, 1 x max. 40W g9-Halopin

- Housing: Aluminium silver-grey powder coated RAL 9006

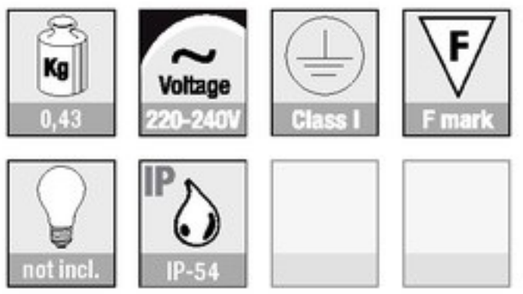

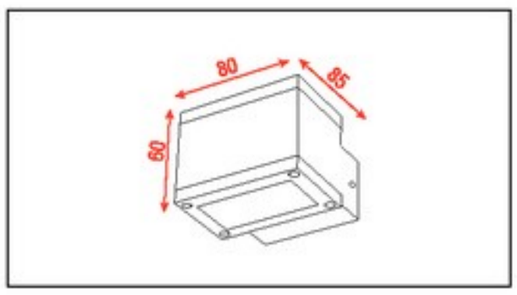





Alesund-2 A0240172

Double, 2 x max. 40W g9-Halopin

- Housing: Aluminium silver-grey powder coated RAL 9006

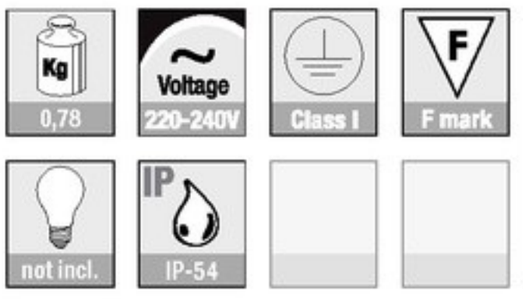

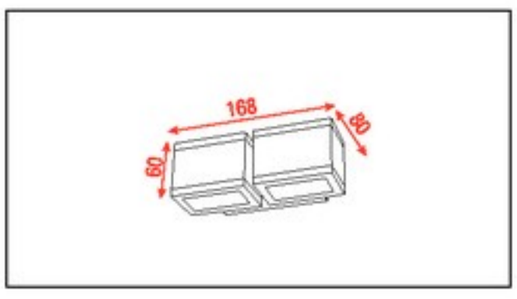

Wall lights




Alabama-1 WW

A0240610

1 x 3W warm-white LED 15°

- Included built-in LED driver
- Aluminum housing
- Weight: 0,56 kg
- Dimensions: 80 x 93 x 70 mm
- IP classification: IP-54 Class-1
- Power connection: 220-240V AC
- Power consumption: ±1,3W

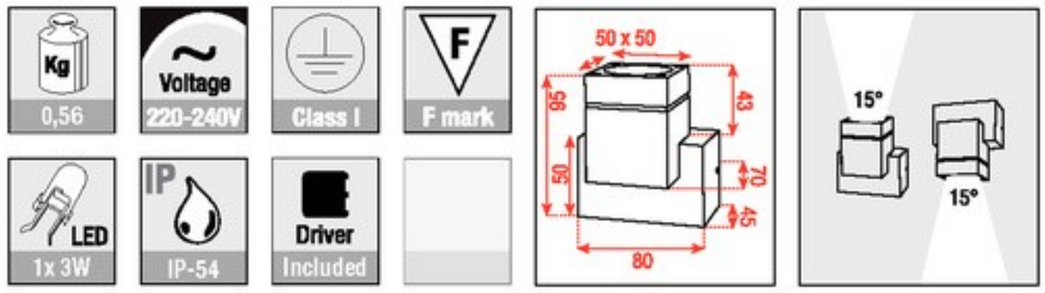




Alabama-2 WW

A0240620

2 x 3W warm-white LED 15°

- Included 2 x built-in LED driver
- Aluminum housing
- Weight: 1 kg
- Dimensions: 155 x 95 x 70 mm
- IP classification: IP-54 Class-1
- Power connection: 220-240V AC
- Power consumption: ±2,6W

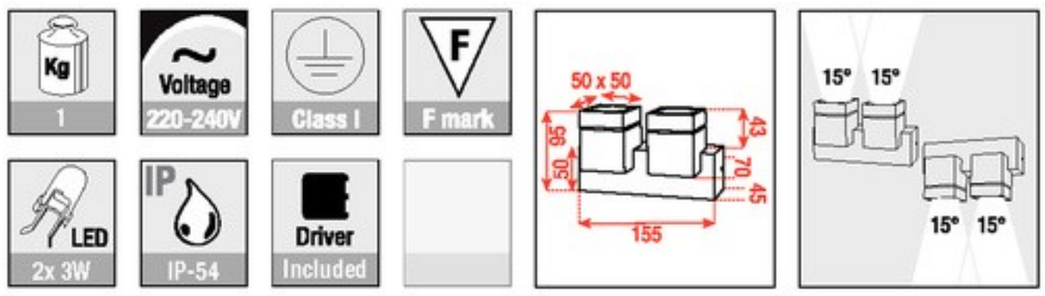




Alabama-2A WW

A0240630

2 x 1W warm-white LED 15°

- Included built-in LED driver
- Aluminum housing
- Weight: 0,76 kg
- Dimensions: 75 x 130 x 85 mm
- IP classification: IP-54 Class-1
- Power connection: 220-240V AC
- Power consumption: ±2,6W

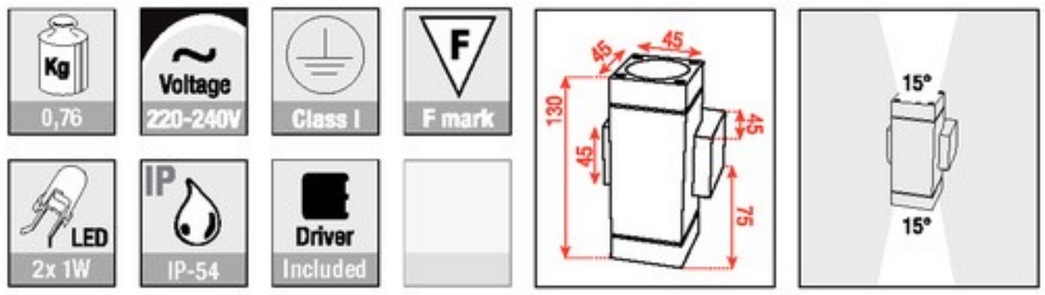


Wall lights

Cleveland-4WW


A0240910

4 x1W warm white LED

- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 4x 1 watt warm white LED
- Colour temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 5 Watt
- Dimensions: 70x70x127mm

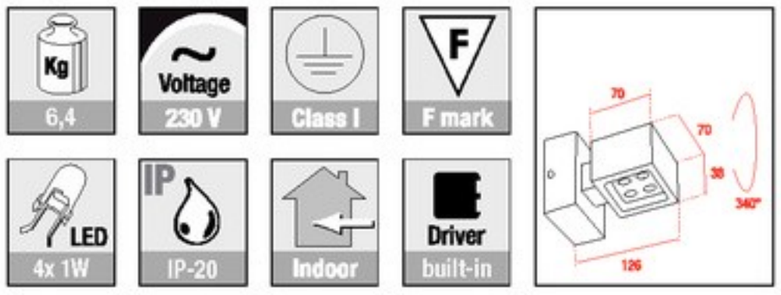



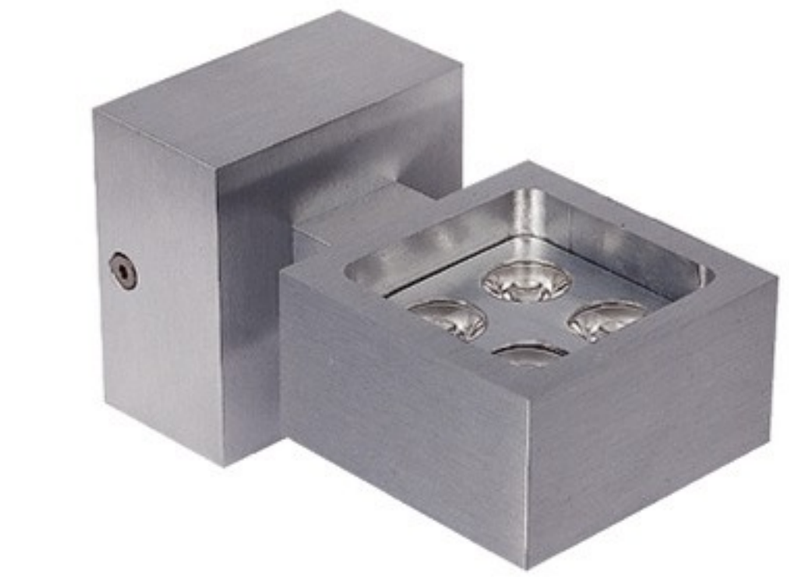



Cleveland-8WW

A0240920

8 x1W warm white LED


- Housing: Polished aluminium
- Finish: Transparant powder coating
- Diffuser: Lens
- Light source: 8x 1 watt warm white LED
- Colour temperature: warm white
- Beam Angle: 15°
- Lumen output: n.a.
- Power connection: 110-240 Vac
- Power consumption: 9 Watt
- Dimensions: 130x127x70mm

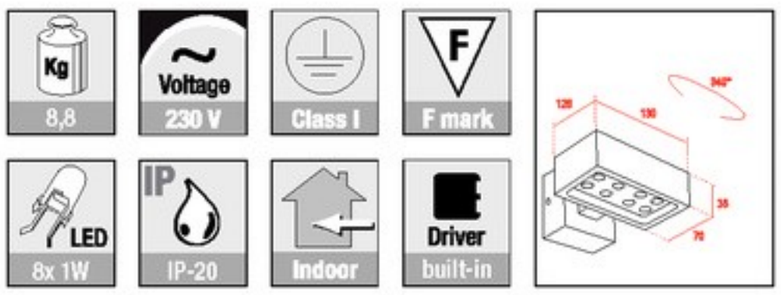





Wall lights

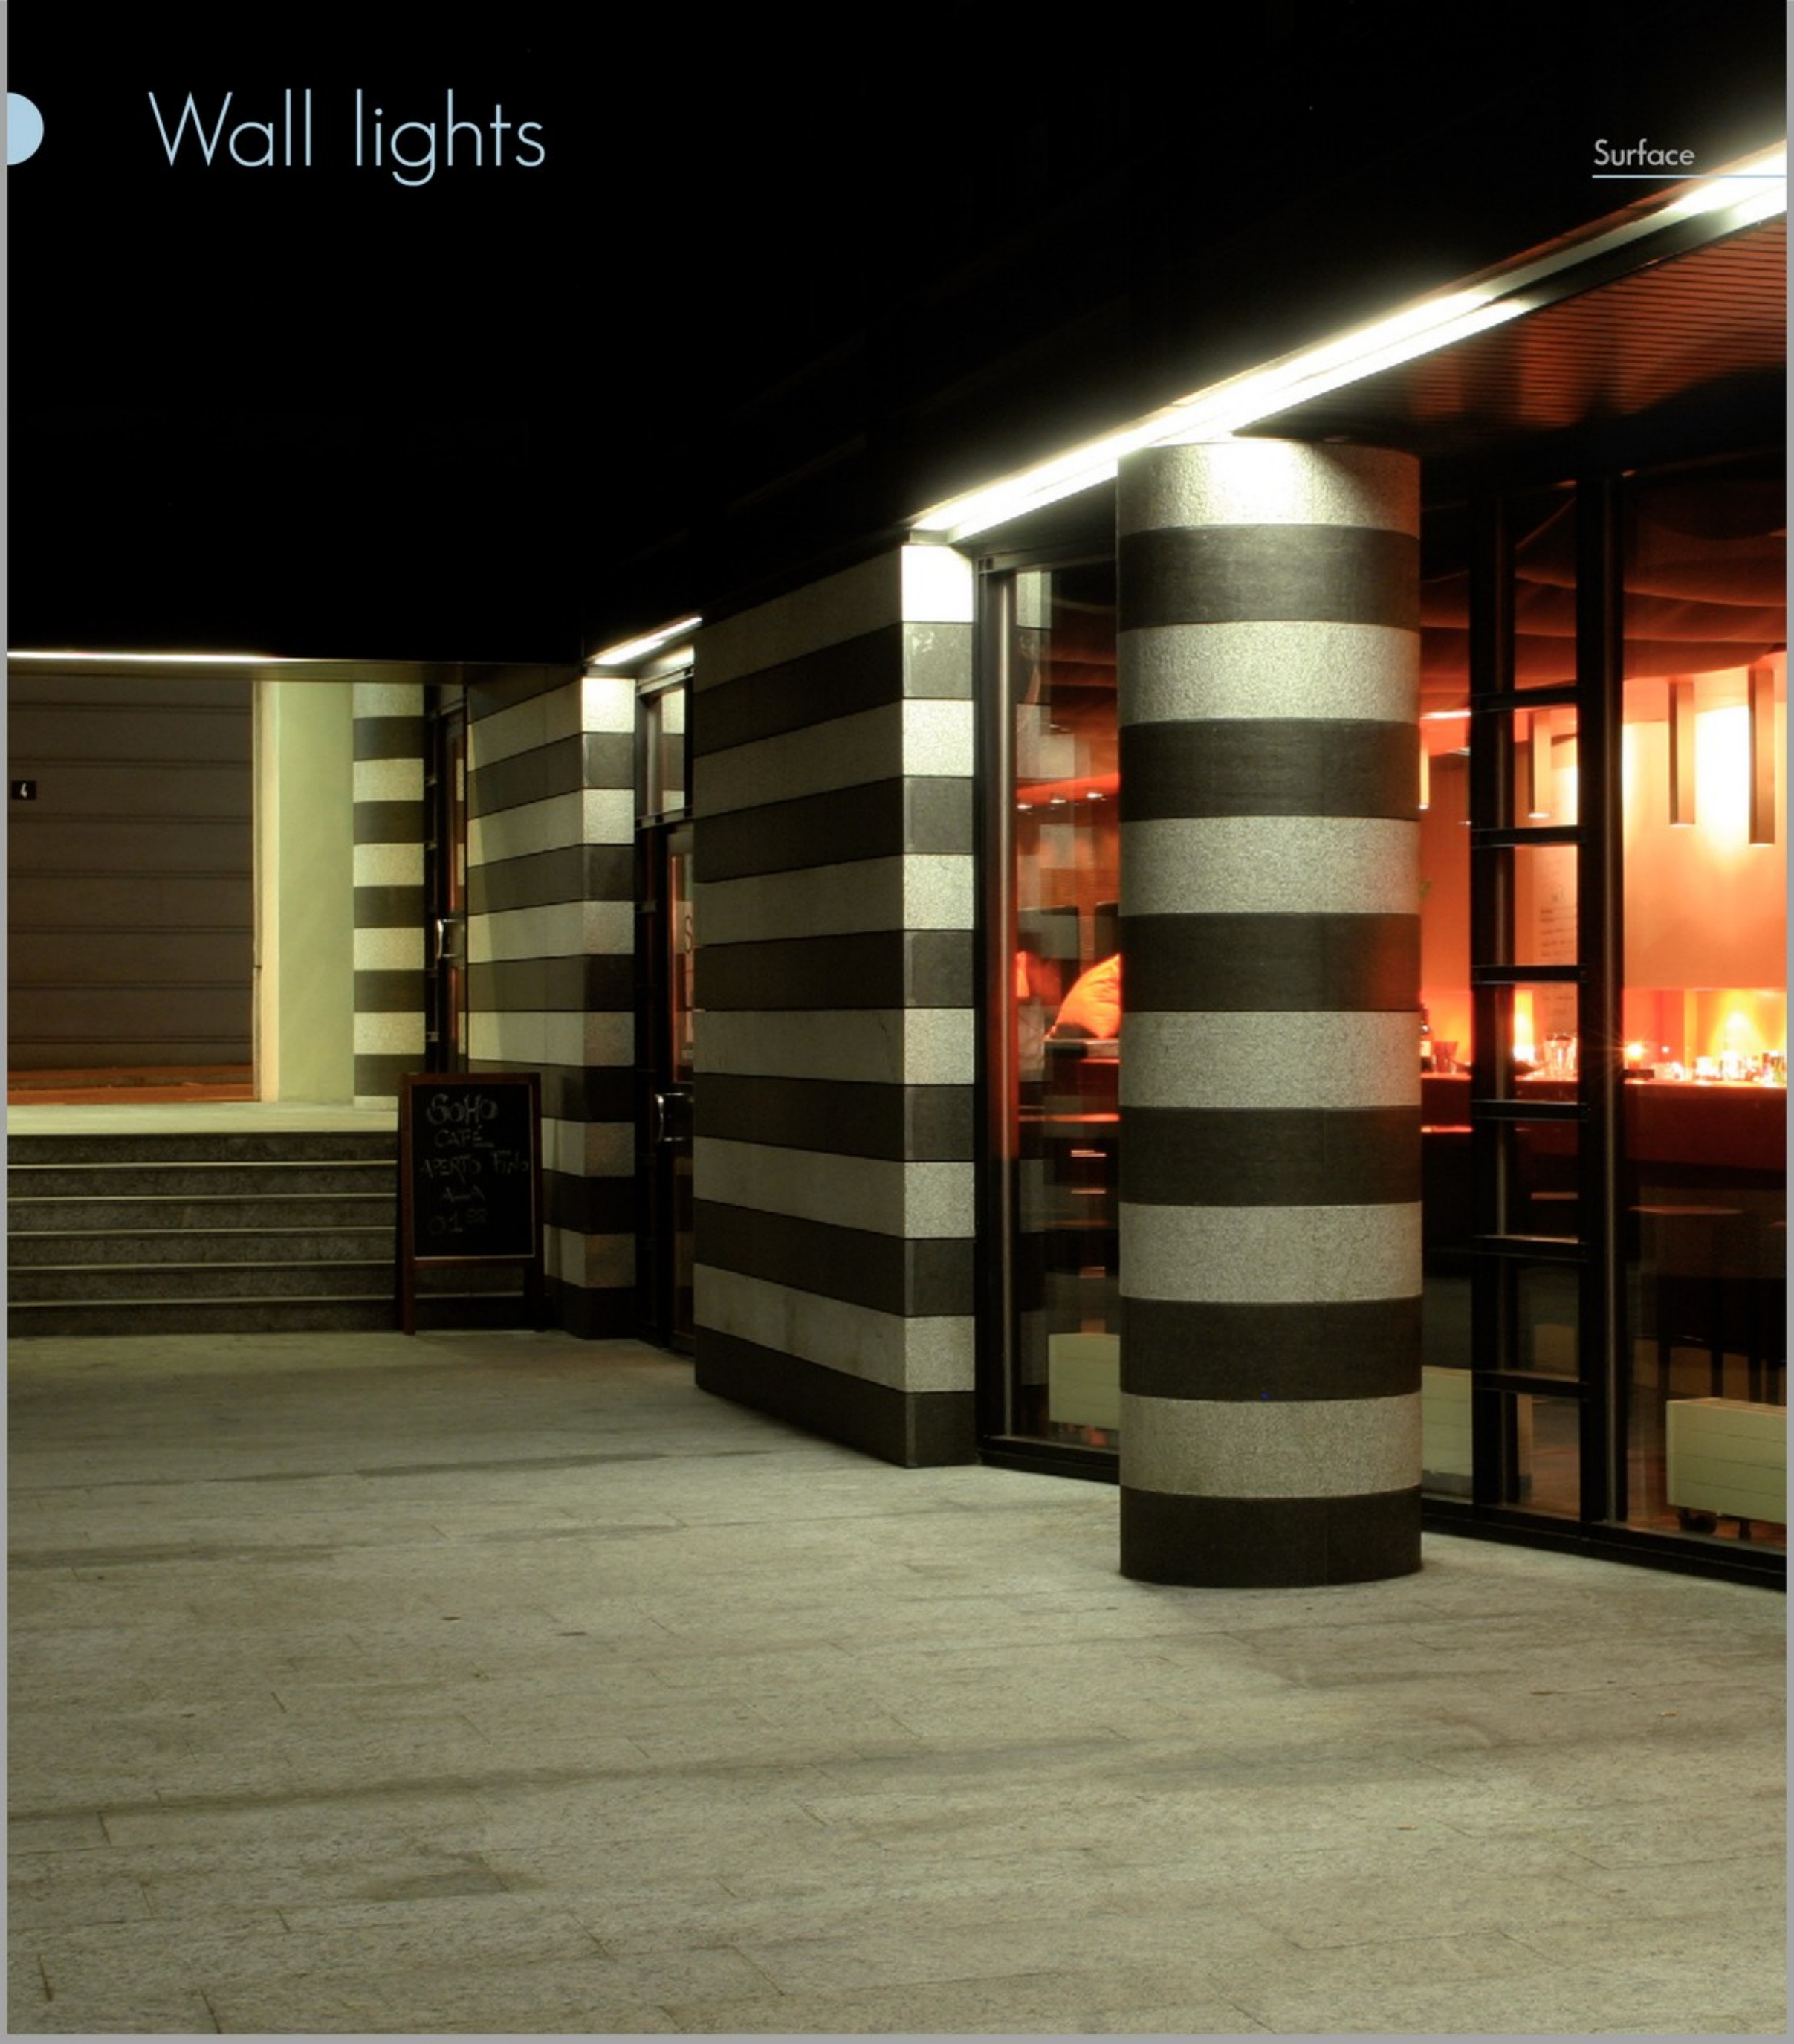

Wall lights










Dublin-S


A0240314

Lumilux 14W T16 g5

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel
- Incl.: Ballast
- Excl.: Gear & Bulb










Dublin-M


A0240321

Lumilux 21W T16 g5

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel
- Incl.: Ballast
- Excl.: Gear & Bulb










Dublin-L


A0240328

Lumilux 28W T16 g5

- Housing: Die cast aluminium
- Reflector: Pure anodised aluminium
- Diffuser: 5 mm tempered glass
- Gasket: Silicone rubber
- Finish: Polyester powder paint
- Screws: Stainless steel
- Incl.: Ballast
- Excl.: Gear & Bulb







Wall lights



Glasgow-9WW — A0240400
9x1W warm white LED

- Housing: Extruded aluminium
- Finish: Silver powder coated
- Diffuser: 4mm tempered glass
- Light source: 9x1 watt warm white LED
- Color temperature: warm white
- Beam Angle: 30°
- Cable gland: PG-11
- Power connection: 220-240 Vac
- Power consumption: 10,8 Watt
- Dimensions: 349 x 80 x 60 mm

Glasgow-9CW — A0240401
9x1W cool white LED

- Housing: Extruded aluminium
- Finish: Silver powder coated
- Diffuser: 4mm tempered glass
- Light source: 9x1 watt warm white LED
- Color temperature: warm white
- Beam Angle: 30°
- Cable gland: PG-11
- Power connection: 220-240 Vac
- Power consumption: 10,8 Watt
- Dimensions: 349 x 80 x 60 mm
















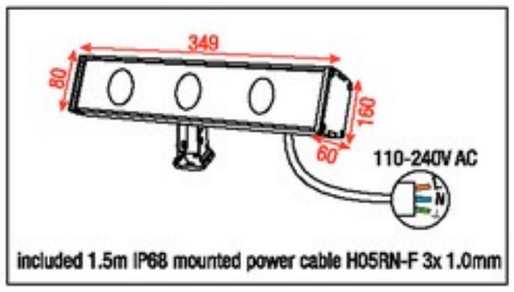

included 1.5m IP68 mounted power cable H05RN-F 3x 1.0mm

Glasgow-27WW — A0240410
9x3W warm white LED

Glasgow-27CW — A0240411
9x3W cool white cob LED

- Housing: Extruded aluminium
- Finish: Silver powder coated
- Diffuser: 4mm tempered glass
- Light source: 9x3 watt warm white LED
- Color temperature: warm white
- Beam Angle: 30°
- Cable gland: PG-11
- Power connection: 220-240 Vac
- Power consumption: 24,1 Watt
- Dimensions: 349 x 80 x 60 mm

















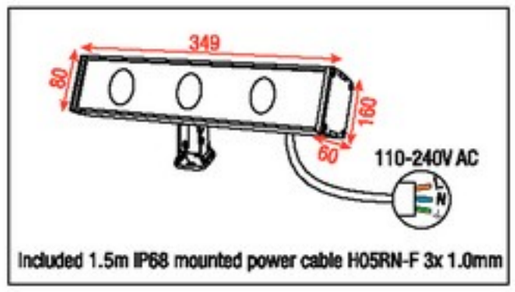

Included 1.5m IP68 mounted power cable H05RN-F 3x 1.0mm

Wall lights



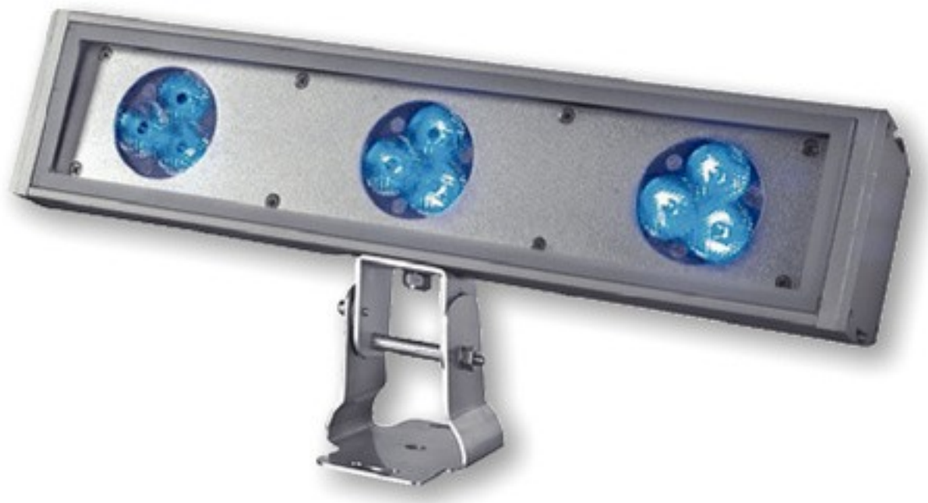



Glasgow-6RGB — A0240445

18x3W RGB in-one LED

- Housing: Extruded aluminium
- Finish: Silver powder coated
- Diffuser: 4mm tempered glass
- Light source: 18x3 watt RGB in-one LED
- Color temperature: RGB
- Beam Angle: 30°
- Cable gland: PG-11
- Power connection: 24 Vdc
- Power consumption: 52 Watt
- Dimensions: 676 x 80 x 60 mm

A9915001 controller: not incl.

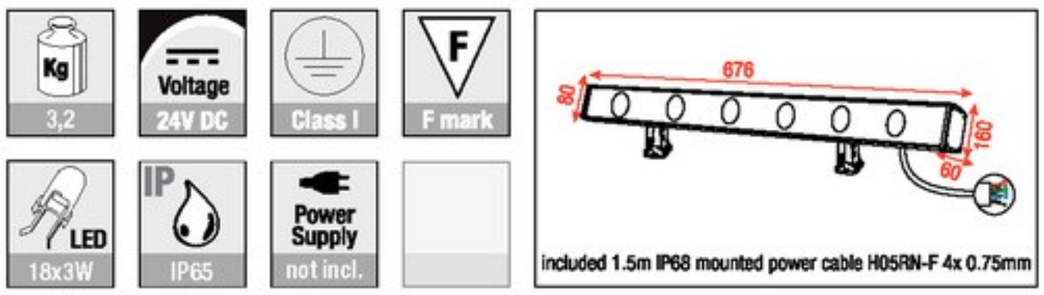

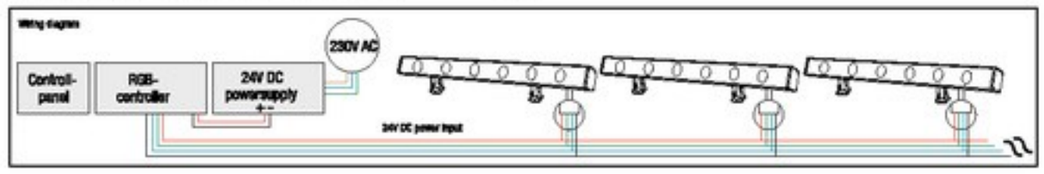


Glasgow-3RGB — A0240440


9x3W RGB in-one LED

- Lens beam angle: 30°
- Input Voltage: 24VDC
- Operating current: 1143mA
- Power consumption: 27.4W
- Housing: Extruded aluminum, silver powdercoated
- Bracket: Powder coated steel, T = 2.0mm
- Glass: Tempered glass, T = 4.0mm
- Lens: All-in-one optical lens, efficiency >85%
- Cable gland: IP68 PG-11 copper & nickel coated
- Waterproof seal: Glass and Housing are silicone sealed
- PCB: Excellent heat conductive aluminum coefficient of heat conductivity >2.0w/mk
- 24V connection: 1.5m IP68 mounted power cable H05RN-F 4x 0.75mm²

A9915001 controller: not incl.



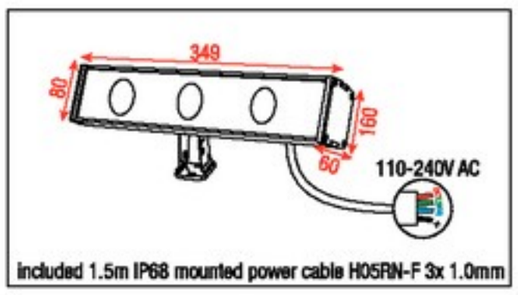

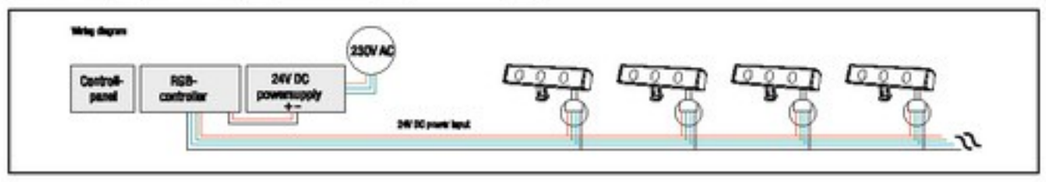


Wall lights



Yosemite-Wall — A0245101

Dulux D 18W G-24D-2

- Housing: Aluminium
- Silver grey coated: RAL-9006
- Input Voltage: 230V AC
- Dimensions Ø: 150 mm

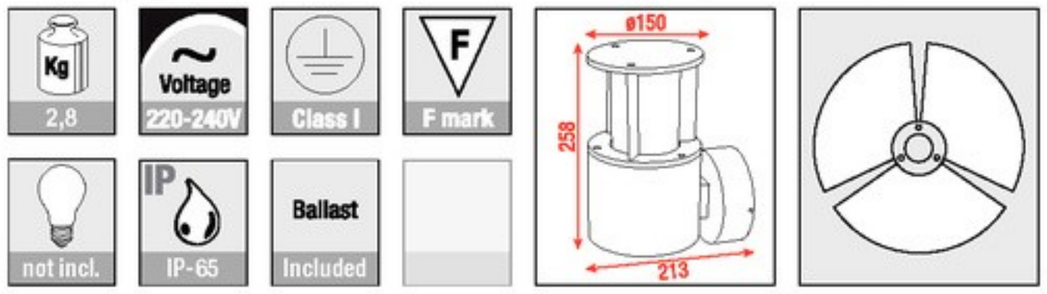


Other models available on page 161



Richmond-Wall — A0245102

Dulux D 18W G-24D-2

- Housing: Aluminium
- Silver grey coated: RAL-9006
- Input Voltage: 230V AC

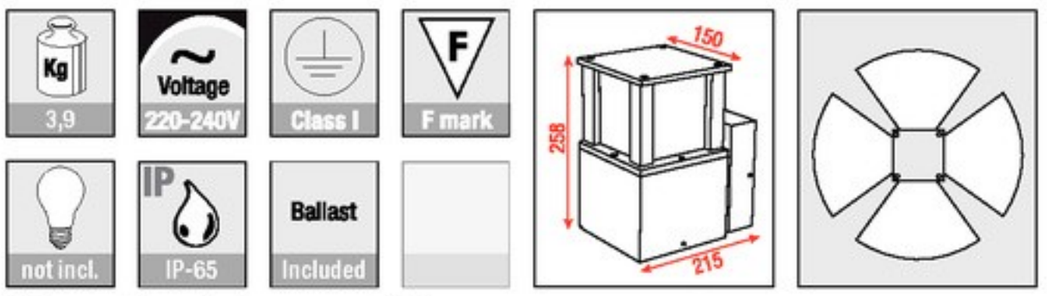


Other models available on page 162



Greenway-Wall — A0245103

Dulux EL max. 18W E-27

- Housing: Aluminium
- Silver grey coated: RAL-9006
- Input Voltage: 230V AC
- Dimensions Ø: 80 mm

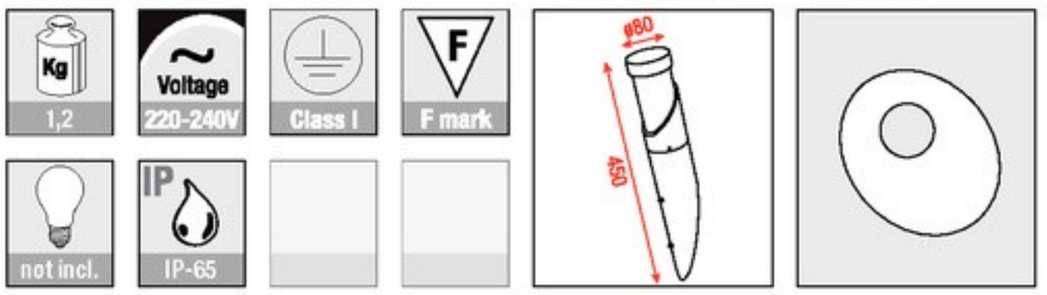

Other models available on page 165




Daytona-wall — A0245140

1 x 3W warm-white LED

LED TECHNOLOGY

- Light direction: indirect
- Built-in LED driver
- Power consumption: 3,3W
- Housing: Polished Aluminium
- Dimensions fixture: 128x128xø138mm

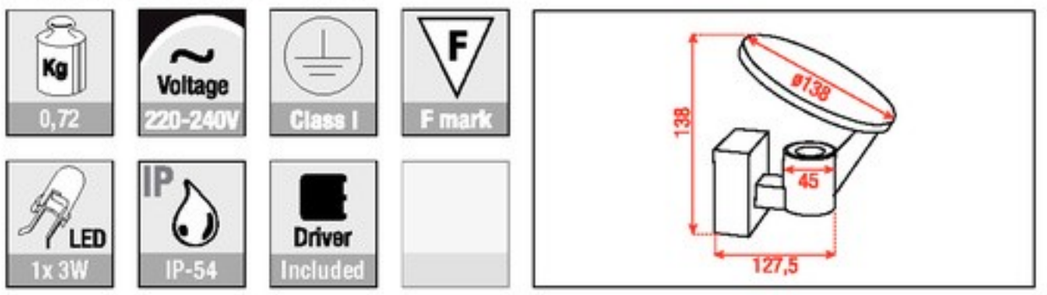



Other models available on page 166


Wall lights

Visual by M.Bahnen, Highlite International B.V.

Track-lights

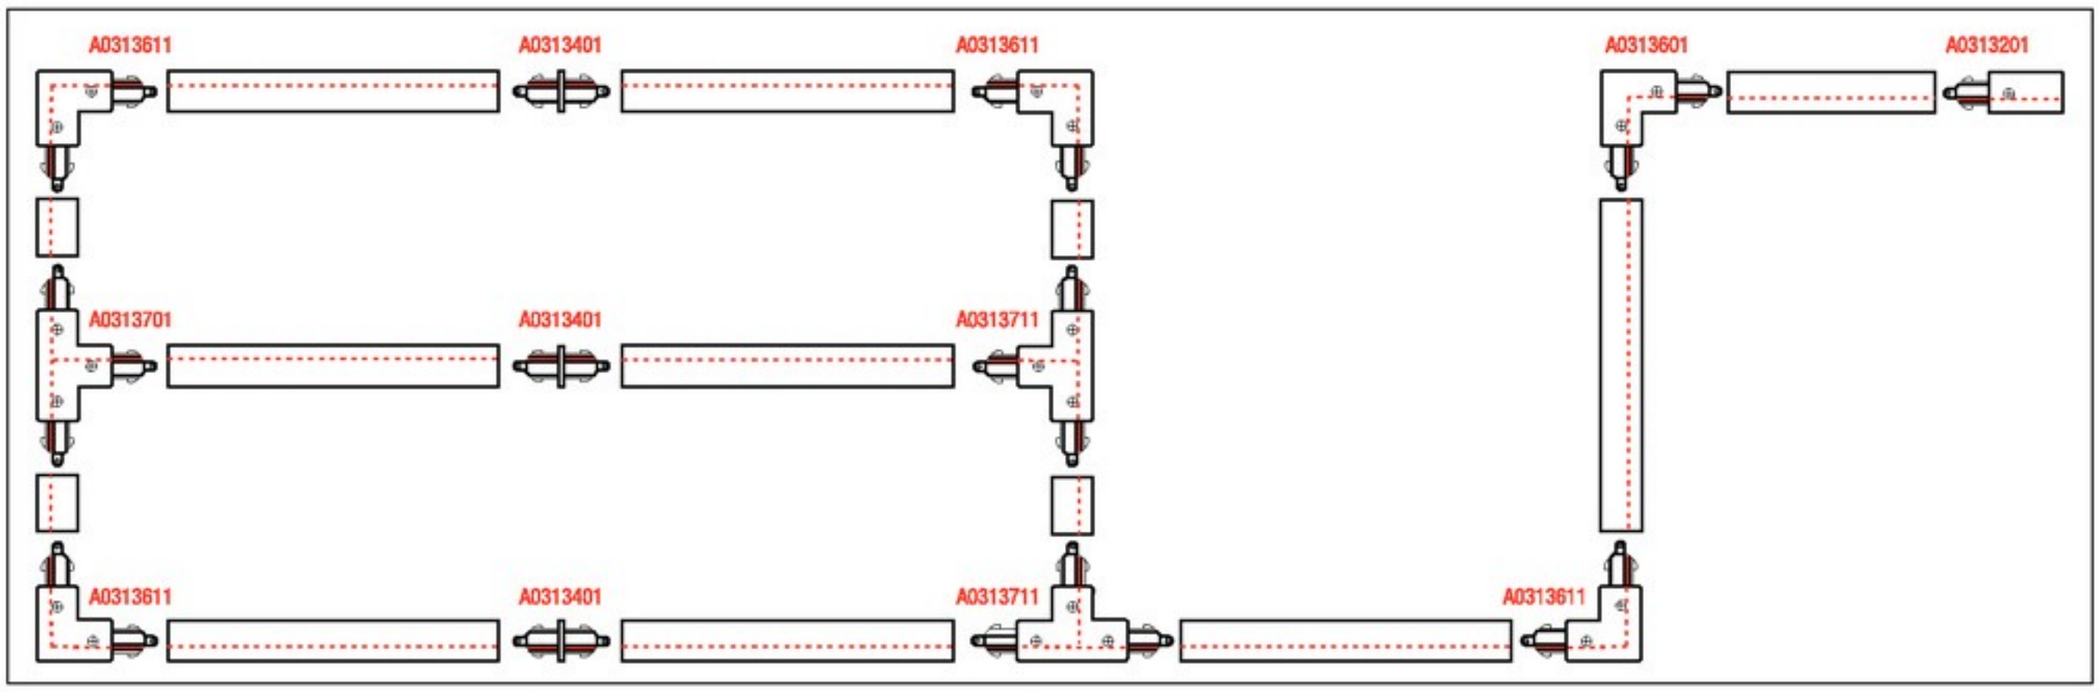

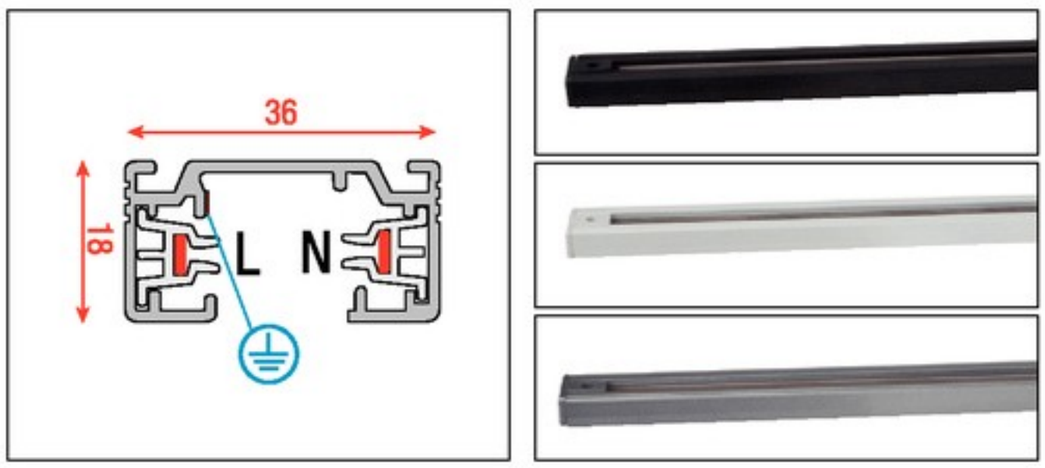


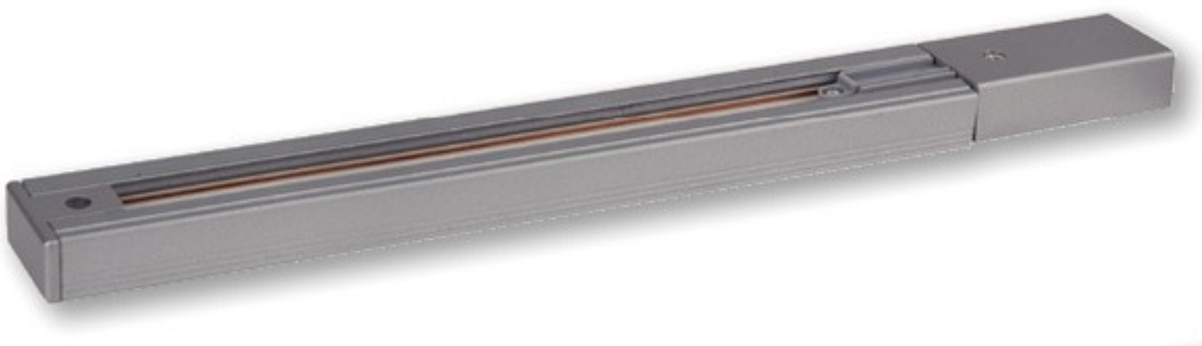

1-Phase 1000 mm Track, 250V 16A

- Including: Connection Adapter and Endcap


A0311001 Black - (RAL9004)
A0311002 White - (RAL9003)
A0311003 Silver - (RAL9006)

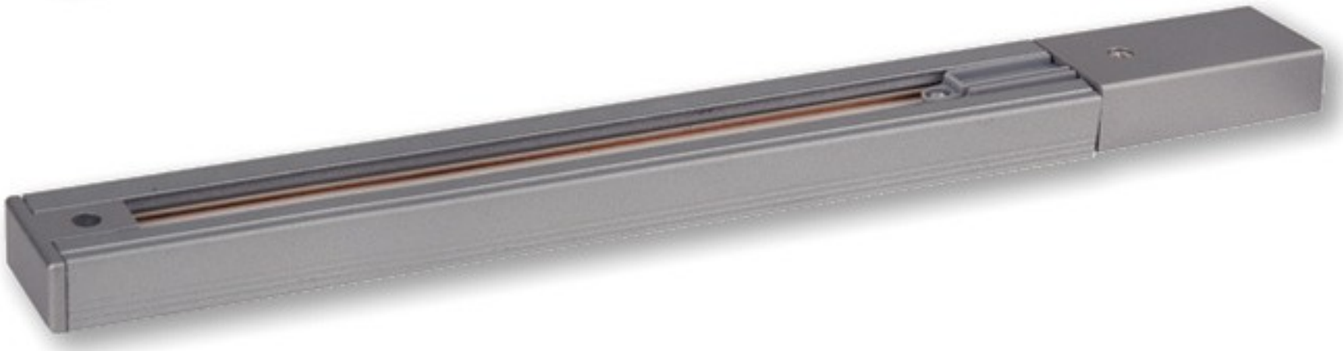

1-Phase 1500 mm Track, 250V 16A

- Including: Connection Adapter and Endcap

A0311501 Black - (RAL9004)
A0311502 White - (RAL9003)
A0311503 Silver - (RAL9006)

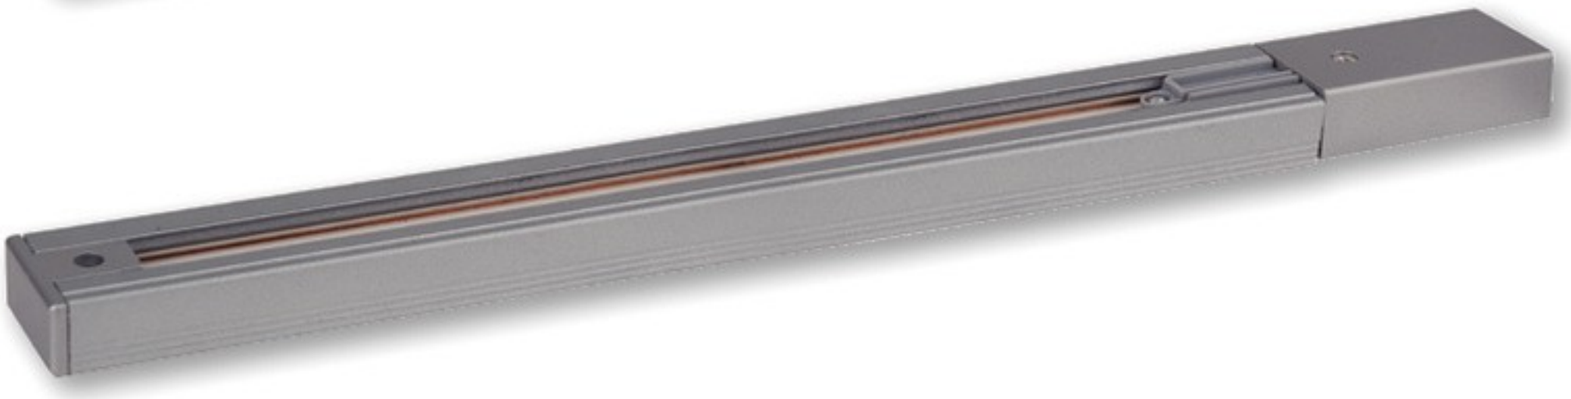

1-Phase 2000 mm Track, 250V 16A

- Including: Connection Adapter and Endcap

A0312001 Black - (RAL9004)
A0312002 White - (RAL9003)
A0312003 Silver - (RAL9006)

Track-lights



1-Phase Adapter

A0313101 Black (RAL9004)
A0313102 White (RAL9003)
A0313103 Silver (RAL9006)



Feed-in Connector

A0313201 Black (RAL9004)
A0313202 White (RAL9003)
A0313203 Silver (RAL9006)



Endcap

A0313301 Black (RAL9004)
A0313302 White (RAL9003)
A0313303 Silver (RAL9006)



Straight Connector

A0313401 Black (RAL9004)
A0313402 White (RAL9003)
A0313403 Silver (RAL9006)



Left T-Connector, with power entry

A0313701 Black (RAL9004)
A0313702 White (RAL9003)
A0313703 Silver (RAL9006)



Right T-Connector, with power entry

A0313711 Black (RAL9004)
A0313712 White (RAL9003)
A0313713 Silver (RAL9006)



Flexible Corner Connector

A0313501 Black - (RAL9004)
A0313502 White - (RAL9003)
A0313503 Silver - (RAL9006)



Flexible Corner Connector



Flexible Corner Connector

Track-lights




New York-B **A0320011**
Black (RAL9004), Spot max 50W MR-16 GU5.3

New York-W **A0320012**
White (RAL9003), Spot max 50W MR-16 GU5.3

New York-S **A0320013**
Silver (RAL9006), Spot max 50W MR-16 GU5.3

- Housing: Aluminium powder coated
- Including: 1-Phase Track adapter with built-in Transformer

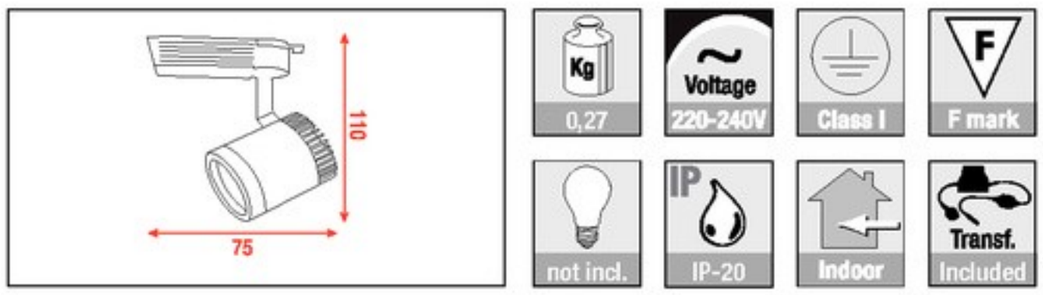




London-B **A0320021**
Black (RAL9004) - Spot max. 50W MR-16 GU5.3

London-W **A0320022**
White (RAL9003) - Spot max. 50W MR-16 GU5.3

London-S **A0320023**
Silver (RAL9006) - Spot max. 50W MR-16 GU5.3

- Housing: Aluminium powder coated
- Including: 1-Phase Track adapter with built-in Transformer

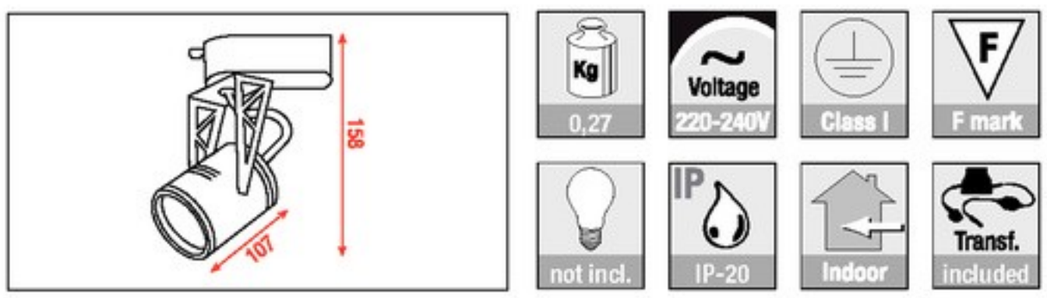

Track-lights





Paris-B **A0320031**
Black (RAL9004) - Spot max. 50W MR-16 GU5.3

Paris-W **A0320032**
White (RAL9003) - Spot max. 50W MR-16 GU5.3

Paris-S **A0320033**
Silver (RAL9006) - Spot max. 50W MR-16 GU5.3

- Housing: Aluminium powder coated
- Including: 1-Phase Track adapter with built-in Transformer

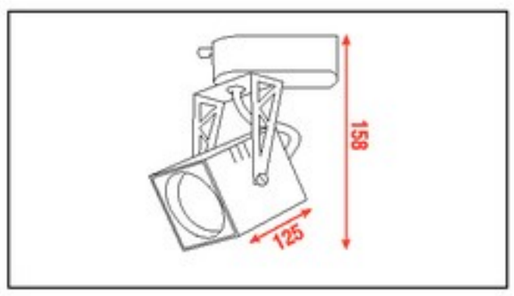

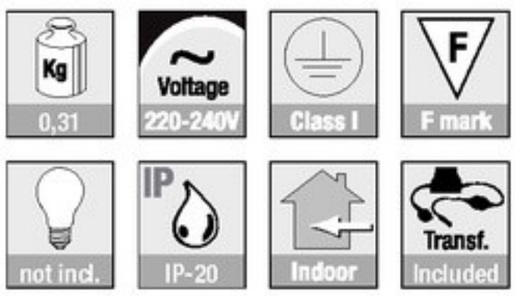






Track-lights

Barcelona-B **A0320041**
Black (9004) - Spot max. 50W 111-IRC

Barcelona-W **A0320042**
White (9003) - Spot max. 50W 111-IRC

Barcelona-S **A0320043**
Silver (9006) - Spot max. 50W 111-IRC

- Housing: Aluminium powder coated
- Including: 1-Phase Track adapter with built-in Transformer

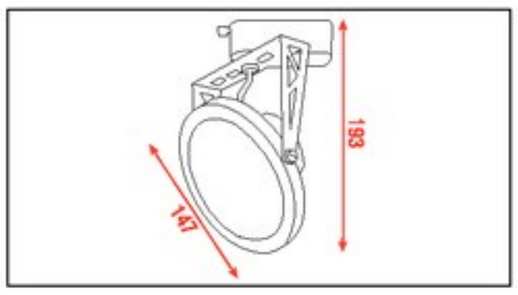








Rimini-1S **A0320053**
Silver (RAL9006) - 51-IRC 50W MR-16 GU-5.3


- Housing: Aluminium powder coated
- Including: 1-Phase Track adapter with built-in transformer

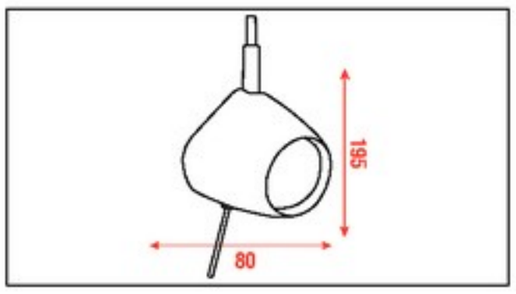






Track-lights

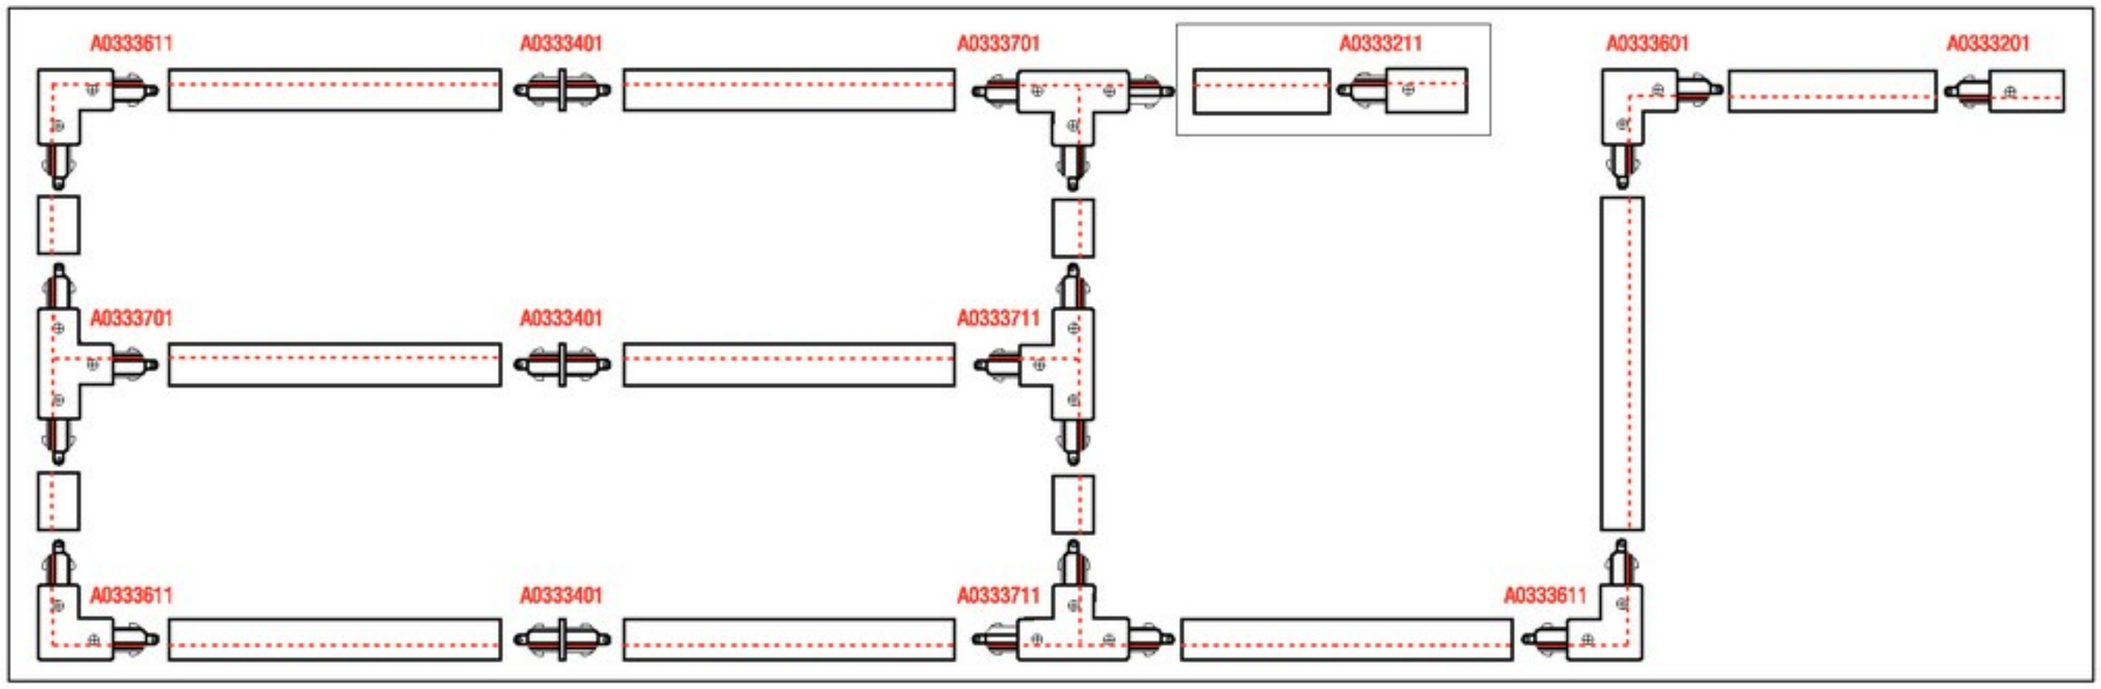



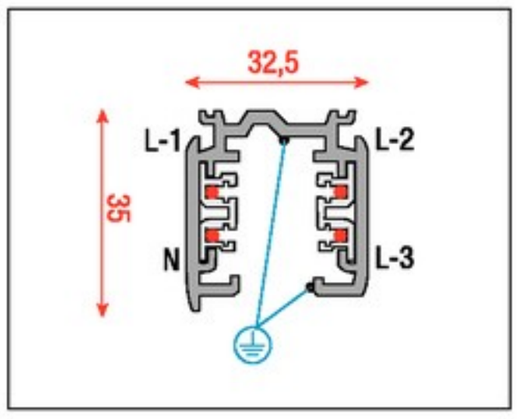

3P Surface Tracks

3-Phase 1000 mm Track, 250V 16A

A0331001 Black (RAL9004)
A0331002 White (RAL9003)
A0331003 Silver (RAL9006)


3-Phase 1500 mm Track, 250V 16A

A0331501 Black (RAL9004)
A0331502 White (RAL9003)
A0331503 Silver (RAL9006)


3-Phase 2000 mm Track, 250V 16A

A0332001 Black (RAL9004)
A0332002 White (RAL9003)
A0332003 Silver (RAL9006)

Track-lights

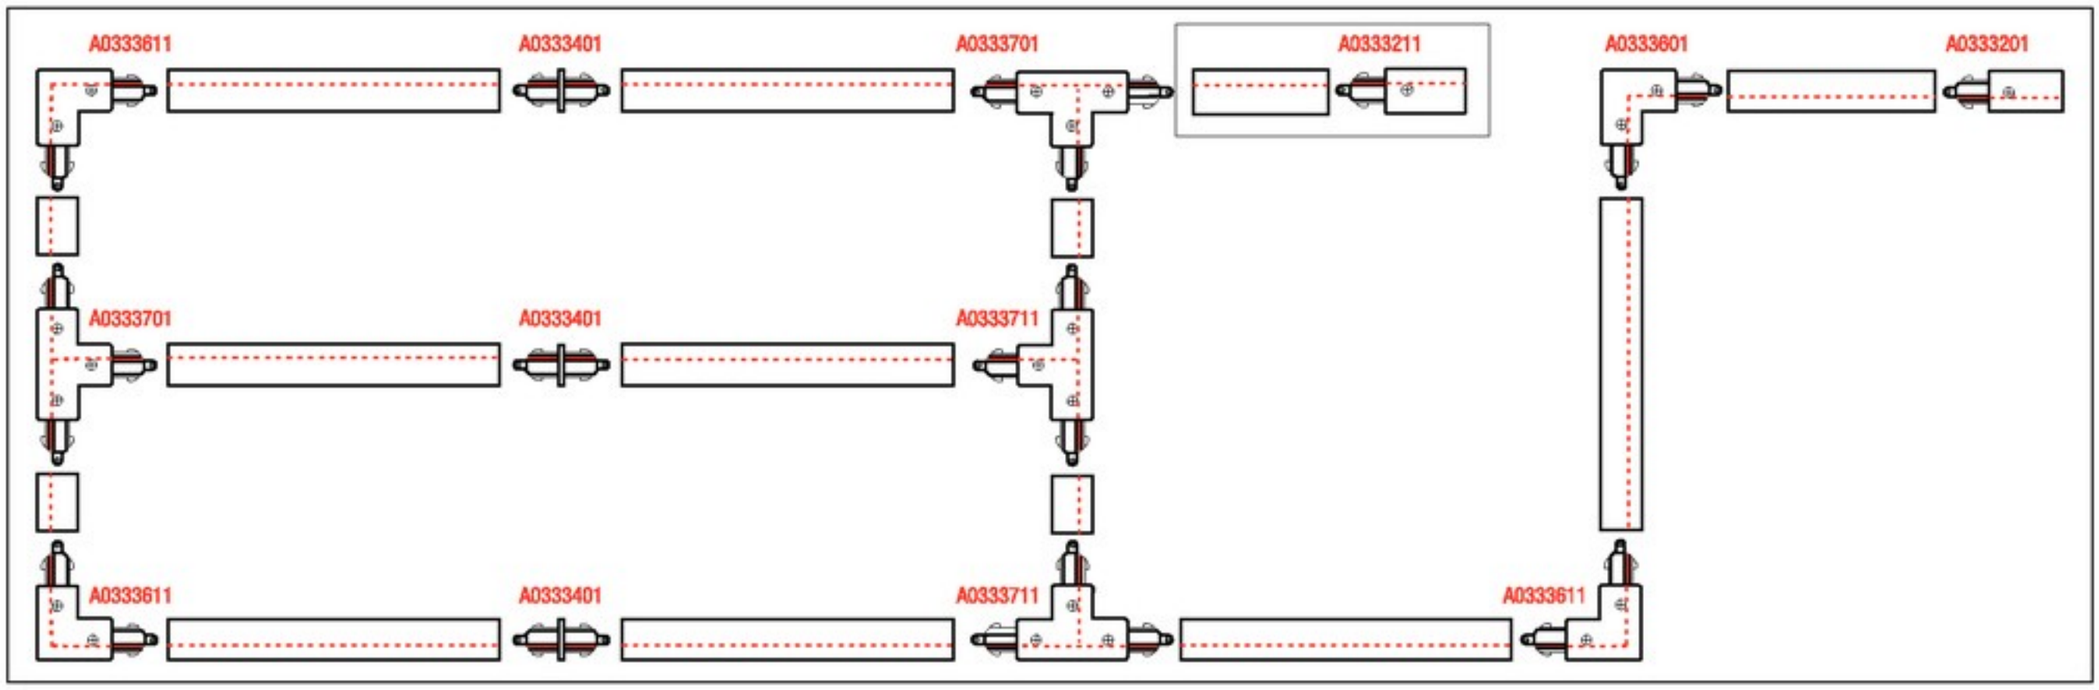



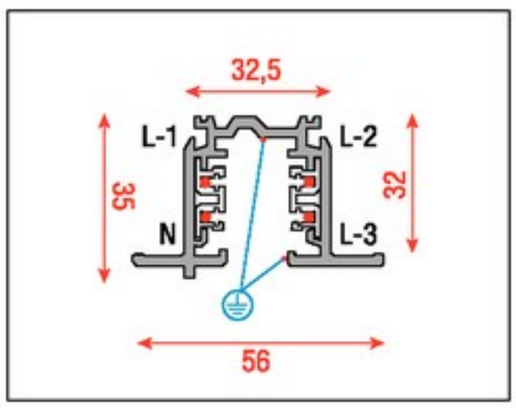

Recessed Tracks

3-Phase 1000 mm Track, 250V 16A

A0331011 Black (RAL9004)
A0331012 White (RAL9003)
A0331013 Silver (RAL9006)

3-Phase 1500 mm Track, 250V 16A

A0331511 Black (RAL9004)
A0331512 White (RAL9003)
A0331513 Silver (RAL9006)

3-Phase 2000 mm Track, 250V 16A

A0332011 Black (RAL9004)
A0332012 White (RAL9003)
A0332013 Silver (RAL9006)

Track-lights



Track-lights

Bending Tool
A0310002



3-Phase Adapter
A0333101 Black (RAL9004)
A0333102 White (RAL9003)
A0333103 Silver (RAL9006)



Left Feed-in Connector
A0333201 Black (RAL9004)
A0333202 White (RAL9003)
A0333203 Silver (RAL9006)



Right Feed-in Connector
A0333211 Black (RAL9004)
A0333212 White (RAL9003)
A0333213 Silver (RAL9006)



Straight Connector
A0333401 Black (RAL9004)
A0333402 White (RAL9003)
A0333403 Silver (RAL9006)



Flexible Corner Connector
A0333501 Black (RAL9004)
A0333502 White (RAL9003)
A0333503 Silver (RAL9006)



Right T-Connector, with power entry
A0333711 Black (RAL9004)
A0333712 White (RAL9003)
A0333713 Silver (RAL9006)



Left T-Connector, with power entry
A0333701 Black (RAL9004)
A0333702 White (RAL9003)
A0333703 Silver (RAL9006)



Ceiling Kit
A0333801 Black (RAL9004)
A0333802 White (RAL9003)
A0333803 Silver (RAL9006)



Endcap
A0333301 Black (RAL9004)
A0333302 White (RAL9003)
A0333303 Silver (RAL9006)




Ceiling Suspension Kit
- Including: steel wire

A0333811 Black (RAL9004)
- With max. 1500 mm steel wire

A0333812 White (RAL9003)
- With max. 1500 mm steel wire

A0333813 Silver (RAL9006)
- With max. 1500 mm steel wire

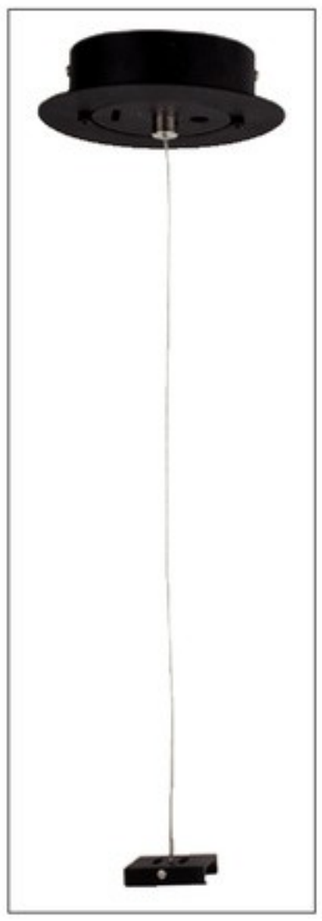


Ceiling Suspension Kit
- Including: Lead+steel wire

A0333821 Black (RAL9004)
- With max. 1500 mm steel wire

A0333822 White (RAL9003)
- With max. 1500 mm steel wire

A0333823 Silver (RAL9006)
- With max. 1500 mm steel wire

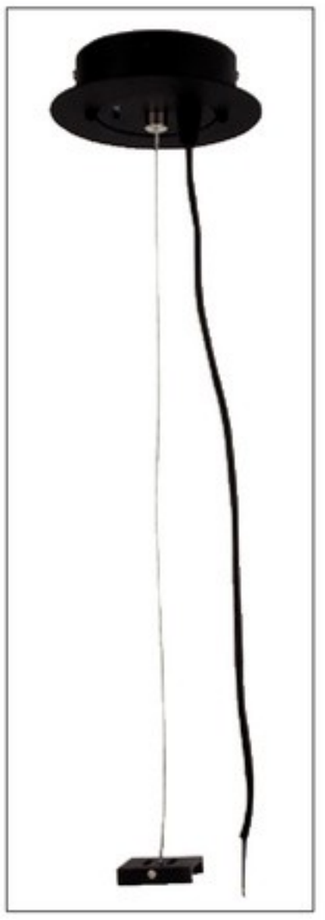






Palermo-3B10 **A0340061**
Black (RAL9004) - HCI-TF 20W 10° Reflector

Palermo-3W10 **A0340062**
White (RAL9003) - HCI-TF 20W 10° Reflector

Palermo-3S10 **A0340063**
Silver (RAL9006) - HCI-TF 20W 10° Reflector

- Housing: Polished aluminium
- Including: 3-Phase track adapter with built in Philips el. ballast



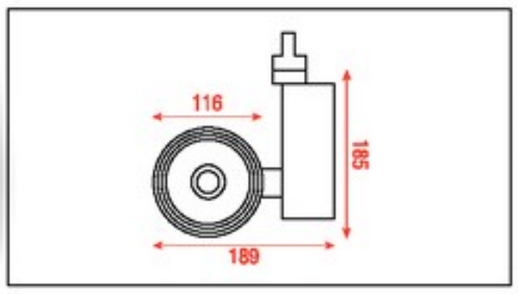








Palermo-3B45 **A0340071**
Black (RAL9004) - HCI-TF 20W 45° Reflector


Palermo-3W45 **A0340072**
White (RAL9003) - HCI-TF 20W 45° Reflector

Palermo-3S45 **A0340073**
Silver (RAL9006) - HCI-TF 20W 45° Reflector

- Housing: Polished aluminium
- Including: 3-Phase track adapter with built in Philips el. ballast



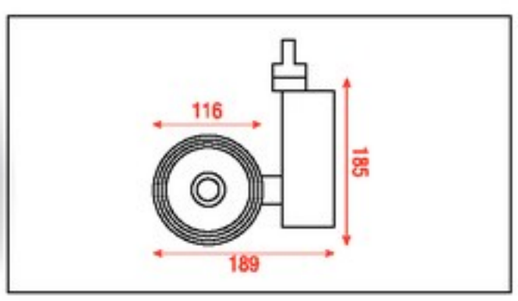

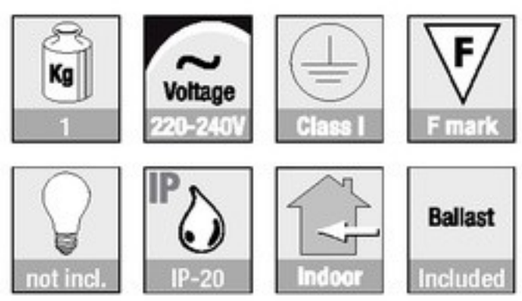


Track-lights

Milano-3B70 **A0340031**
Black (RAL9004), CDM-R111 70W GX8,5

Milano-3W70 **A0340032**
White (RAL9003), CDM-R111 70W GX8,5

Milano-3S70 **A0340033**
Silver (RAL9006), CDM-R111 70W GX8,5

- Housing: Aluminium powder coated
- Including: Philips el. ballast in die cast aluminium gear-box
- Various beam direction: 355° horizontal- and 90° vertical- rotation
- Incl.: 3-Phase track adapter

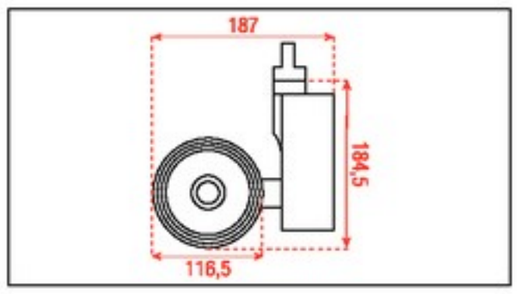








Milano-3B100 **A0340041**
Black (RAL9004), 50-75-100W, 111 IRC

Milano-3W100 **A0340042**
White (RAL9003), 50-75-100W, 111 IRC

Milano-3S100 **A0340043**
Silver (RAL9006), 50-75-100W, 111 IRC

- Housing: Aluminium powder coated
- Including: Philips el. transformer in die cast aluminium gear-box
- Various beam direction: 355° horizontal- and 90° vertical- rotation
- Incl.: 3-Phase track adapter

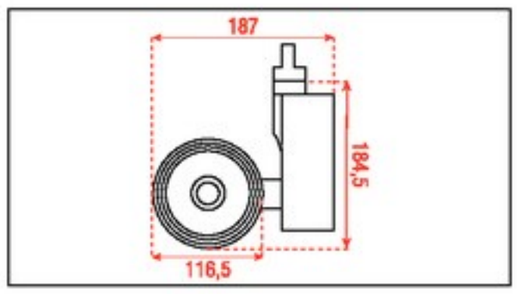










Monaco-3B10 **A0340151**
Black (RAL9004) with 10° Reflector for HIT-CE 35W

Monaco-3W10 **A0340152**
White (RAL9003) with 10° Reflector for HIT-CE 35W

Monaco-3S10 **A0340153**
Silver (RAL9006) with 10° Reflector for HIT-CE 35W

- Housing: Polished Aluminium
- Including: Built-in Atco electromagnetic Ballast and 3-phase Track adapter included

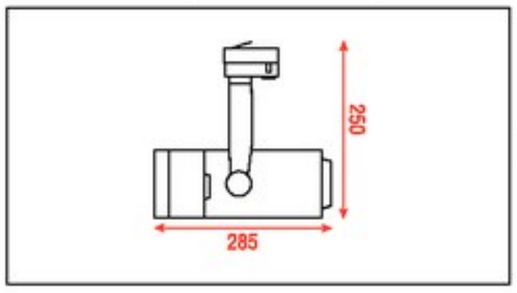







Monaco-3B45 **A0340161**
Black (RAL9004) with 45° Reflector for HIT-CE 35W

Monaco-3W45 **A0340162**
White (RAL9003) with 45° Reflector for HIT-CE 35W

Monaco-3S45 **A0340163**
Silver (RAL9006) with 45° Reflector for HIT-CE 35W

- Housing: Polished Aluminium
- Including: Built-in Atco electromagnetic Ballast and 3-phase Track adapter

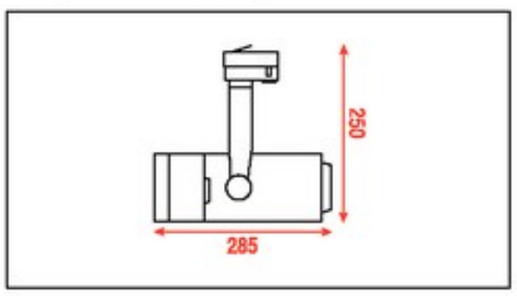

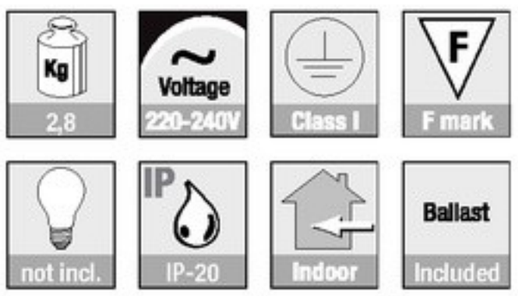

Track-lights



Track-lights




Track-lights

Monaco-4B10 **A0340171**
Black (RAL9004) with 10° for HIT-CE 70W

Monaco-4W10 **A0340172**
White (RAL9003) with 10° Reflector for HIT-CE 70W

Monaco-4S10 **A0340173**
Silver (RAL9006) with 10° Reflector for HTI-CE 70W

- Housing: Polished Aluminium
- Including: Built-in Atco electromagnetic Ballast and 3-phase Track adapter

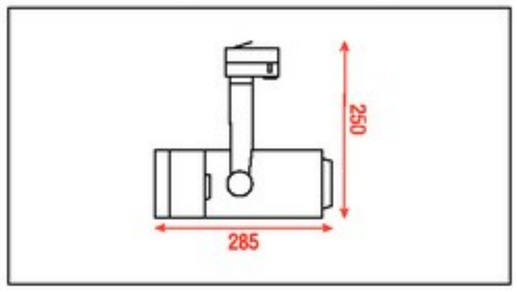







Monaco-4B45 **A0340181**
Black (RAL9004) with 45° Reflector for HIT-CE 70W

Monaco-4W45 **A0340182**
White (RAL9003) with 45° Reflector for HIT-CE 70W

Monaco-4S45 **A0340183**
Silver (RAL9006) with 45° Reflector for HIT-CE 70W

- Housing: Polished Aluminium
- Including: Built-in Atco electromagnetic Ballast and 3-phase Track adapter

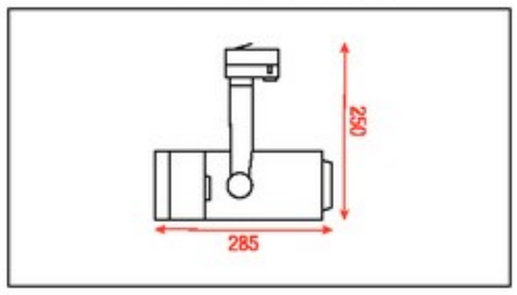

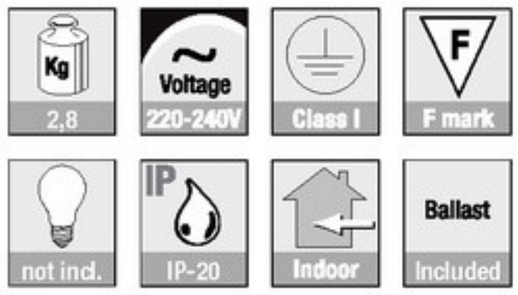

Artecta **3-Phase spots Accessories**		
Monaco 3P - Barndoor Black		A0350001
Monaco 3P - Anti dazzle screen		A0350003
Monaco 3P - Red colour filter		A0350011
Monaco 3P - Green colour filter		A0350012
Monaco 3P - Blue colour filter		A0350013
Monaco 3P - Yellow colour filter		A0350014







Zürich-1B **A0340211**
Black (RAL9004), Wallwasher for HCI-TS 70W

Zürich-1W **A0340212**
White (RAL9003), Wallwasher for HCI-TS 70W

Zürich-1S **A0340213**
Silver (RAL9006), Wallwasher for HCI-TS 70W

- Housing: Polished aluminium
- Including: 3-Phase adapter with built-in el. magnetic ballast

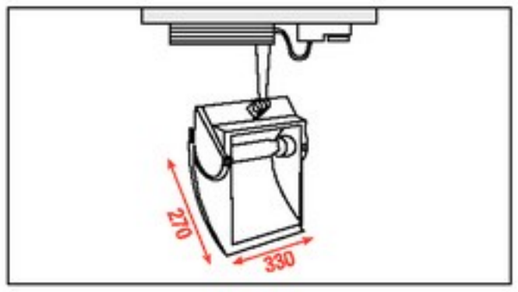

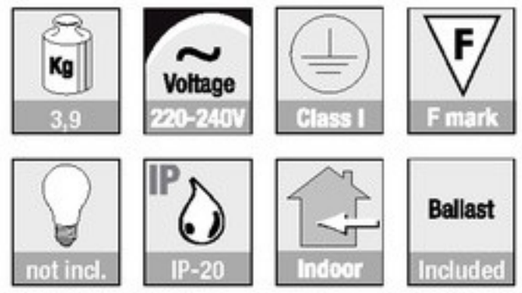




Zürich-2B **A0340221**
Black (RAL9004), Wallwasher for HCI-TS 150W

Zürich-2W **A0340222**
White (RAL9003), Wallwasher for HCI-TS 150W

Zürich-2S **A0340223**
Silver (RAL9006), Wallwasher for HCI-TS 150W

- Housing: Polished aluminium
- Including: 3-Phase adapter with built-in el. magnetic ballast

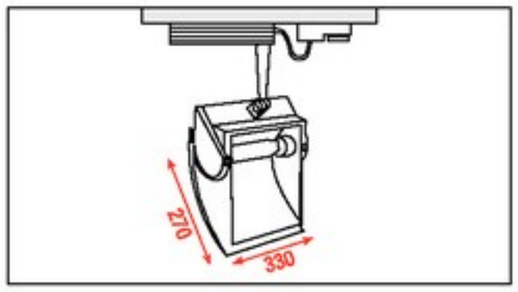



Artecta **3-Phase spots Accessories**		
Barndoor for Zürich Wallwasher	Black (RAL9004)	**A0350101**

Track-lights





Napoli-16B **A0340251**
Black (RAL9004), MR16 max. 50W


Napoli-16W **A0340252**
White (RAL9003), MR16 max. 50W


Napoli-16S **A0340253**
Silver (RAL9006), MR16 max. 50W

- Housing: Aluminum powder-coated
- Weight: 0,85 kg
- Dimensions fixture: 190 x 155 x ø85 mm

Adjustable:
Horizontal: 330 degree
Vertical: 90 degree
Built-in Philips electronic ballast
Operating Power: 220-240V AC



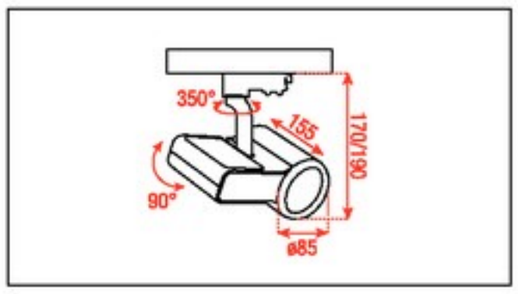

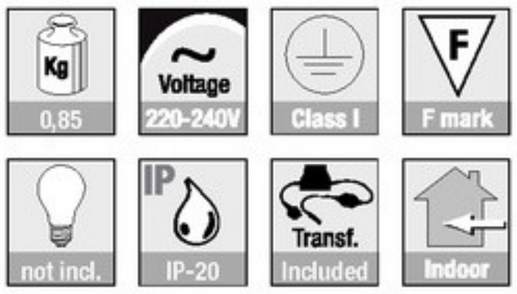



Napoli-20B **A0340261**
Black (RAL9004), CDM-TF 20W


Napoli-20W **A0340262**
White (RAL9003), CDM-TF 20W

Napoli-20S **A0340263**
Silver (RAL9006), CDM-TF 20W

- Housing: Aluminum powder-coated
- Weight: 0,85 kg
- Dimensions fixture: 190 x 155 x ø85 mm

Adjustable:
Horizontal: 350 degree
Vertical: 90 degree
Built-in Philips electronic ballast
Operating Power: 220-240V AC
Incl. 2 reflectors (10°+45°)



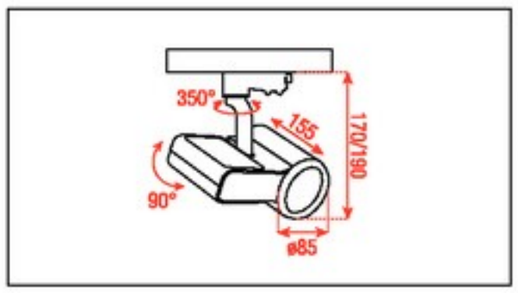



Track-lights






Monza-20B **A0340311**
Black (RAL9004), CDM-R111 20W GX8.5


Monza-20W **A0340312**
White (RAL9003), CDM-R111 20W GX8.5

Monza-20S **A0340313**
Silver (RAL9006), CDM-R111 20W GX8.5

- Housing: Aluminum powder-coated
- Weight: 1,25 kg
- Dimensions: 220 x 175 x ø117 mm

Adjustable:
Horizontal: 350 degree
Vertical: 90 degree
Built-in Philips electronic ballast
Operating Power: 220-240V AC

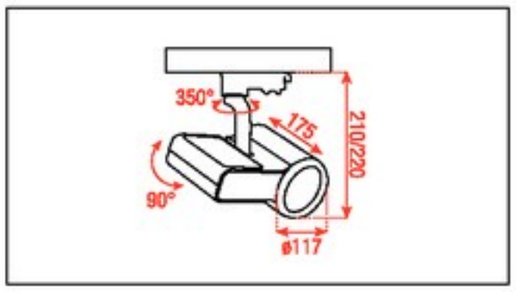

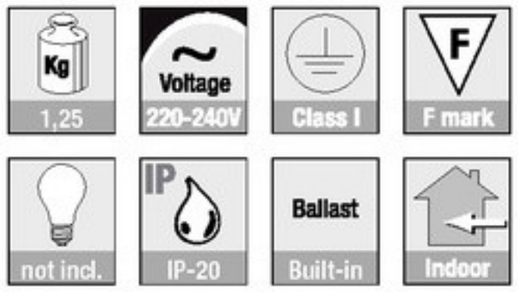




Monza-35B **A0340321**
Black (RAL9004), CDM-R111 35W GX8.5


Monza-35W **A0340322**
White (RAL9003), CDM-R111 35W GX8.5

Monza-35S **A0340323**
Silver (RAL9006), CDM-R111 35W GX8.5

- Housing: Aluminum powder-coated
- Weight: 1,25 kg
- Dimensions: 220 x 175 x ø117 mm

Adjustable:
Horizontal: 350 degree
Vertical: 90 degree
Built-in Philips electronic ballast
Operating Power: 220-240V AC

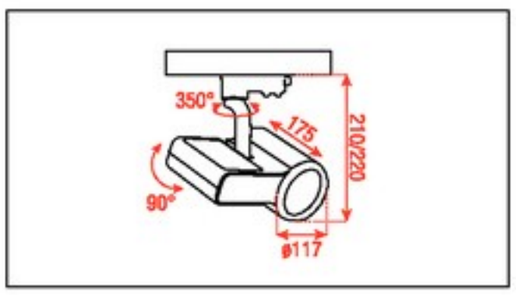

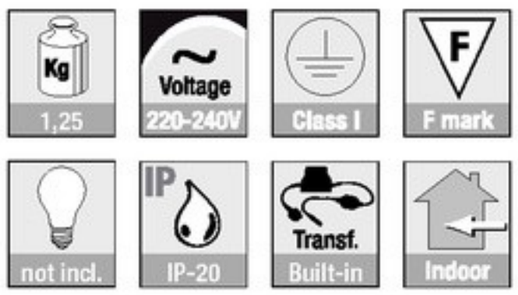

Track-lights



Track-lights



Monza-70B **A0340331**
Black (RAL9004), CDM-R111 70W GX8.5


Monza-70W **A0340332**
White (RAL9003), CDM-R111 70W GX8.5


Monza-70S **A0340333**
Silver (RAL9006), CDM-R111 70W GX8.5

- Housing: Aluminum powder-coated
- Weight: 1,25 kg
- Dimensions: 220 x 175 x ø117 mm

Adjustable:
Horizontal: 350 degree
Vertical: 90 degree
Built-in Philips electronic ballast
Operating Power: 220-240V AC



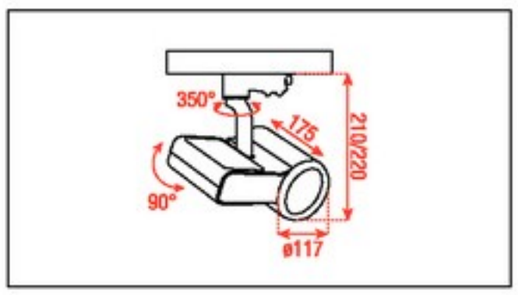

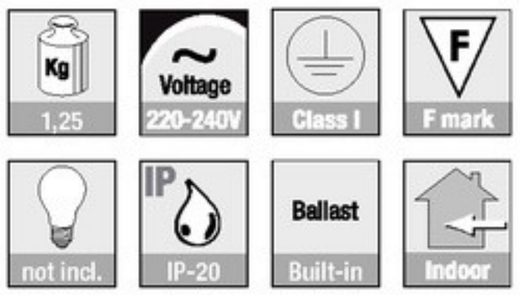



Monza-111B **A0340431**
Black (RAL9004), QR-111 max.100W G53


Monza-111W **A0340432**
White (RAL9003), QR-111 max.100W G53


Monza-111S **A0340433**
Silver (RAL9006), QR-111 max.100W G53

- Housing: Aluminum powder-coated
- Weight: 1,25 kg
- Dimensions: 220 x 175 x ø117 mm

Adjustable:
Horizontal: 350 degree
Vertical: 90 degree
Built-in Philips electronic ballast
Operating Power: 220-240V AC



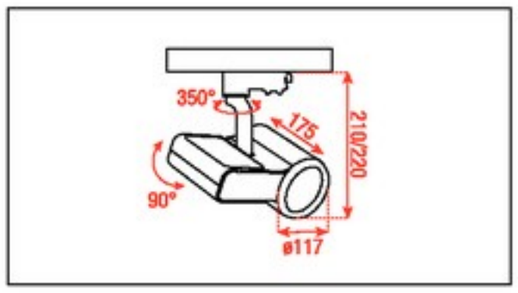

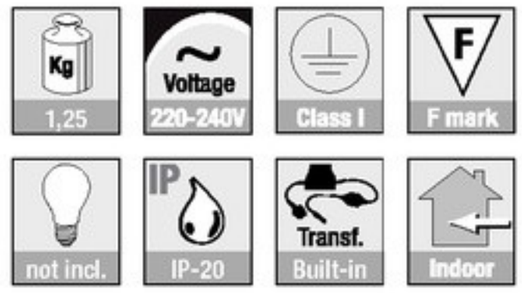

Track-lights

3-Phase spots

Inground spots

LED TECHNOLOGY




Monroe-Mini-1 LED WW

A0520007

1x 1W warm-white LED, 1-way light direction

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Finish: silver sand anodisized (RAL 9006)
- Operating Power: constant current 350mA

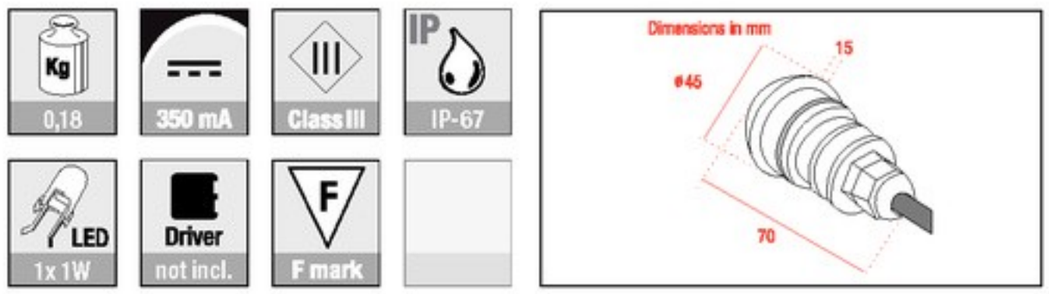




Monroe-Mini-2 LED WW

A0520008

1x 1W warm-white LED, 2-way light direction

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Finish: silver sand anodisized (RAL 9006)
- Operating Power: constant current 350mA

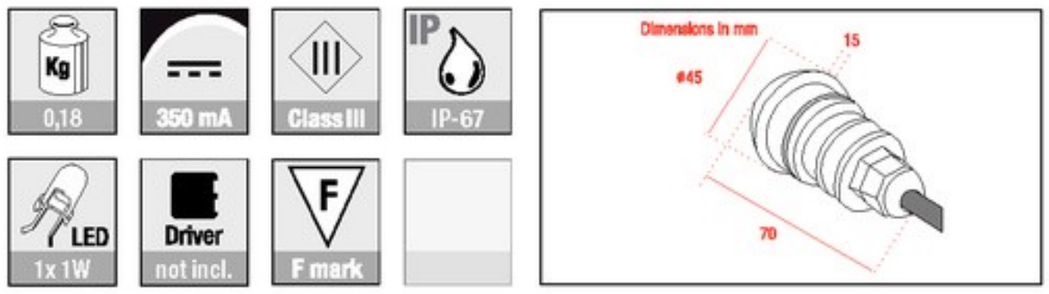




Monroe-Mini-3 LED WW

A0520009


1x 1W warm-white LED, 3-way light direction

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62, Zn 0.1, Si 0.4)
- Finish: silver sand anodisized (RAL 9006)
- Operating Power: constant current 350mA

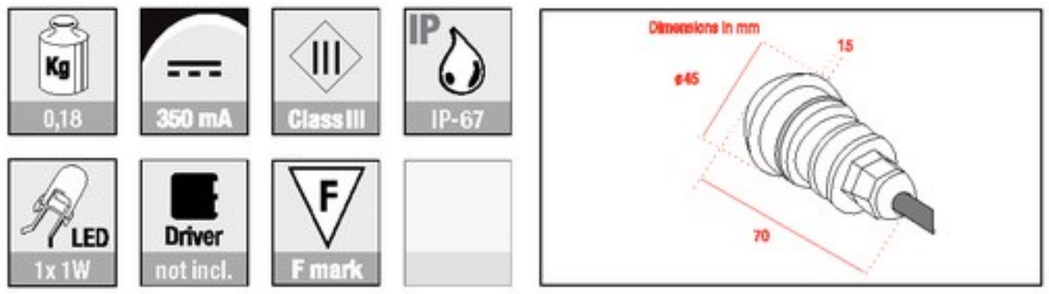

Mountingbox-Adapter small	
A9930006	More info on page 178


Inground spots

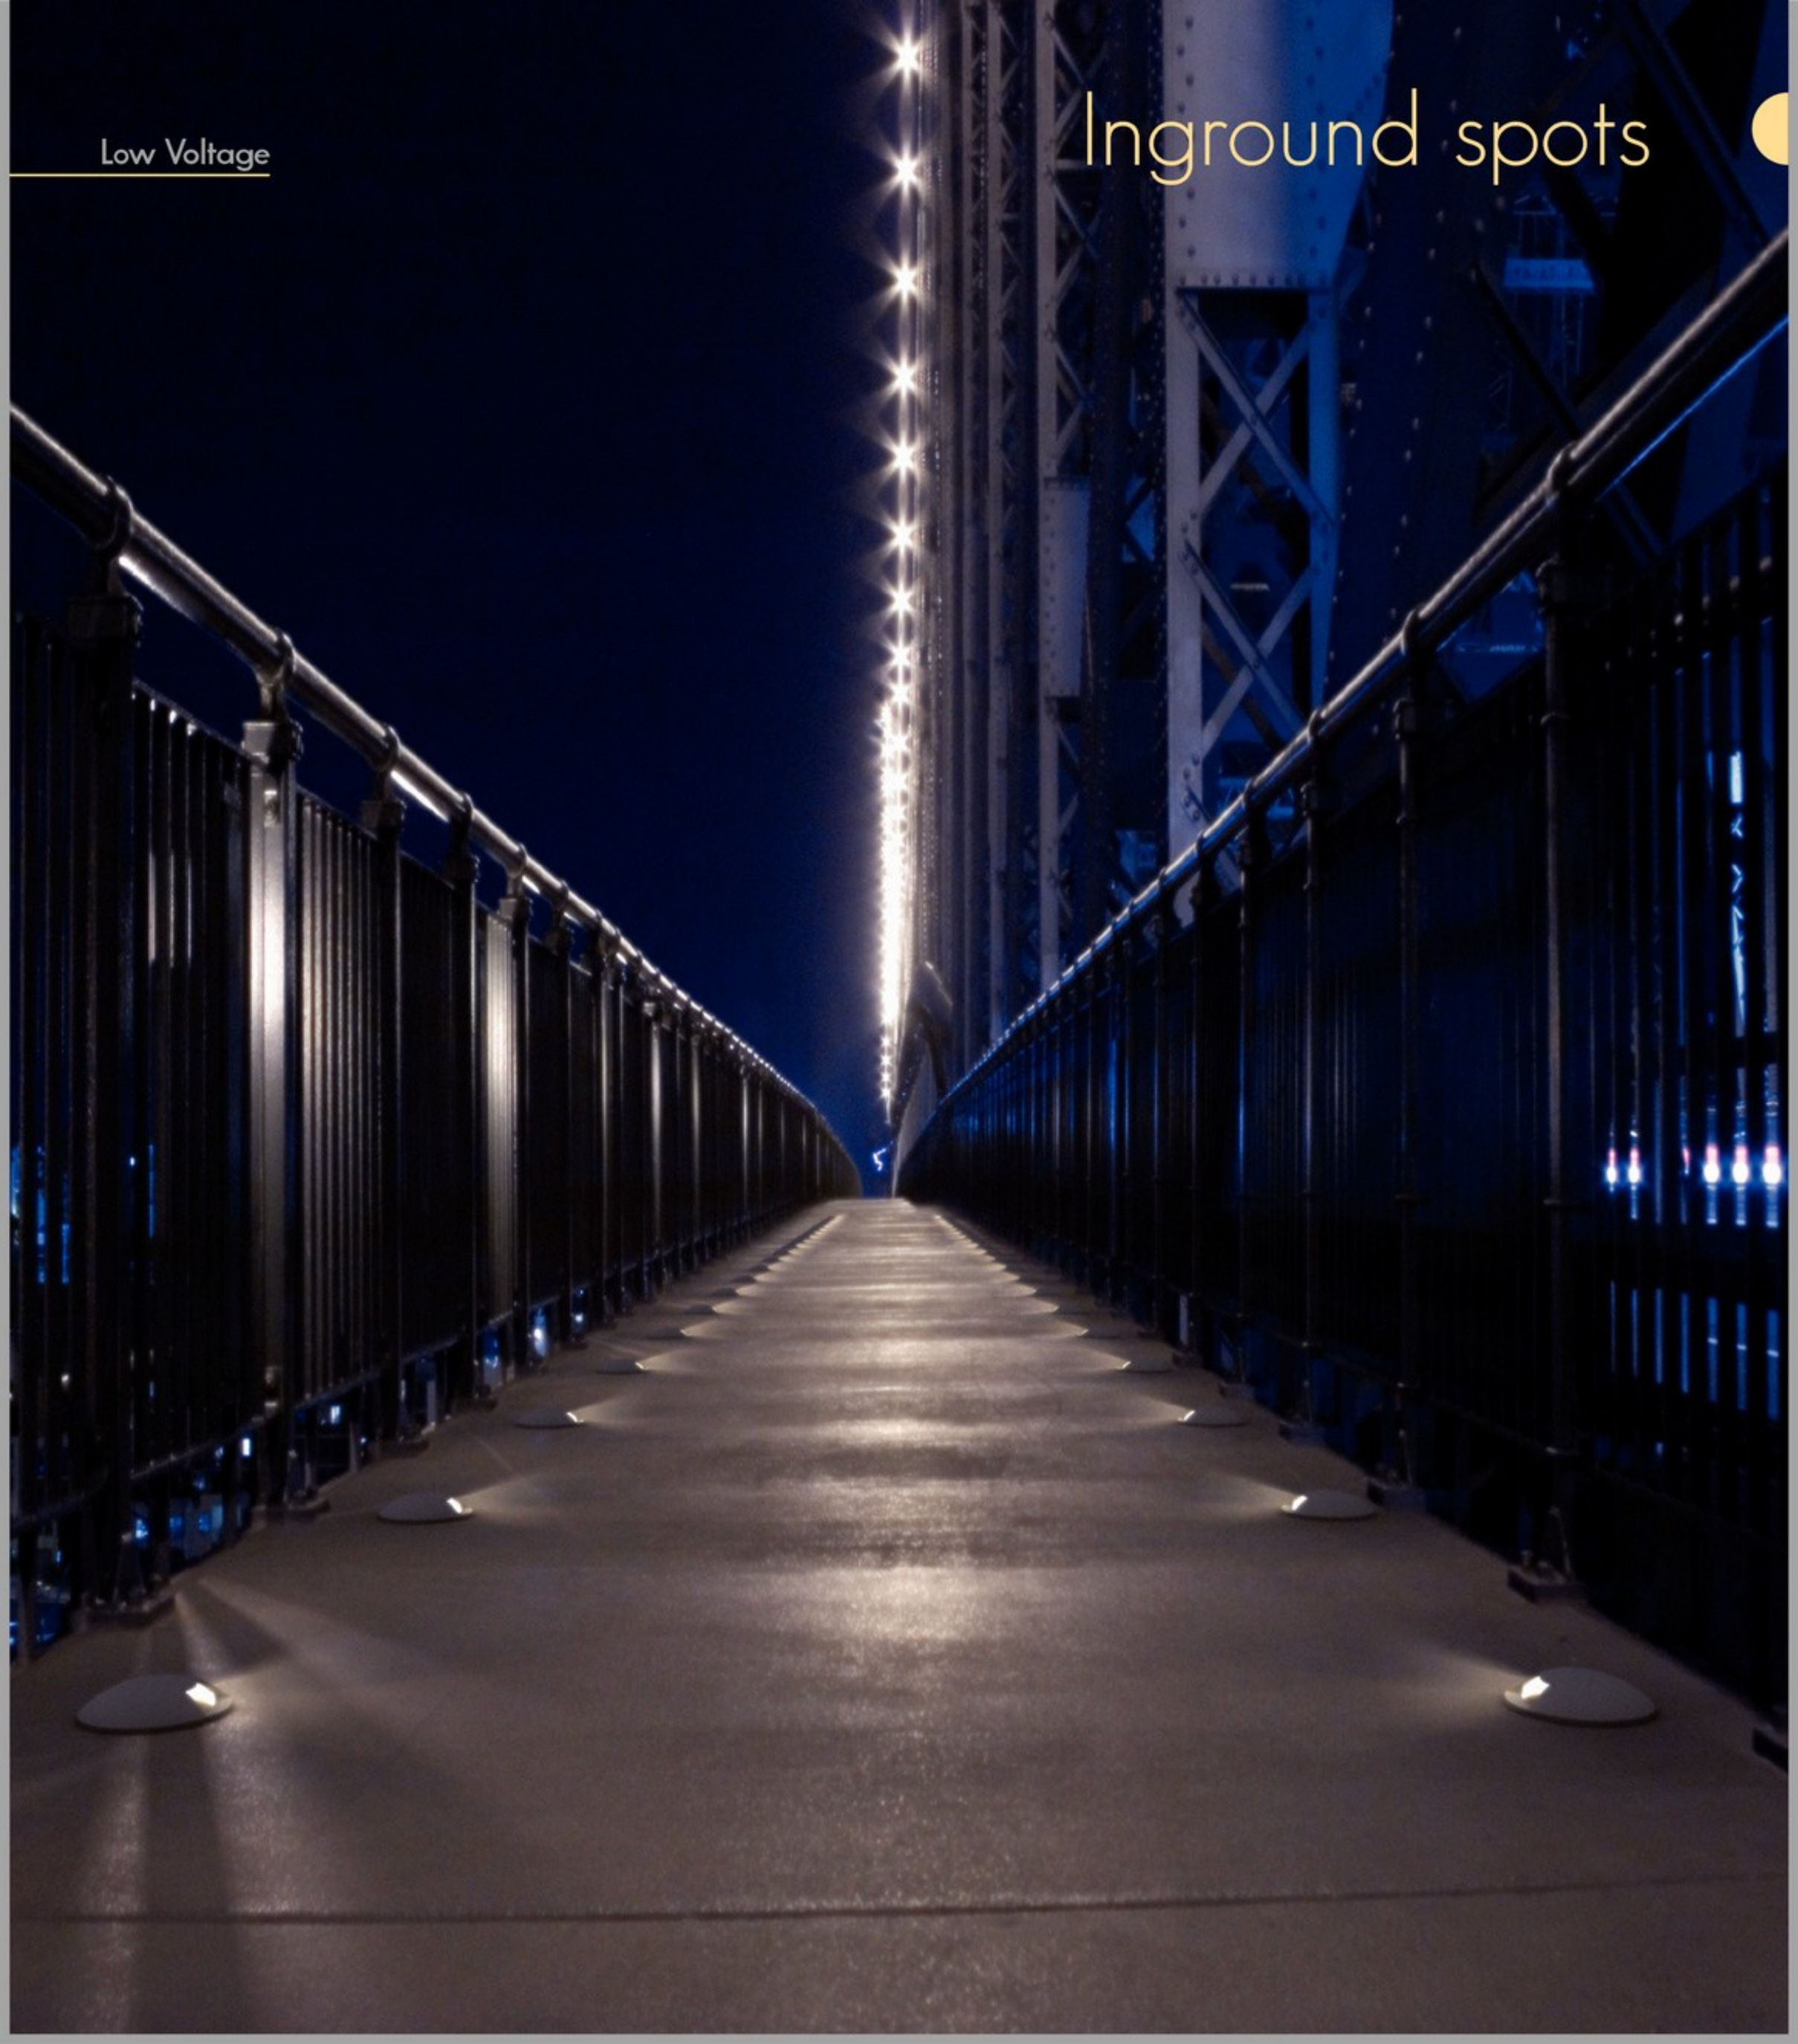

Inground spots

LED TECHNOLOGY







Miami-1WW **A0520010**
1 x 1W Warm White LED

Miami-1B **A0520011**
With 1 x 1W Blue LED

- LED beam angle: 30°
- Input Voltage: 24V DC
- Power consumption: 1.7W
- Stainless steel 316 trim
- Die-cast aluminium housing
- Hi-power LED
- Power and driver
- 12 mm clear step glass
- Silicone gasket



Miami-3WW **A0520012**
1 x 3W Warm White LED


Miami-3B **A0520013**
1 x 3W Blue LED

Miami-3RGB **A0520014**
1 x 3W 3-in one RGB LED

- RGB Controller not incl.
- LED beam angle: 30°
- Input Voltage: 24V DC
- Power consumption: 3,7W









Miami-10WW **A0520015**
1 x 1W Warm White LED

Miami-10B **A0520016**
1 x 1W Blue LED

- LED beam angle: 30°
- Input Voltage: 24V DC
- Power consumption: 1,7W



Miami-30WW **A0520017**
1 x 3W Warm White LED

Miami-30B **A0520018**
1 x 3W Blue LED

Miami-30RGB **A0520019**
1 x 3W 3-in one RGB LED

- LED beam angle: 30°
- Input Voltage: 24V DC
- Power consumption: 3,7W
- RGB Controller not incl.



Inground spots



Inground spots


LED TECHNOLOGY




Vegas-RGB — A0520203

3 x 3W RGB in-one LED, 24V DC

- Stainless steel 304 trim
- Die cast aluminium housing
- Hi Power LED's
- 6 mm tempered glass
- PG-9 cable gland
- Power: 240V AC
- Power RGB-version: 24V DC
- RGB Controller not incl.

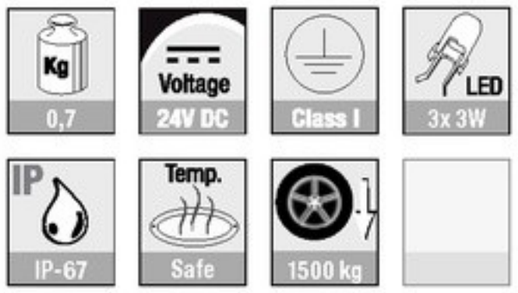

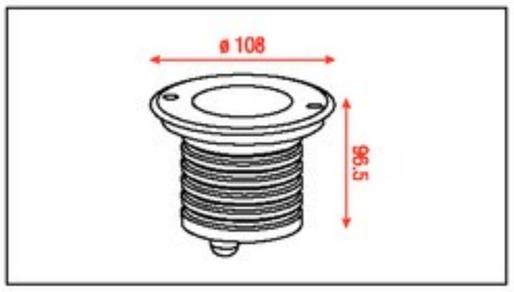





Dallas-RGB — A0520303

6 x 3W RGB in-one LED, 24V DC

- Stainless steel 304 trim
- Die cast aluminium housing
- Hi Power LED's
- 6 mm tempered glass
- PG-9 cable gland
- Power: 240V AC
- Power RGB-version: 24V DC
- RGB Controller not incl.

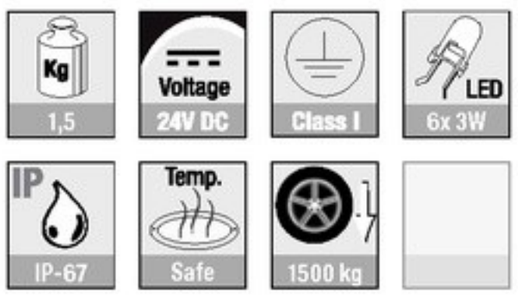

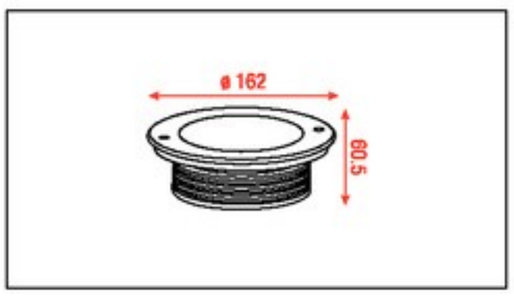





Utah-36RGB — A0520403

12 x 3W 3 RGB in-one, 24V DC

- Stainless steel 304 trim
- Die cast aluminium housing
- Hi Power LED's
- 6 mm tempered glass
- PG-9 cable gland
- Power: 240V AC
- Power RGB-version: 24V DC
- RGB Controller not incl.

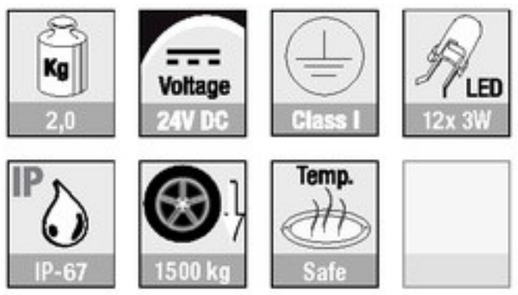

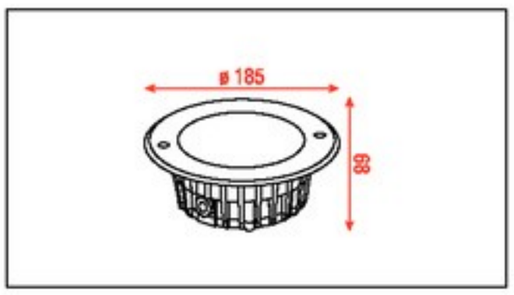

Inground spots




Ottawa-RGB
1 x 1,5W RGB in-one LED

A0520463

- Stainless steel 304 trim
- Die cast aluminium housing
- Hi Power LED's
- LED-driver included

- 6 mm tempered glass
- PG-9 cable gland
- Power: 24V DC
- RGB Controller not incl.

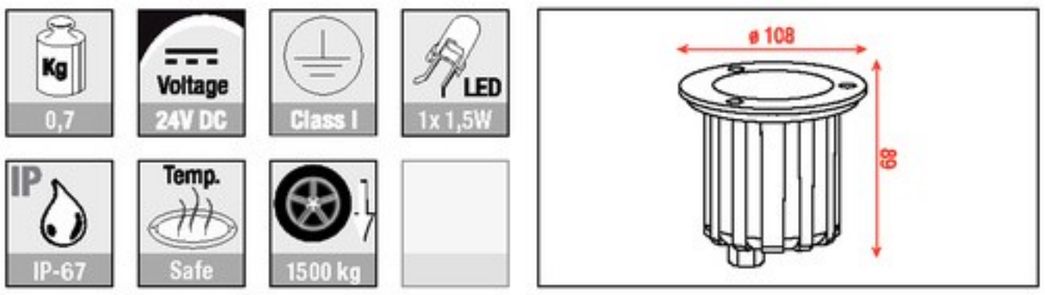




Calgary-RGB
1 x 3W RGB in-one LED

A0520473


- Stainless steel trim
- Die cast aluminium housing
- Hi Power LED's
- Power & LED-driver

- 8 mm tempered glass
- PG-9 cable gland
- Power: 24V DC
- RGB Controller not incl.

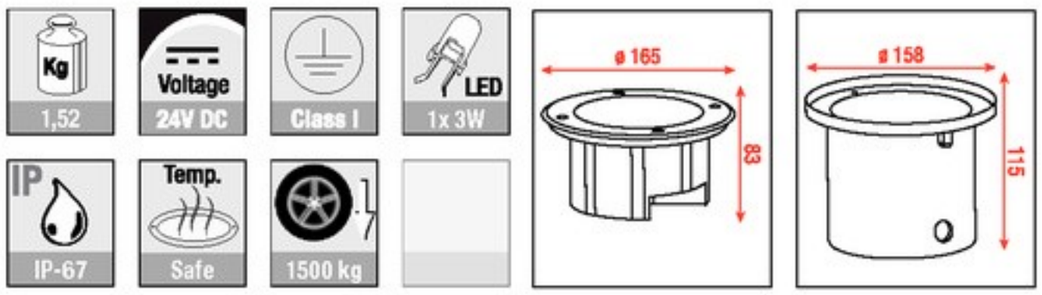



Inground spots

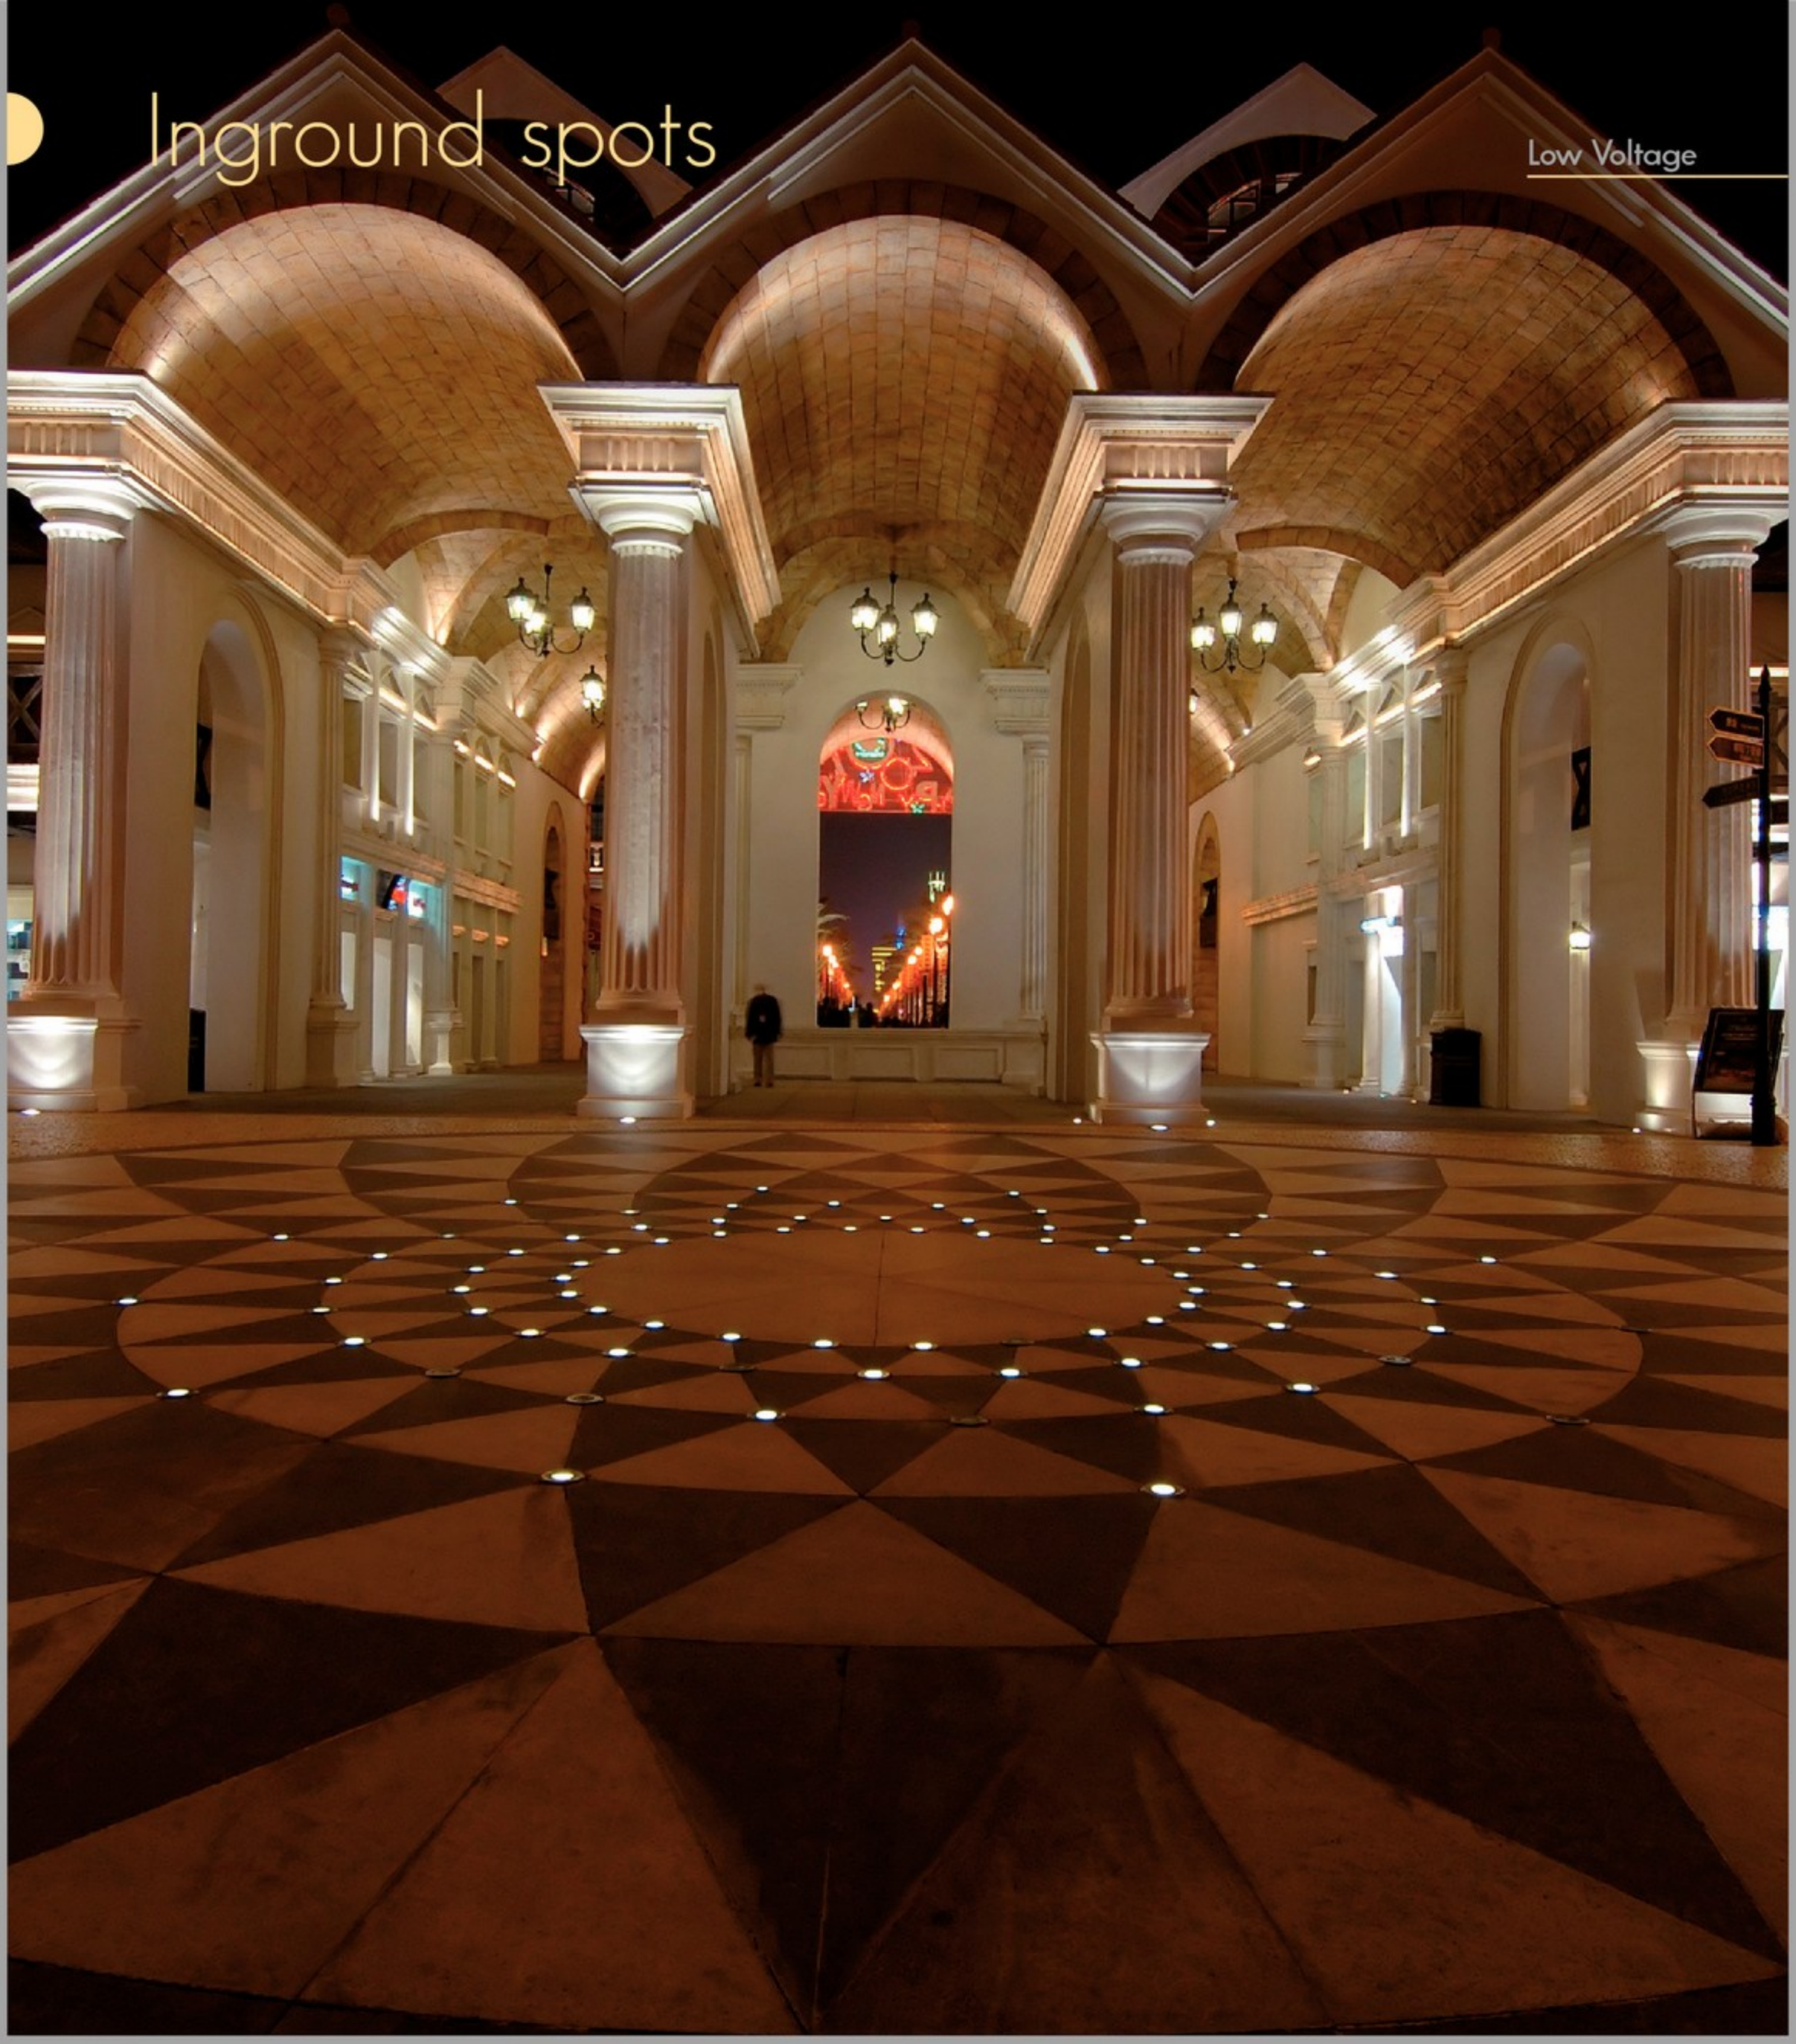



Inground spots

Montana-1WW — A0520101
1 x 1W 25° Warm White LED

Montana-1B — A0520102
1 x 1W 25° Blue LED


- Stainless steel trim
- Die cast aluminium housing
- Hi Power LED's
- Power & LED-driver
- 8 mm tempered glass
- PG-9 cable gland
- Power: 24V DC
- Incl. ABS housing sleeve

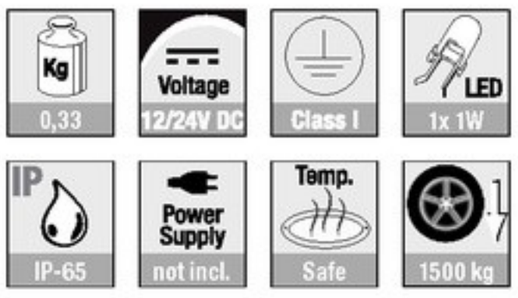

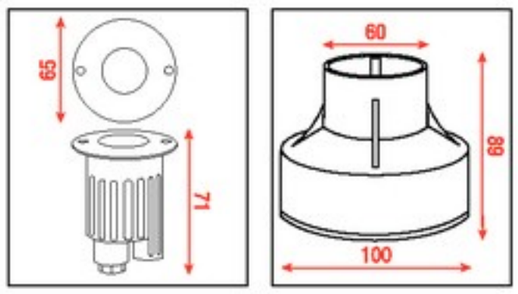

Montana-3RGB — A0520120
1 x 3W (3-in-one) 25° RGB LED


- Stainless steel trim
- Die cast aluminium housing
- Hi Power LED's
- Power & LED-driver
- 8 mm tempered glass
- PG-9 cable gland
- Power: 24V DC
- Incl. ABS housing sleeve
- DMX compatible
- RGB Controller not incl.

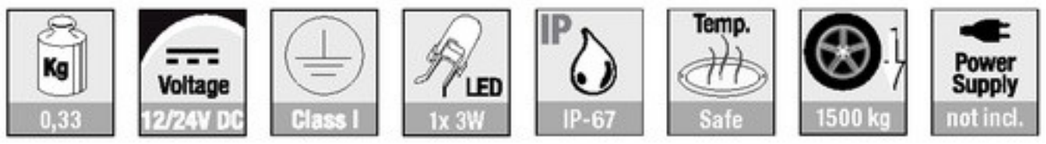


Montana-2WW — A0520111
1 x 1W 25° Warm White LED

Montana-2B — A0520112
1 x 1W 25° Blue LED

- Stainless steel trim
- Die cast aluminium housing
- Hi Power LED's
- Power & LED-driver
- 8 mm tempered glass
- PG-9 cable gland
- Power: 24V DC
- Incl. ABS housing sleeve

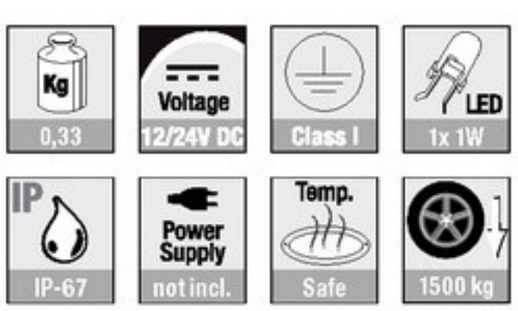

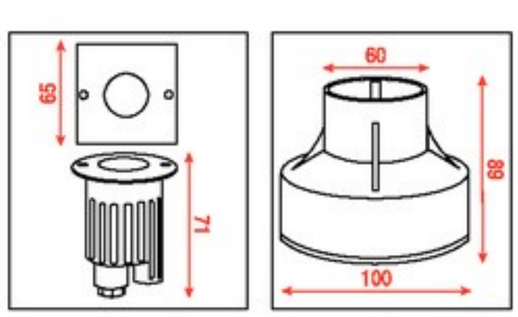

Montana-4RGB — A0520130
1 x 3W (3-in-one) 25° RGB LED

- Stainless steel trim
- Die cast aluminium housing
- Hi Power LED's
- Power & LED-driver
- 8 mm tempered glass
- PG-9 cable gland
- Power: 24V DC
- Incl. ABS housing sleeve
- DMX compatible
- RGB Controller not incl.









Monroe-21WW — A0520071

10 x 5 mm Warm White LED - 1 Light sector

- Die cast aluminium Trim
- Die cast aluminium housing
- Super bright LED's
- Power & LED-driver
- Clear PC shade
- Brass cable gland
- Included 50 cm cable
- Lifetime 100.000 H
- Power consumption 1,0W

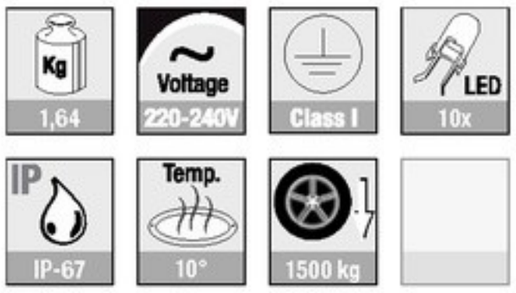

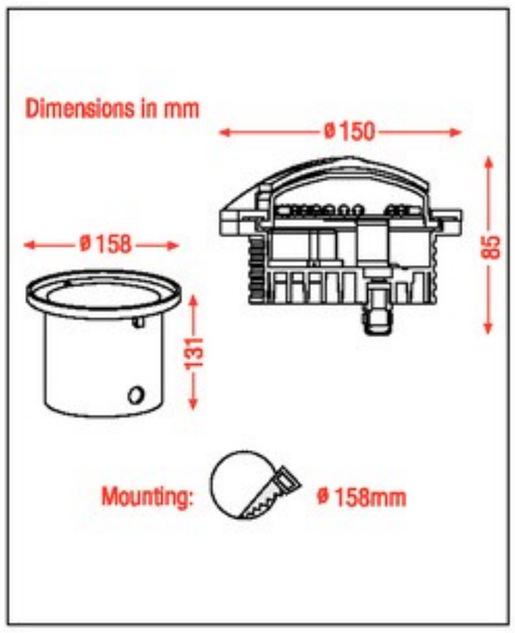





Monroe-22WW — A0520072

20 x 5 mm Warm White LED - 2 Light sectors

- Die cast aluminium Trim
- Die cast aluminium housing
- Super bright LED's
- Power & LED-driver
- Clear PC shade
- Brass cable gland
- Included 50 cm cable
- Lifetime 100.000 H
- Power consumption 1,5W

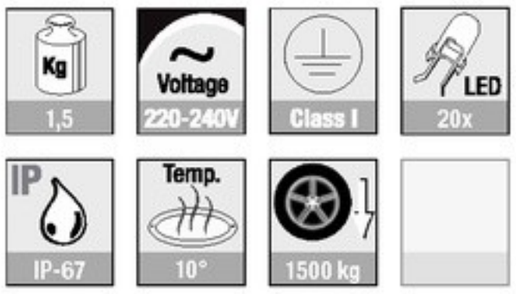

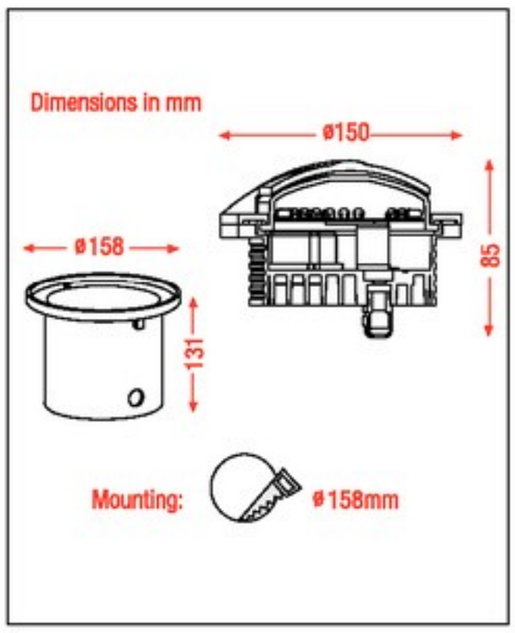





Monroe-23WW — A0520073

24 x 5 mm Warm White LED - 4 Light sectors

- Die cast aluminium Trim
- Die cast aluminium housing
- Super bright LED's
- Power & LED-driver
- Clear PC shade
- Brass cable gland
- Included 50 cm cable
- Lifetime 100.000 H
- Power consumption 1,6W

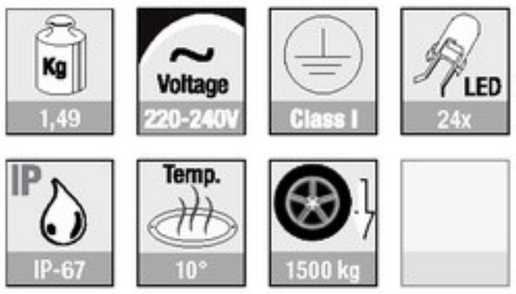

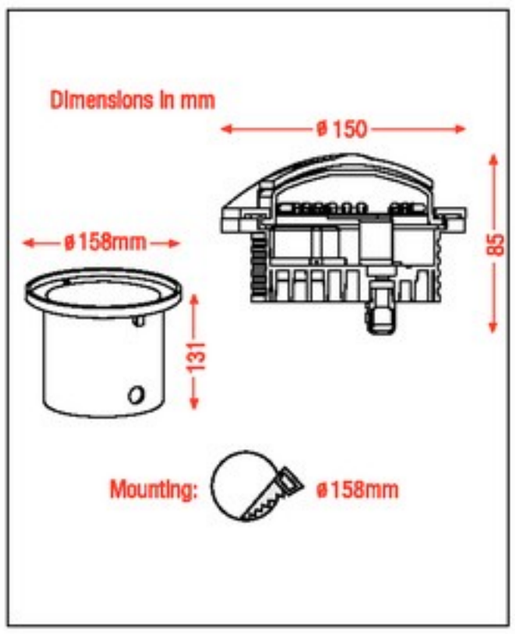


Inground spots



Visual by M.Bahnen, Highlite International B.V.

Inground spots

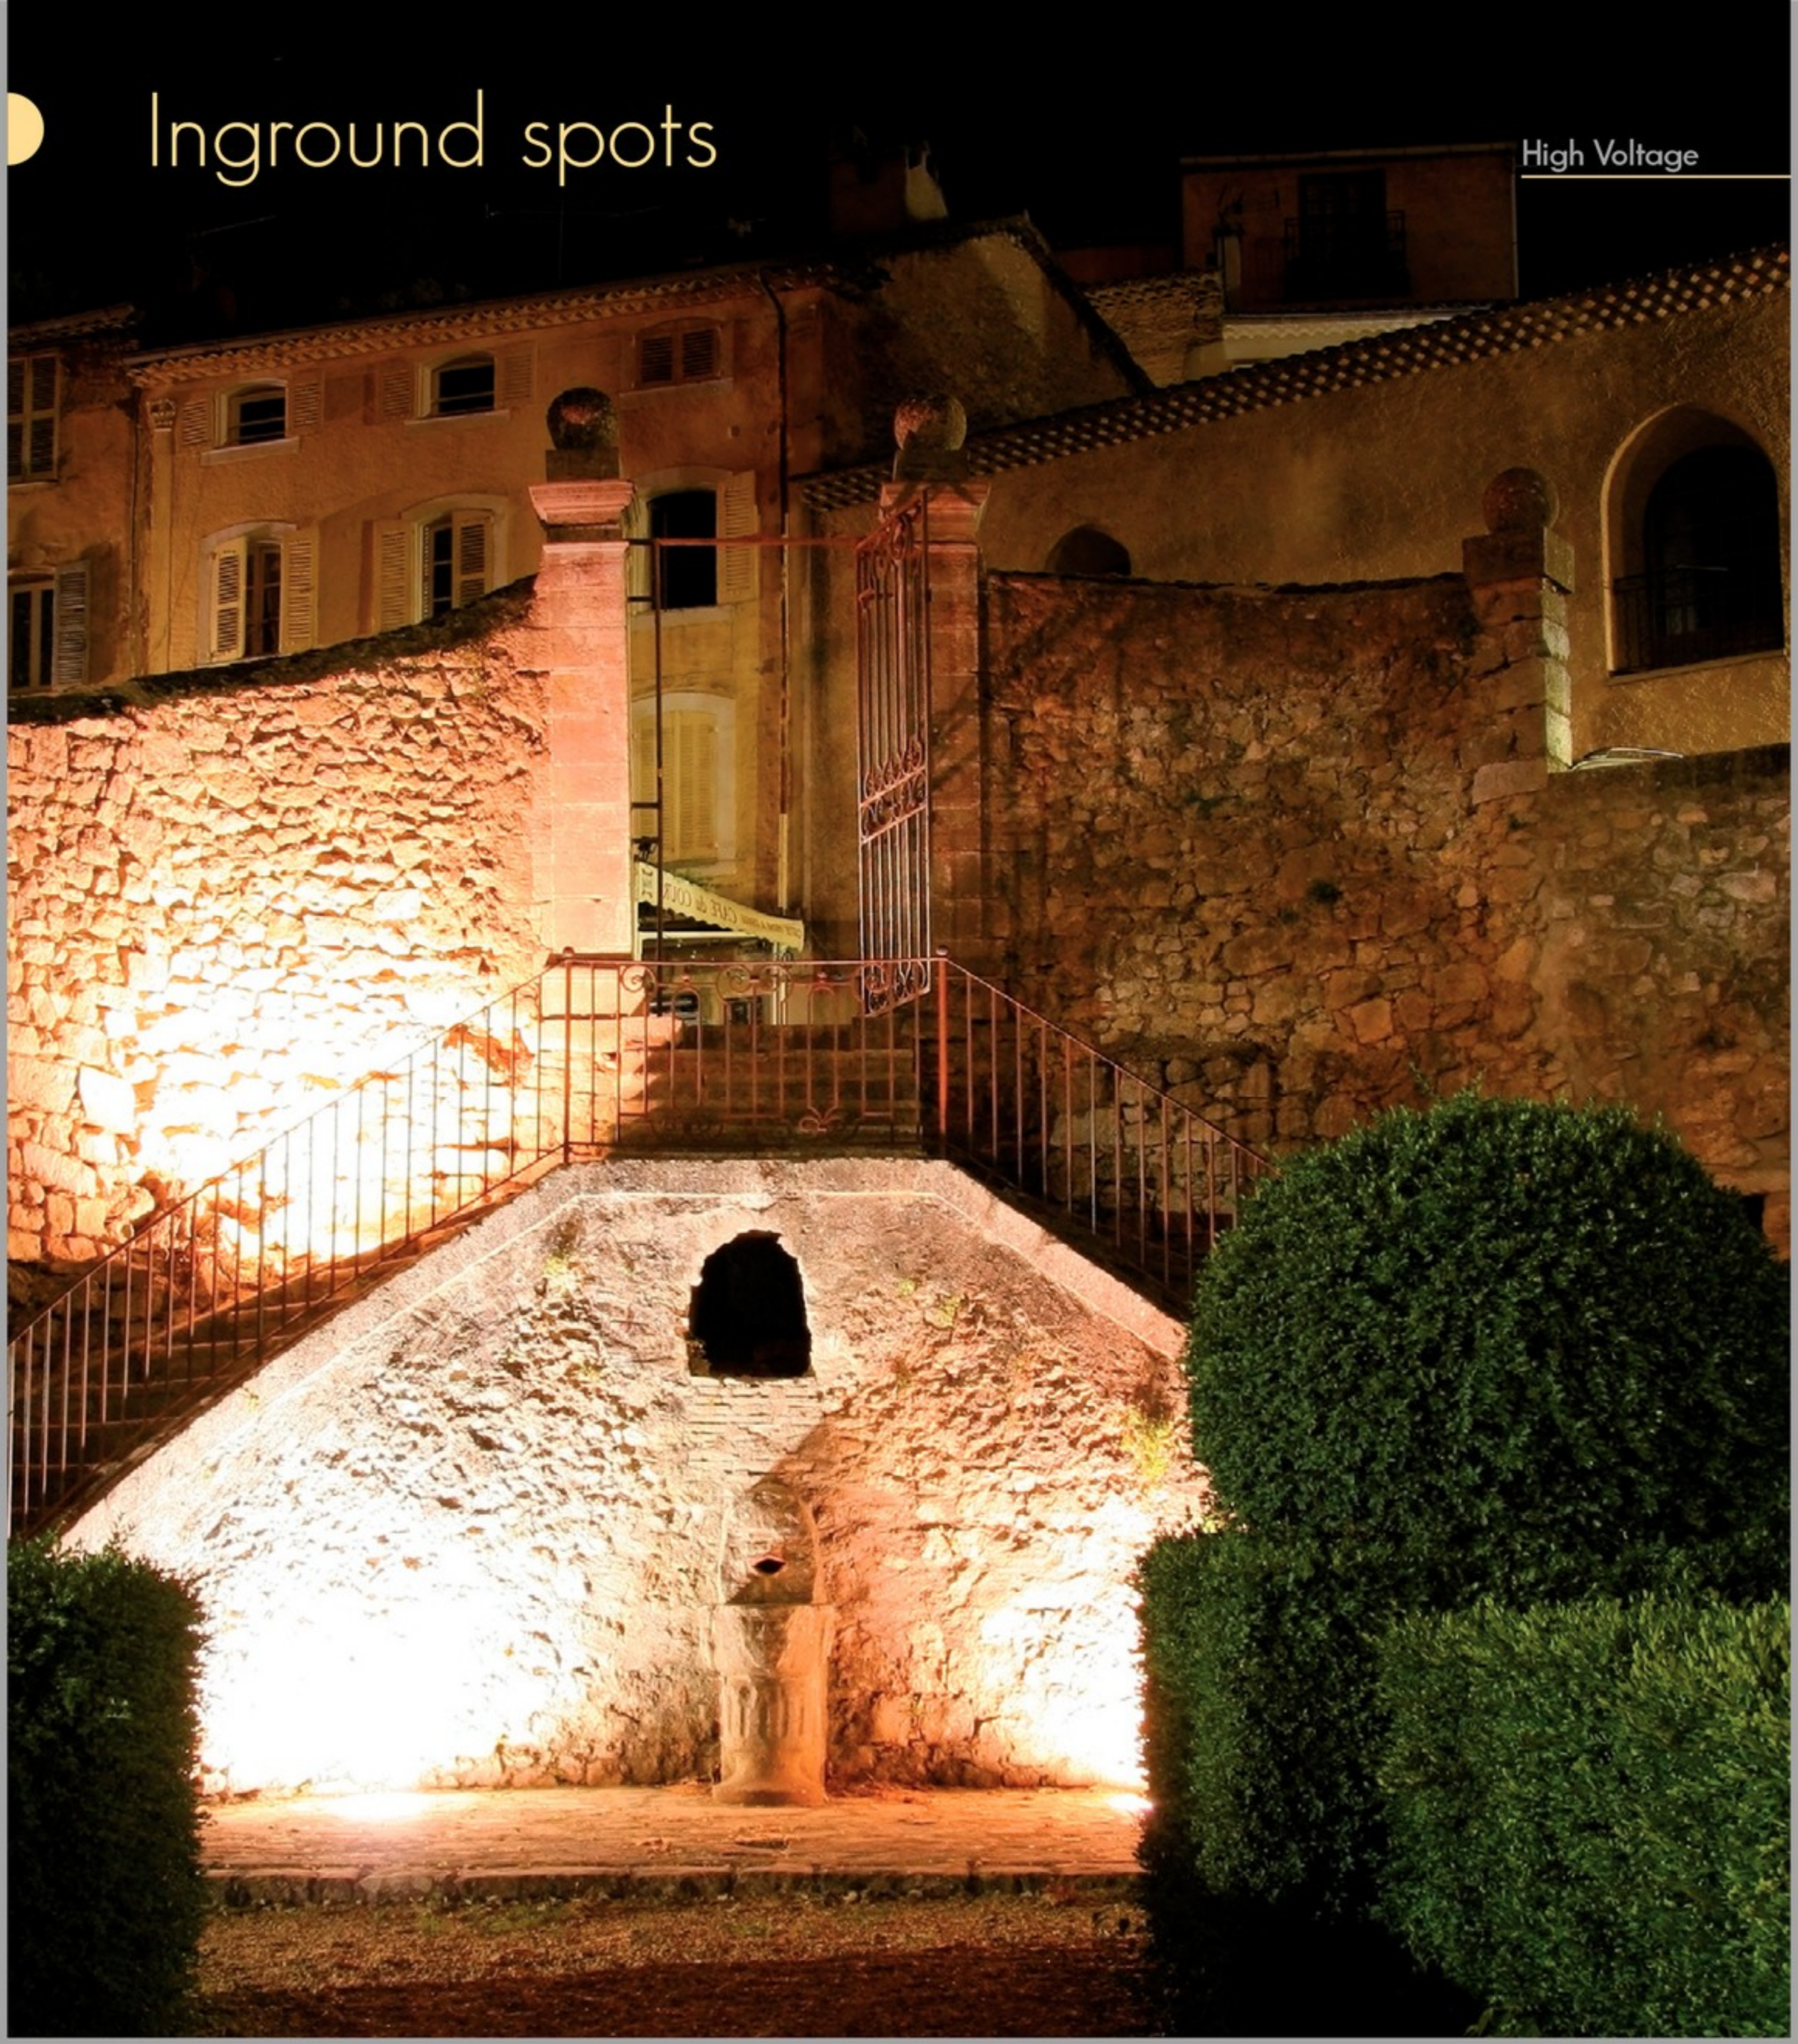


Inground spots

Vegas-1WW — A0520201
3 x 1W Warm White LED, 240V AC, 2700K

Vegas-3WW — A0520202
3 x 3W Warm White LED, 240V AC, 2700K

- Stainless steel 304 trim
- Die cast aluminium housing
- Hi Power LED's
- 6 mm tempered glass
- PG-9 cable gland
- Power: 240V AC
- Power RGB-version: 24V DC

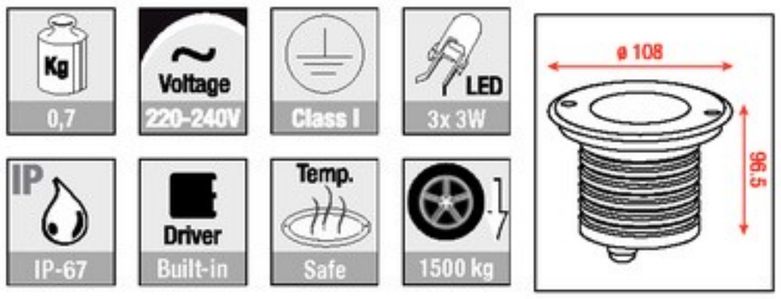




Dallas-7WW — A0520301
7 x 1W Warm White LED, 240V AC, 2700K

Dallas-21WW — A0520302
7 x 3W Warm White LED, 240V AC, 2700K

- Stainless steel 304 trim
- Die cast aluminium housing
- Hi Power LED's
- 6 mm tempered glass
- PG-9 cable gland
- Power: 240V AC
- Power RGB-version: 24V DC

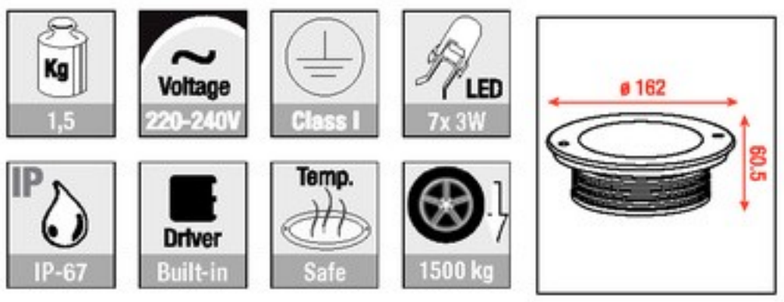




Utah-12WW — A0520401
12 x 1W Warm White LED, 240V AC, 2700K

Utah-36WW — A0520402
12 x 3W Warm White LED, 240V AC, 2700K

- Stainless steel 304 trim
- Die cast aluminium housing
- Hi Power LED's
- 6 mm tempered glass
- PG-9 cable gland
- Power: 240V AC
- Power RGB-version: 24V DC

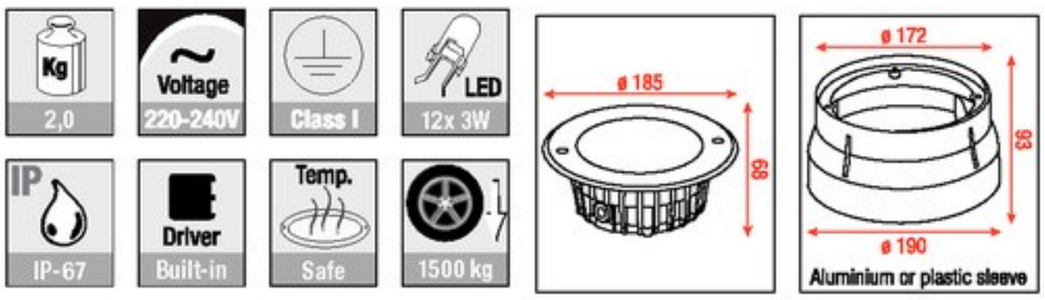






Victoria-WW — A0520451

10 x 0,1W Warm White LED - 2700K

Victoria-B — A0520452

10 x 0,1W Blue LED

- Stainless steel 304 trim
- Die cast aluminium housing
- Hi Power LED's
- LED-driver included
- 6 mm tempered glass
- PG-9 cable gland
- Power: 230V AC

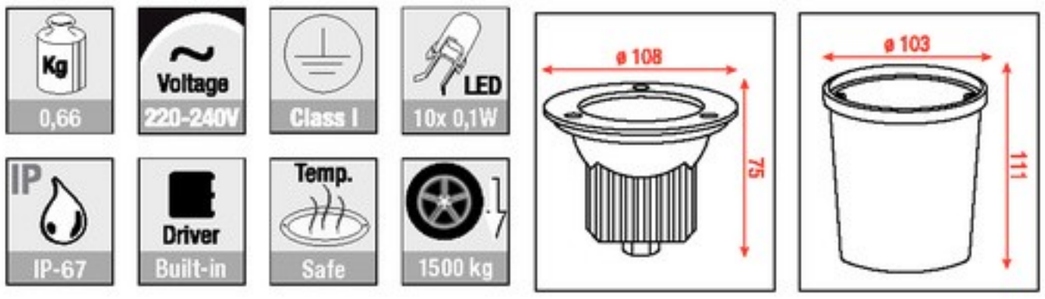




Ottawa-WW — A0520461

1 x 1W Warm White LED - 2700K

Ottawa-B — A0520462

1 x 1W Blue LED 2700K

- Stainless steel 304 trim
- Die cast aluminium housing
- Hi Power LED's
- LED-driver included
- 6 mm tempered glass
- PG-9 cable gland
- Power: 230V AC

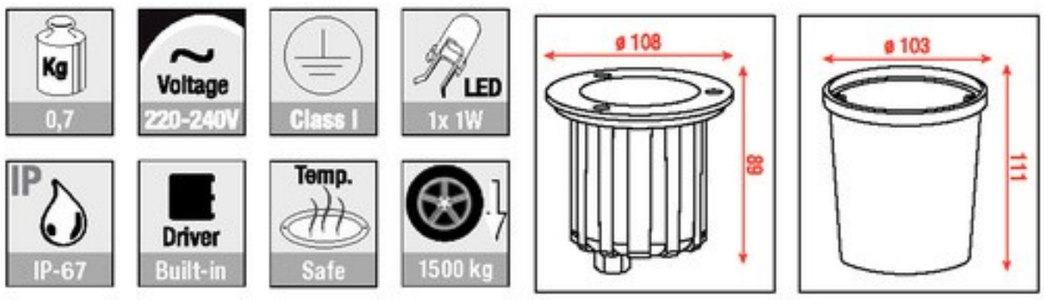




Calgary-WW — A0520471

1 x 3W Warm White LED - 2700K

- Stainless steel trim
- Die cast aluminium housing
- Hi Power LED's
- Power & LED-driver
- 6 mm tempered glass
- PG-9 cable gland
- Power: 230V AC

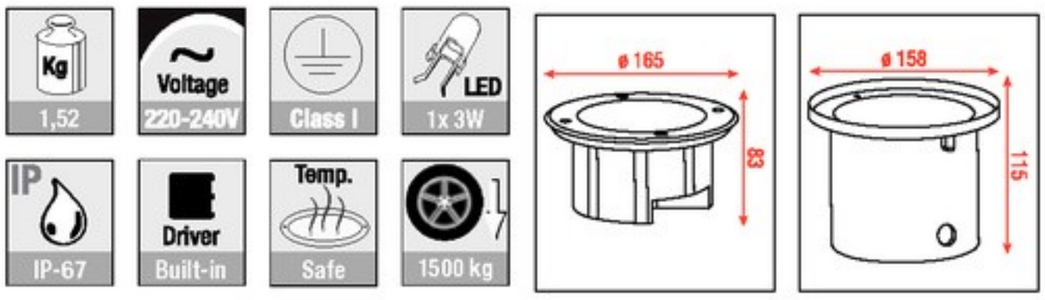

Inground spots



Inground spots




Inground spots

Tampa-1WW — A0520500

1 x 3W warm-white LED

- Light direction: direct
- Built-in LED driver
- Power consumption: 1,3W
- Housing: Stainless steel 316L
- Dimensions fixture: ø80 x 113 mm

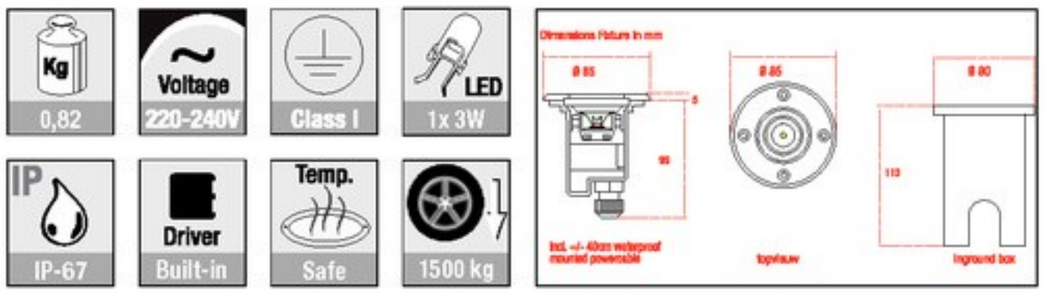




Tampa-3WW — A0520501

3 x 1W warm-white LED

- Light direction: direct
- Built-in LED driver
- Power consumption: 4W
- Housing: Stainless steel 316L
- Dimensions fixture: ø105 x 127 mm

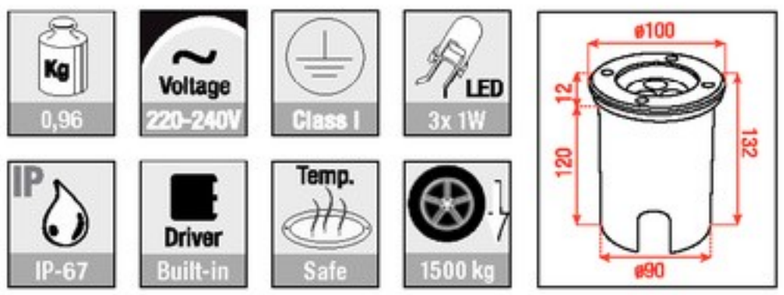

Adjustable!






Tampa-6WW — A0520502

6 x 1W warm-white LED

- Light direction: direct
- Built-in LED driver
- Power consumption: 8W
- Housing: Stainless steel 316L
- Dimensions fixture: ø125 x 173 mm

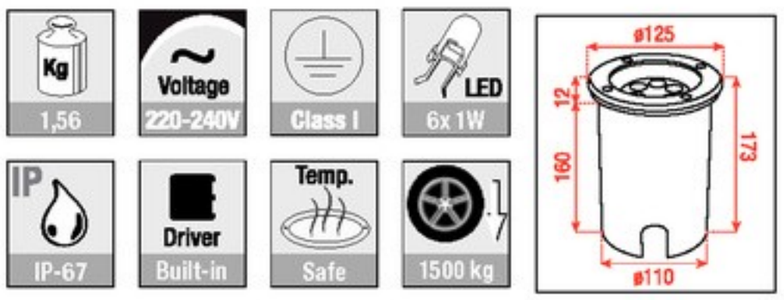

Adjustable!







Inground spots

ColourGround 36

A0520430

- Voltage: AC100~240V...50/60Hz
- Rated Power: 43W
- IP: IP67 Protection Rating
- LED/unit: 36pcs (12 x Red / 12 x Green / 12 x Blue)
- Output/LED: 3W
- Environment Temp.: -20 ~40°C
- Cooling: Direct air convection
- Dimensions: ø320 x 146mm
- Weight: 8 kg



ColourGround 12T

A0520435

- Voltage: AC100~240V...50/60Hz
- Rated Power: 46W
- IP: IP67 Protection Rating
- LED/Unit: 12pcs (tri-color)
- Output/LED: 3W
- Environment Temp.: -20 ~40C
- Cooling: Direct air convection
- Dimensions: ø320 x 146mm
- Weight: 8 kg



DMX Coder

for ColorWall serie

42635

Power: Battery. 3V DC
Functions: DMX / Personality / Calibration / Dimmer Setting
Dimensions: 110 x 70 x 28 mm
Weight: 0,2 kg



Underwater lights

LED TECHNOLOGY




Salzburg-1WW


A0620010

1 x 3W Warm-White LED 12-24V DC



- Lamptype: 1x 3W 30° Warm-white LED
- Excluded LED-driver
- Power consumption: 4W
- Housing: Stainless steel 304
- Trim: Stainless steel 316
- Weight: 0,6 kg
- Dimensions fixture: ø67,5 x 72,5 mm
- Classification: IP-68 Class I

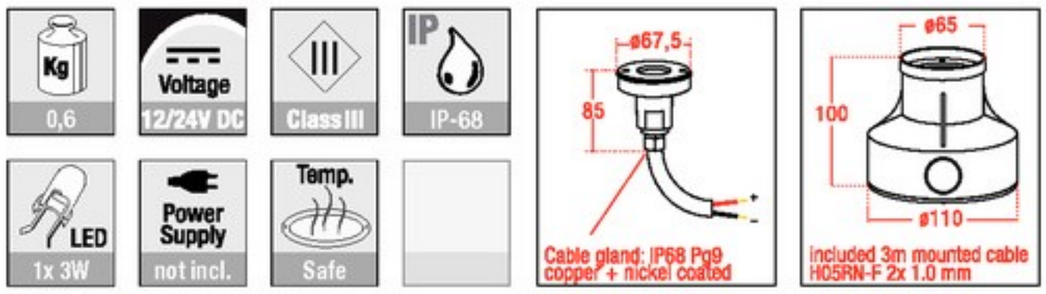

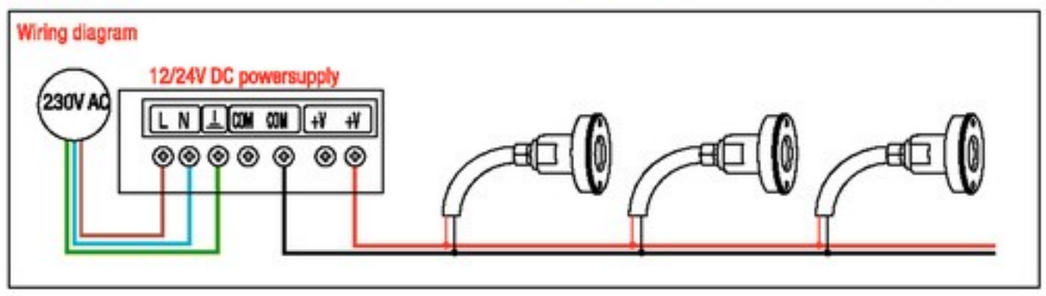




Salzburg-1RGB


A0620013

1 x 3W RGB LED 24V DC




- Lamptype: 1x 3W 30° RGB-in-one LED
- Included: built-in 24V constant voltage LED-driver
- Power consumption: 4W
- Housing: Stainless steel 304
- Trim: Stainless steel 316
- Weight: 0.6 kg
- Dimensions fixture: ø67,5 x 72,5 mm
- Included waterproof mounted LED-driver & 3m connection cable
- Classification: IP-68 Class I
- Including mounting box
- RGB Controller not incl.

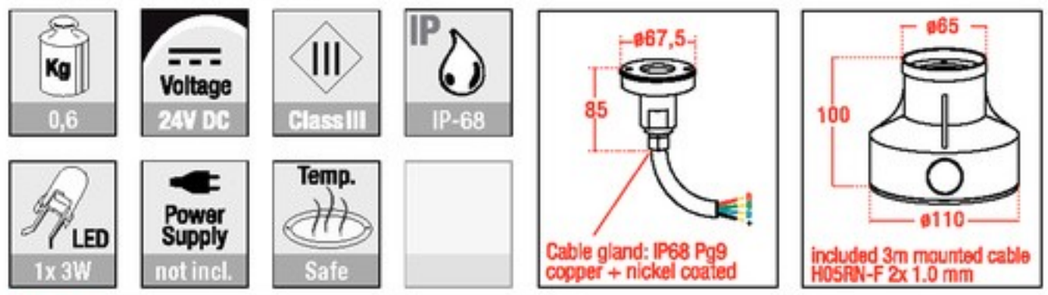

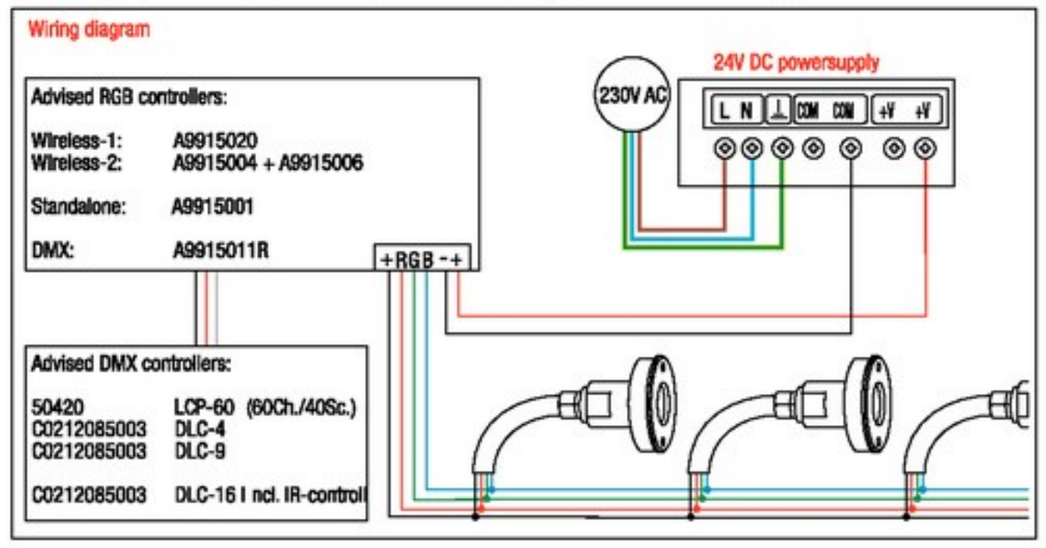

Underwater lights

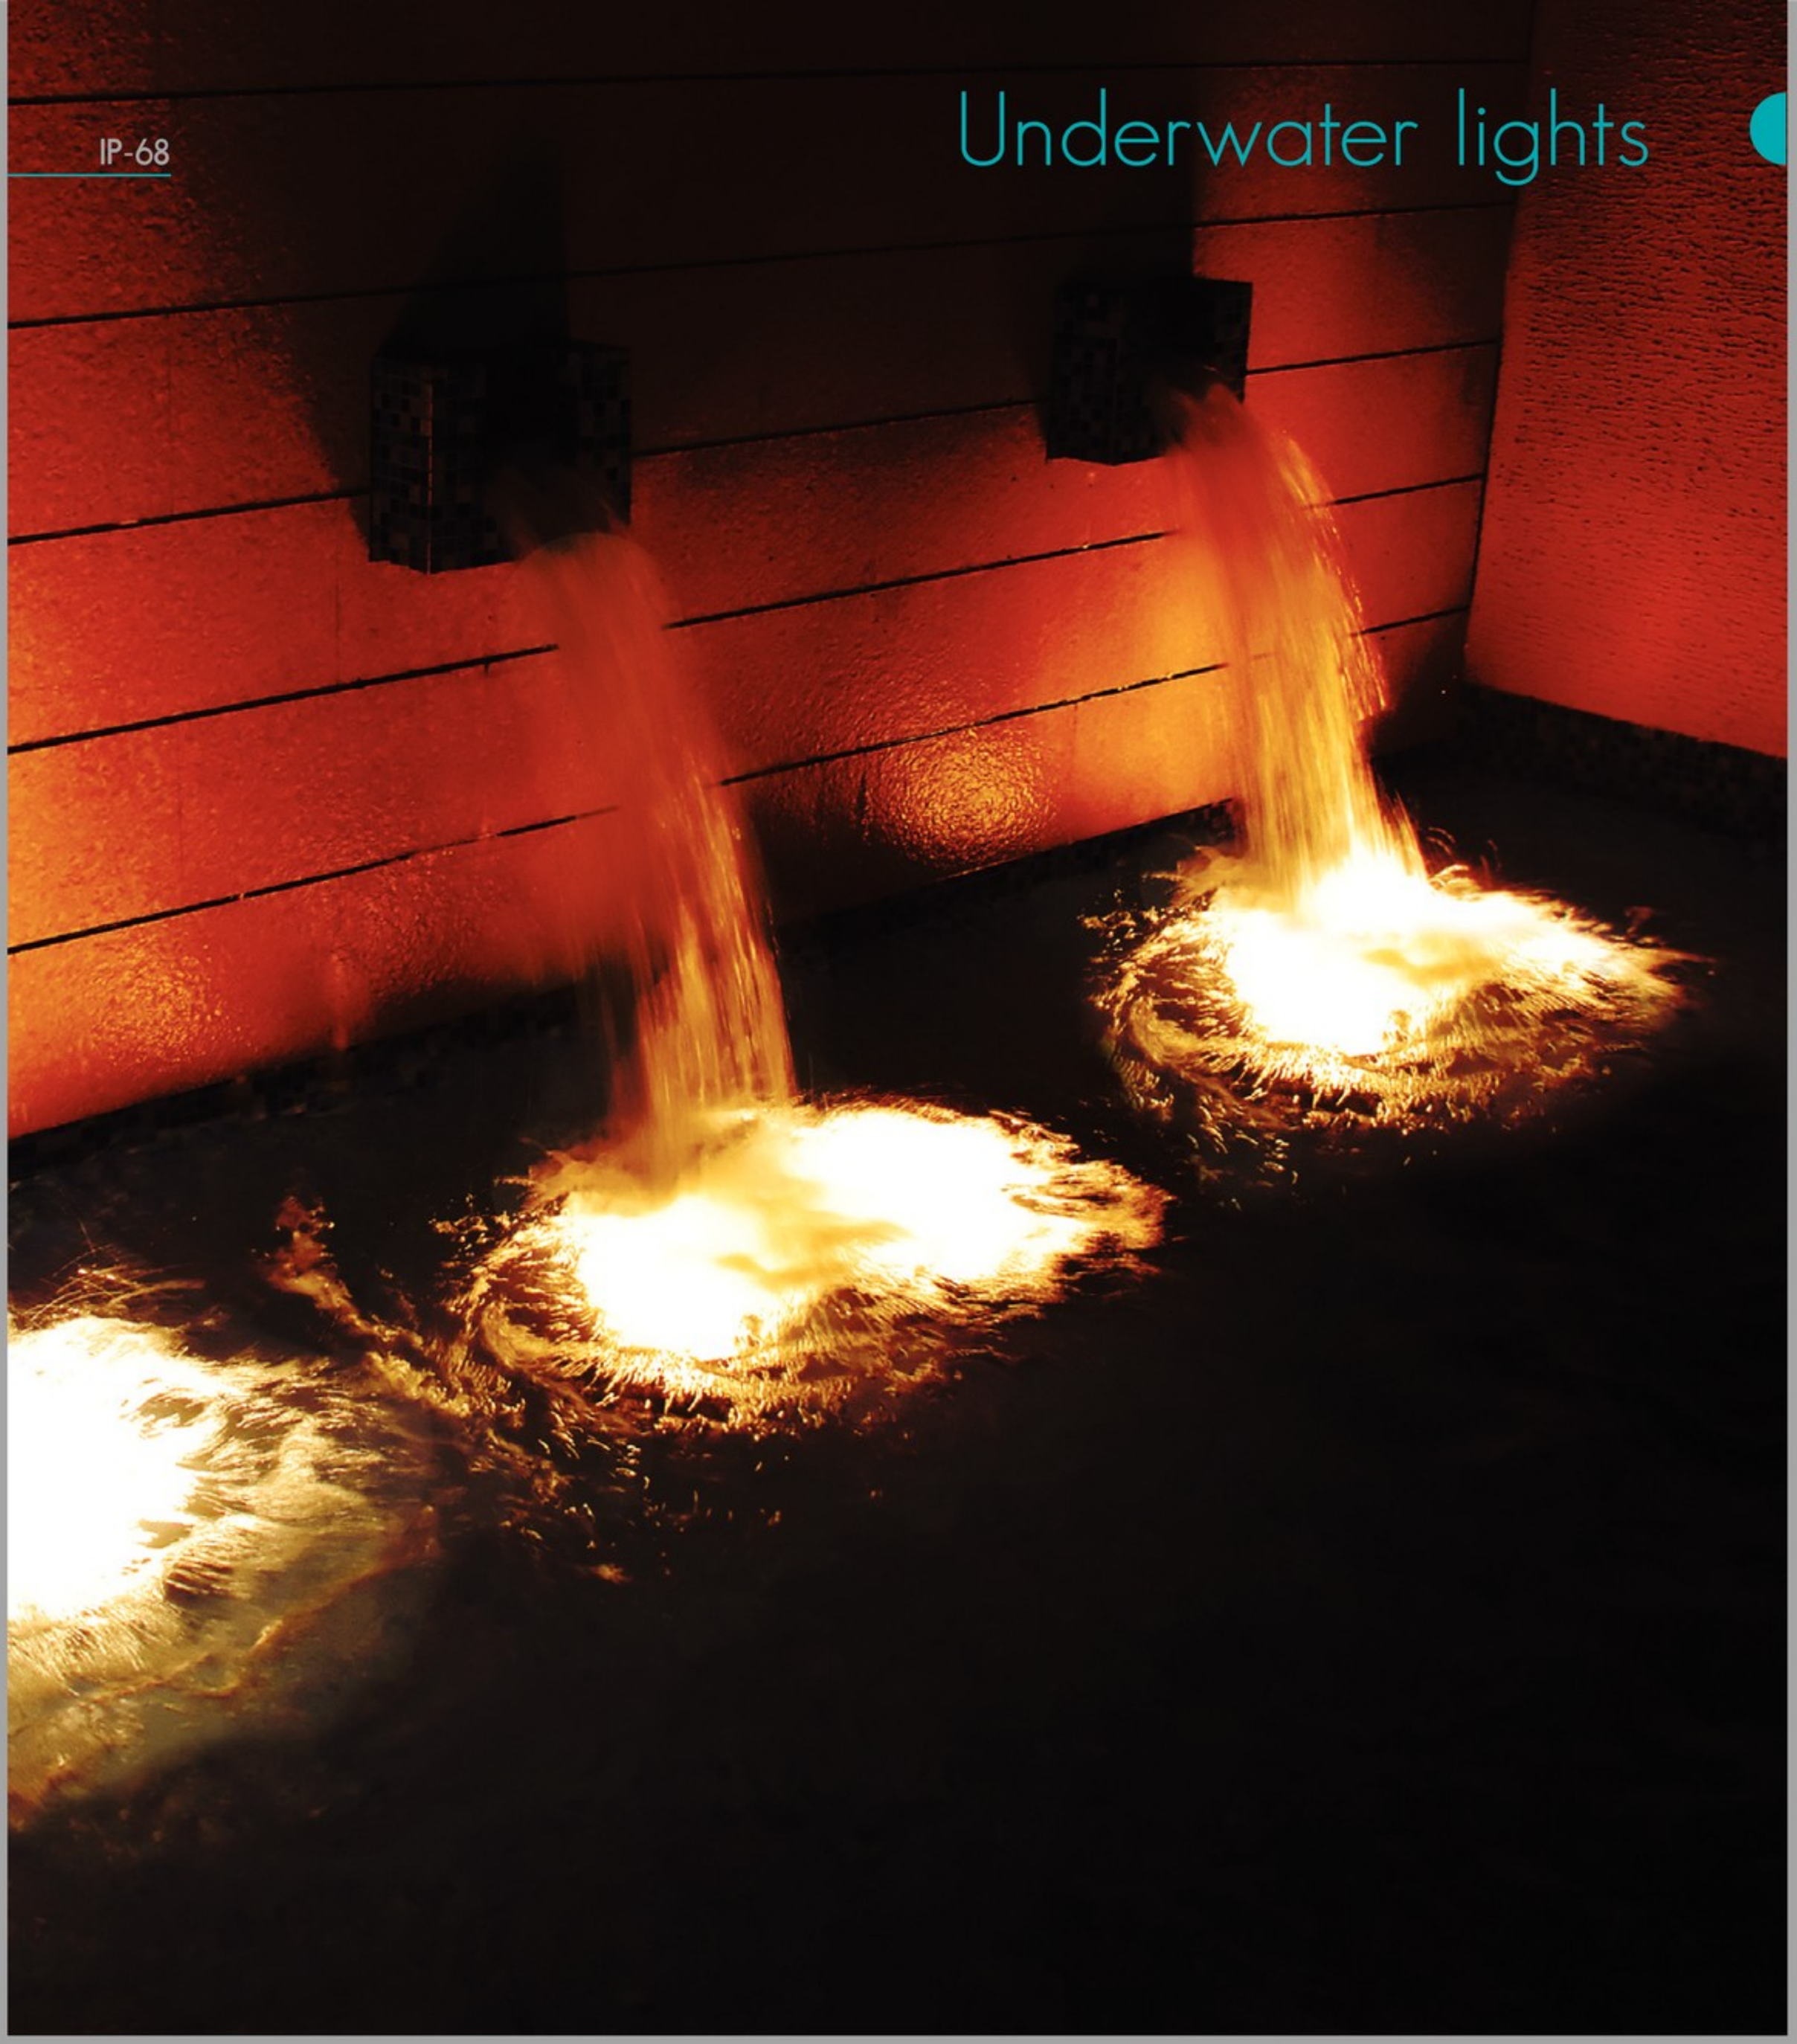

Underwater lights

IP-68




Underwater lights

Salzburg-7WW — A0620020
7 x 1W Warm White LED 12-24V DC

Salzburg-7B — A0620021
7 x 1W Blue LED 12-24V DC

- Stainless steel trim 316
- Stainless steel housing 304
- Hi Power LED's
- Excluded LED-driver
- 5 mm tempered glass
- PG-9 cable gland
- Install. depth: max. 0.6 m
- LED Beam angle 25°
- Lifetime/H: 50.000

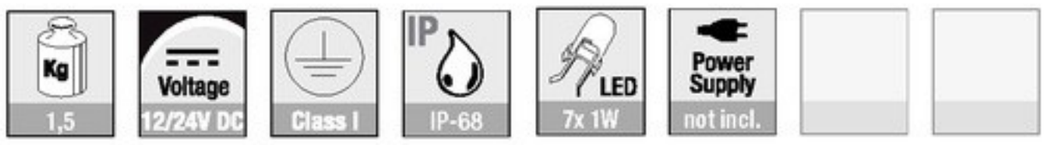




Cover Grill A0620000 for Salzburg ø152 mm



Salzburg-9WW — A0620030
9 x 1W Warm White LED 12-24V DC

Salzburg-9B — A0620031
9 x 1W Blue LED 12-24V DC

- Stainless steel trim 316
- Stainless steel housing 304
- Hi Power LED's
- Excluded LED-driver
- 5 mm tempered glass
- PG-9 cable gland
- Install. depth: max. 0,6 m
- LED Beam angle 25°
- Lifetime/H: 50.000

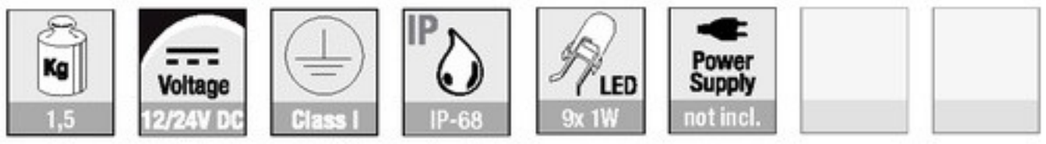



A0620043, A0620044




A0620030



A0620031


Salzburg-RGB — A0620043
9 x 1W RGB (3 in-one) LED 24V DC

- Stainless steel trim 316
- Stainless steel housing 304
- Hi Power LED's
- Power & LED-driver
- 5 mm tempered glass
- PG-9 cable gland
- Install. depth: max. 0,6 m
- LED Beam angle 25°
- Lifetime/H: 50.000
- RGB Controller not incl.

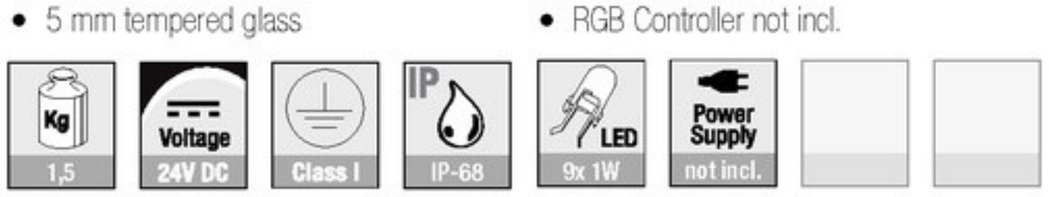


Salzburg-3RGB — A0620044
9 x 3W RGB (3 in-one) LED 24V DC

- Stainless steel trim 316
- Stainless steel housing 304
- Hi Power LED's
- Power & LED-driver
- 5 mm tempered glass
- PG-9 cable gland
- Install. depth: max. 0,6 m
- LED Beam angle 25°
- Lifetime/H: 50.000
- RGB Controller not incl.

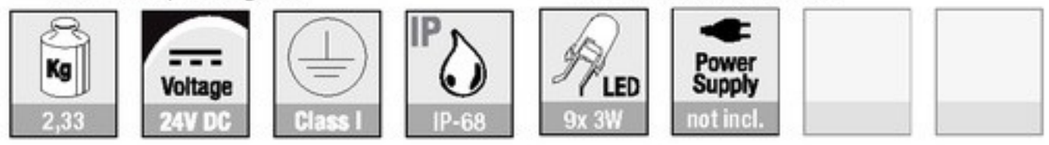

Dimensions for all versions on this page:

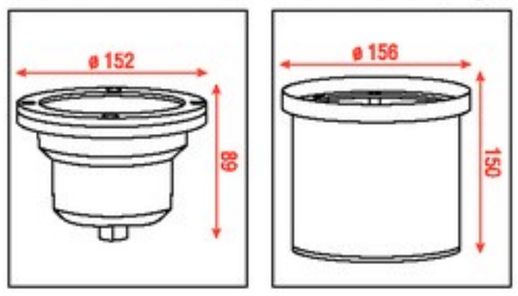


Underwater lights



Ibiza-6WW — A0620050

6 x 1W Warm White LED 24V DC

- Stainless steel trim 316
- Stainless steel housing 304
- Hi Power LED's
- Power & LED-driver
- 5 mm tempered glass
- PG-9 cable gland
- Install. depth: max. 0,6 m
- LED Beam angle: 45°
- Lifetime/H: 50.000
- Bracket: Optional

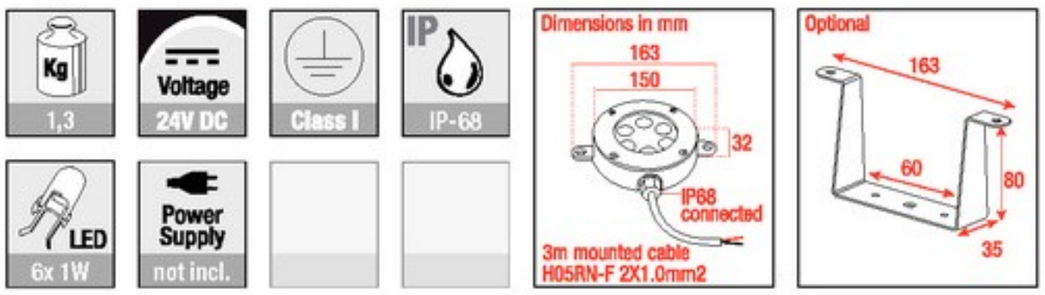




Ibiza-6B — A0620051

6 x 1W Blue LED 24V DC

- Stainless steel trim 316
- Stainless steel housing 304
- Hi Power LED's
- Power & LED-driver
- 5 mm tempered glass
- PG-9 cable gland
- Install. depth: max. 0.6 m
- LED Beam angle: 45°
- Lifetime/H: 50.000
- Bracket: Optional

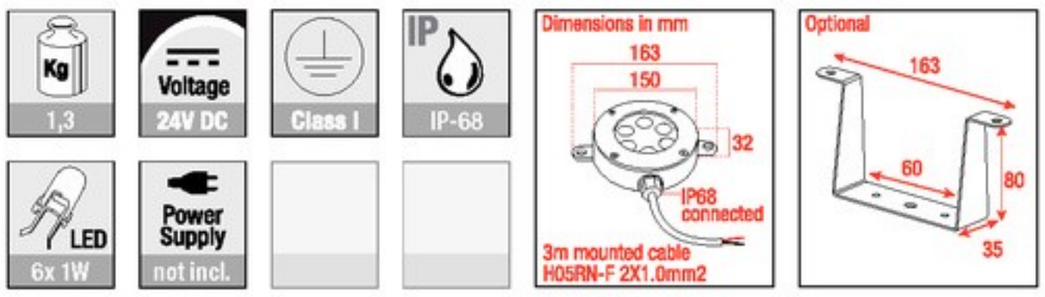




Ibiza-6RGB — A0620063

6 x 1W RGB LED 24V DC

- Stainless steel trim 316
- Stainless steel housing 304
- Hi Power LED's
- Power & LED-driver
- 5 mm tempered glass
- PG-9 cable gland
- Install. depth: max. 0.6 m
- LED Beam angle 45°
- Lifetime/H: 50.000
- RGB Controller not incl.
- Bracket: Optional

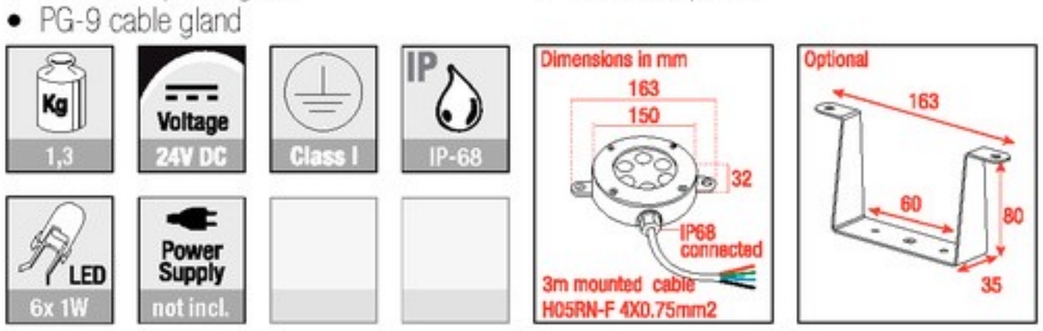




Ibiza-6RGB — A0620064

6 x 1W RGB (3 in-one) LED 24V DC

- Stainless steel trim 316
- Stainless steel housing 304
- Hi Power LED's
- Power & LED-driver
- 5 mm tempered glass
- PG-9 cable gland
- Install. depth: max. 0,6 m
- LED Beam angle 45°
- Lifetime/H: 50.000
- RGB Controller not incl.
- Bracket: Optional

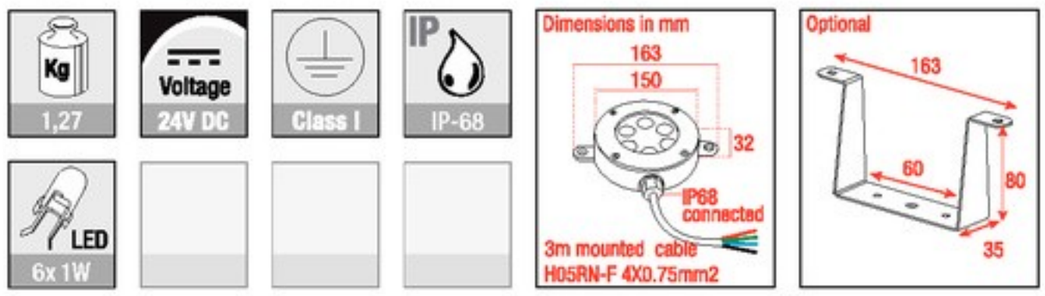

Underwater lights



Underwater lights

IP-68




Underwater lights

Dubai-1RGB

A0620072

9 x 3W RGB

- LED beam angle: 25°
- Input Voltage: 24V DC
- Power consumption: 21,5W
- Thread: M48 x 2,5 mm
- Dimensions Ø: 160 mm
- +Stainless steel trim
- RGB Controller not incl.

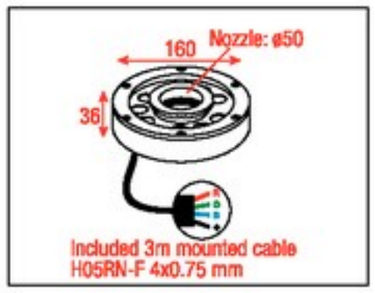




Kg 1,78 | Voltage 24V DC | Class III | IP-68 | LED 9x 3W | Temp. Safe

Dubai-2RGB

A0620074

9 x 3W RGB in one

- LED beam angle: 25°
- Input Voltage: 24V DC
- Power consumption: 21,5W
- Thread: M48 x 2,5 mm
- Dimensions Ø: 160 mm
- RGB Controller not incl.

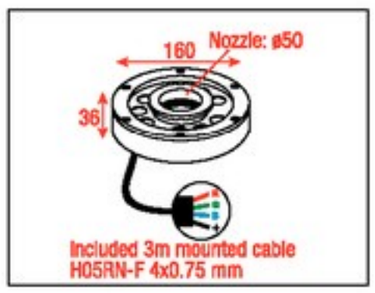




Kg 1,78 | Voltage 24V DC | Class III | IP-68 | LED 9x 3W | Temp. Safe




24V DC **Essex-5WW** **A0720006**

5 x 1W Warm White LED


- Hi-power LED, beam angle: 25°- (RGB 45°)
- Opto LED symbiosis for peak 1m
- Input Voltage: 24VDC
- Power consumption 1W version: 5,4W
- Power consumption 3W version: 14,5W
- Cable- H05RR-F 2 x 0,75 mm L= 50 cm (White)
- Cable- H05RR-F 4 x 0,75 mm L= 50 cm (RGB)
- RoHS compliant materials

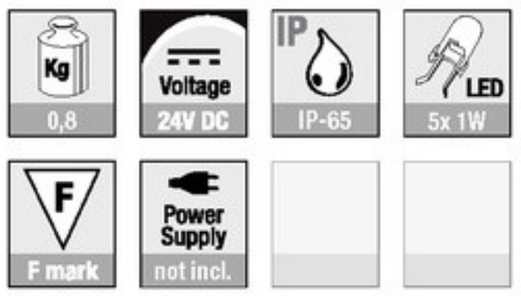

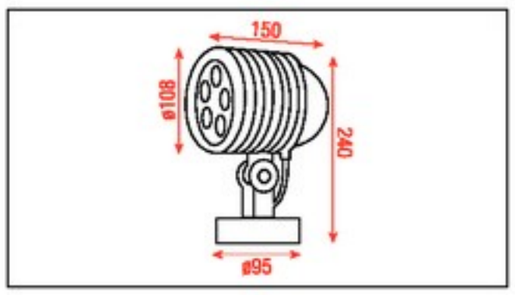

24V DC **Essex-15WW** **A0720007**


5 x 3W Warm White LED

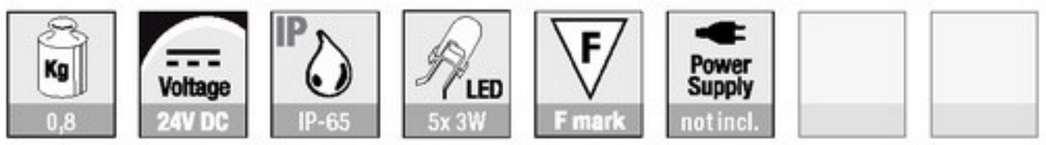

24V DC **Essex-15RGB** **A0720008**

5 x 3W RGB-in-one LED




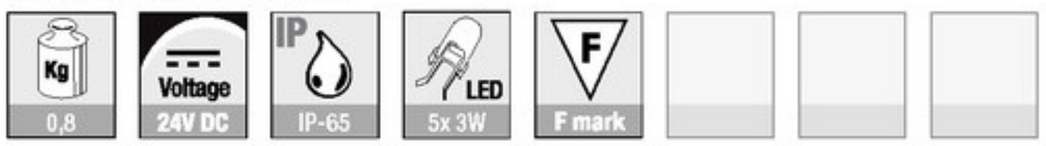



220V AC **Essex2-15WW** **A0720009**

5 x 3W Warm White LED

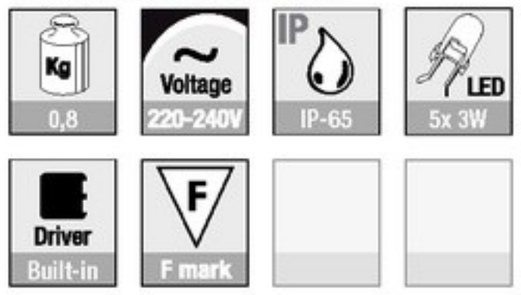


- Housing: Die cast Aluminum black powder coated
- Diffuser: 3 mm tempered glass
- Screws: stainless steel
- Gasket: Silicone rubber
- Weight: 0.8 Kg
- Dimensions: 150 x Ø108 mm
- Classification: IP-65

A9930002

Garden spike for Essex

Garden and streetlights

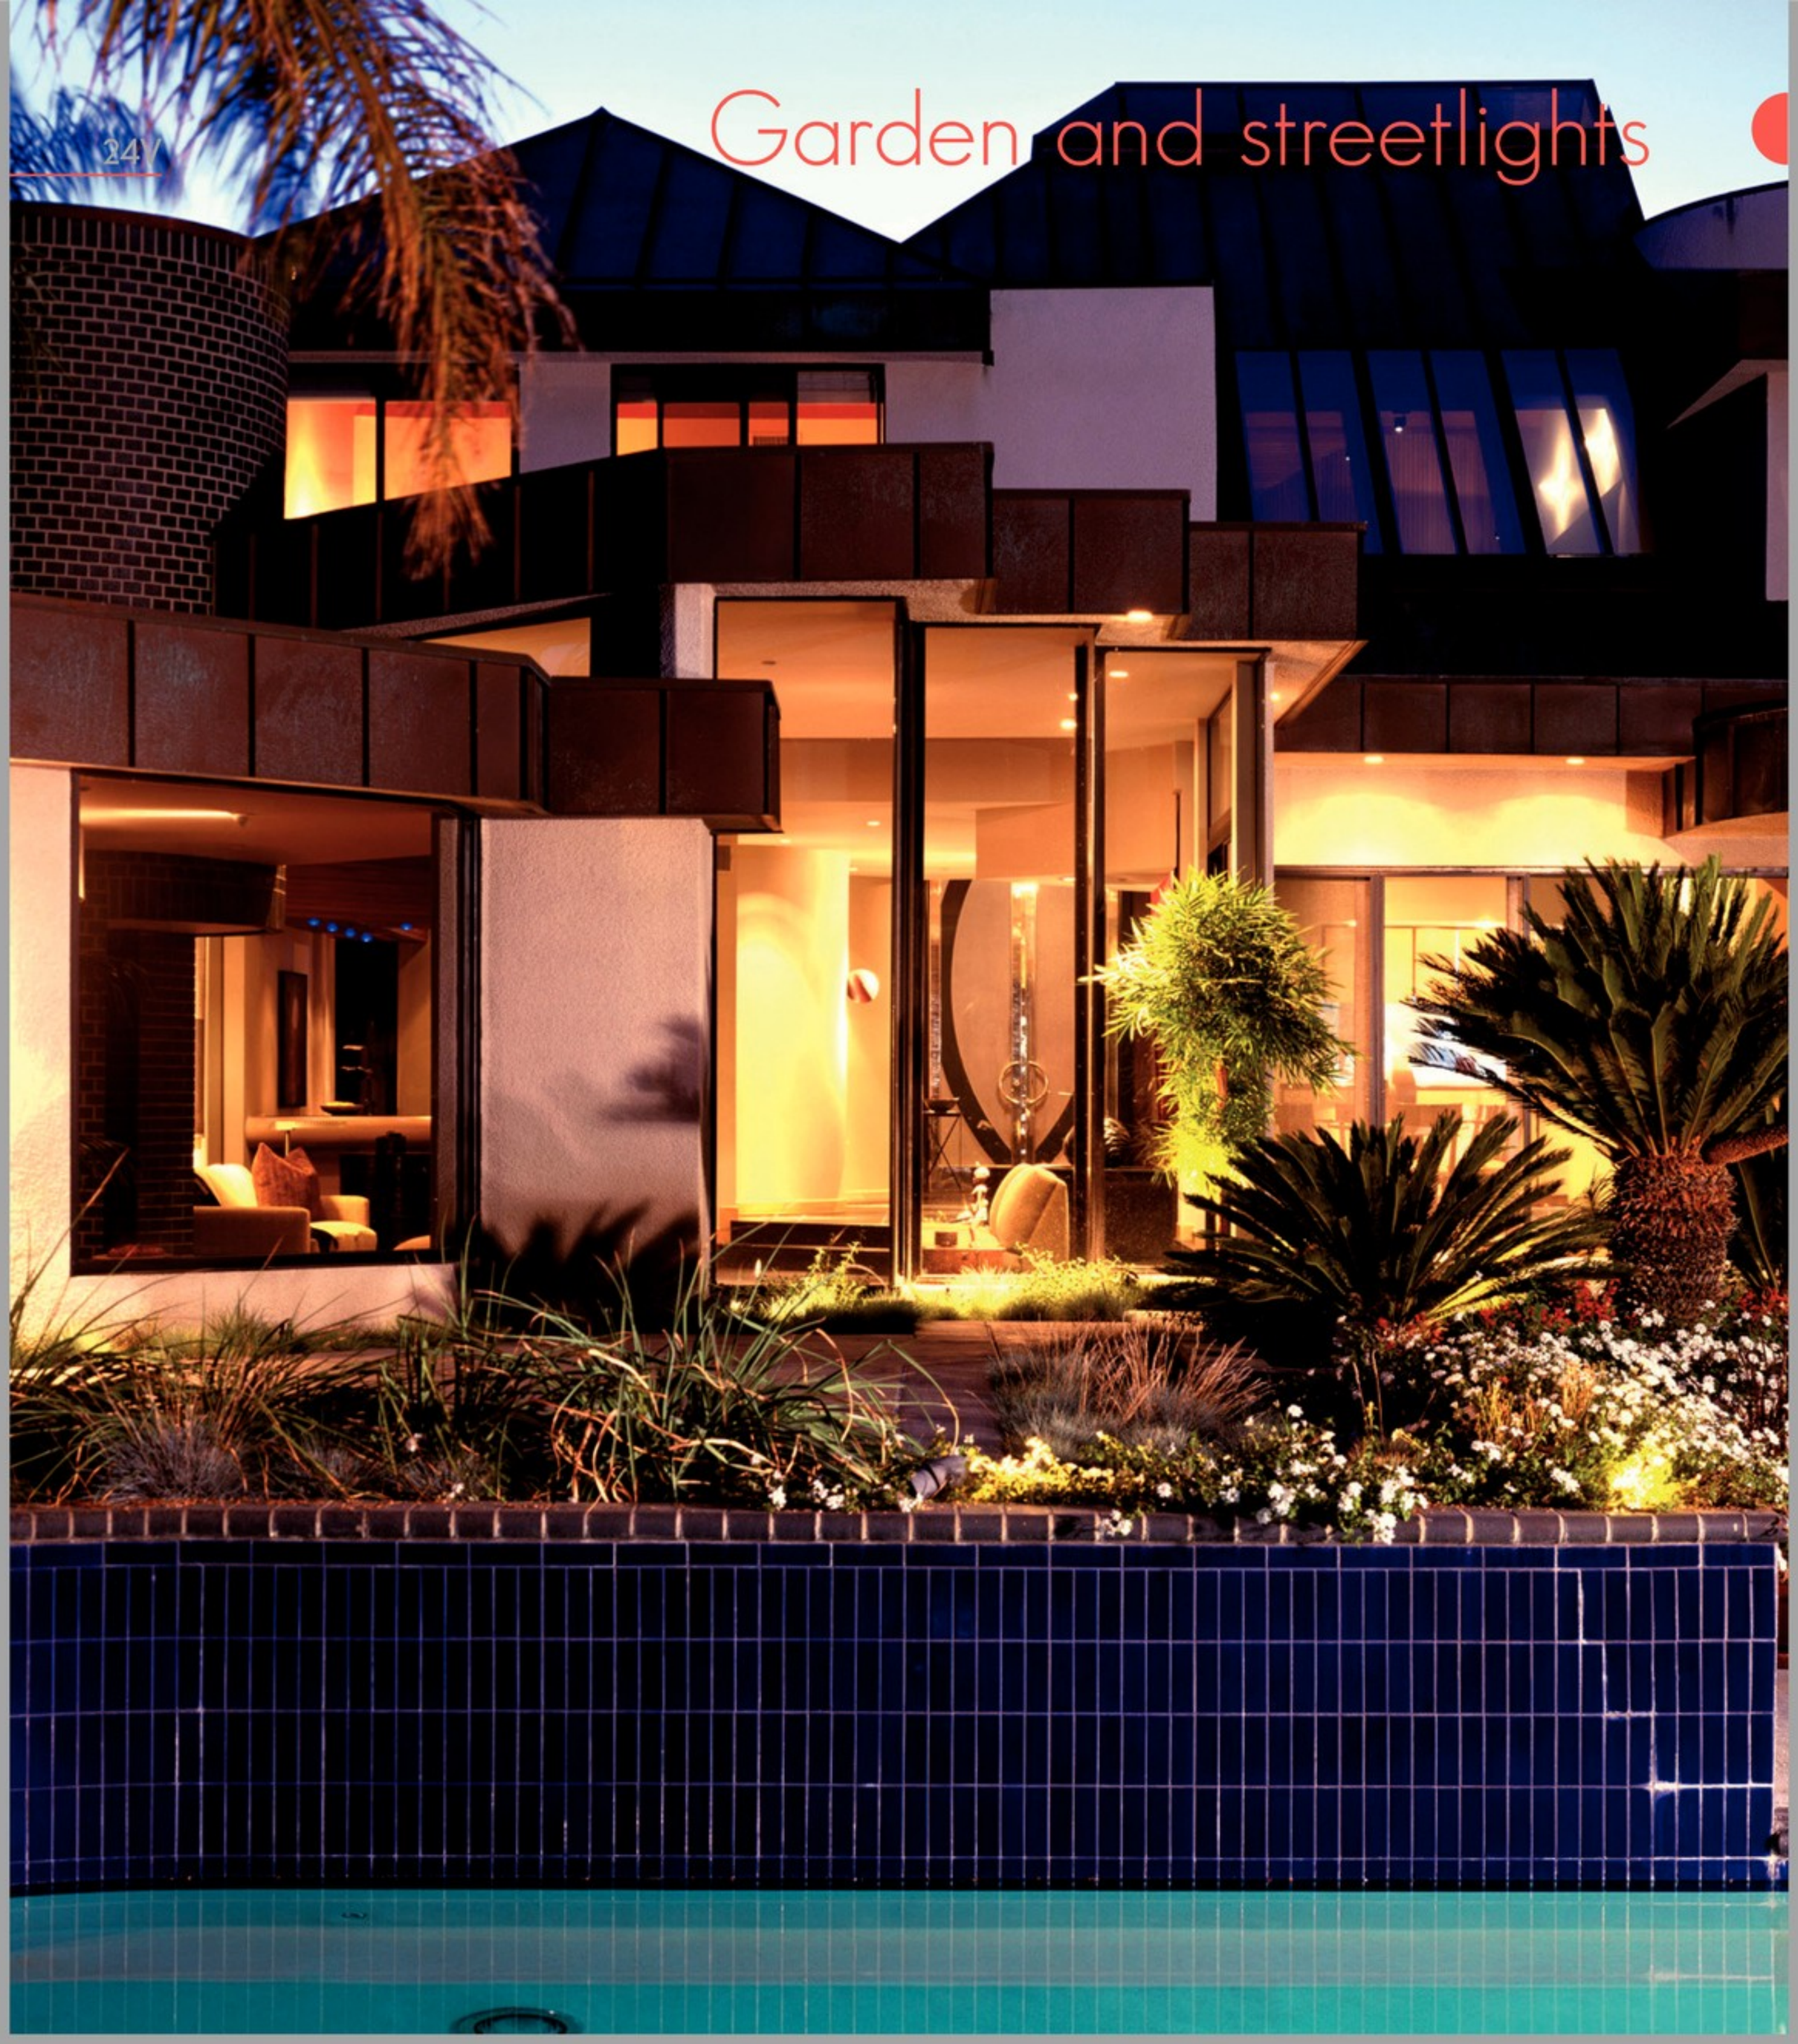

Garden and streetlights



A0720013 A0720014 A0720015 A0720016 A0720017



Cardiff-R **A0720013**
50 x 5 mm Red LED's


Cardiff-G **A0720014**
50 x 5 mm Green LED's


Cardiff-B **A0720015**
50 x 5 mm Blue LED's

Cardiff-Y **A0720016**
50 x 5 mm Yellow LED's


Cardiff-WW **A0720017**
50 x 5 mm Warm White LED's

- Super bright LED, beam angle: 30°
- Input Voltage: 230V~AC
- Power consumption: 2,5W
- Cable- H05RR-F 2 x 0,75 mm L= 50 cm
- RoHS compliant materials
- Included Garden-Spike 0,33 kg

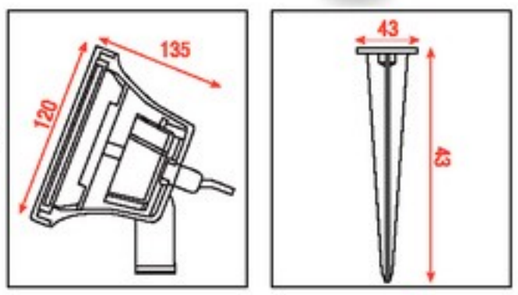

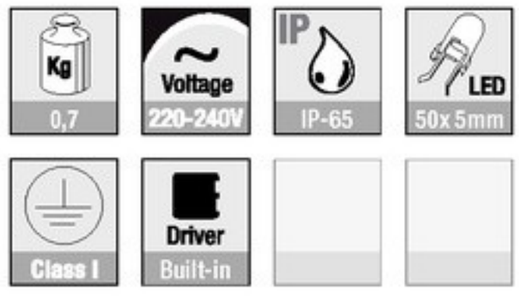

Garden and streetlights

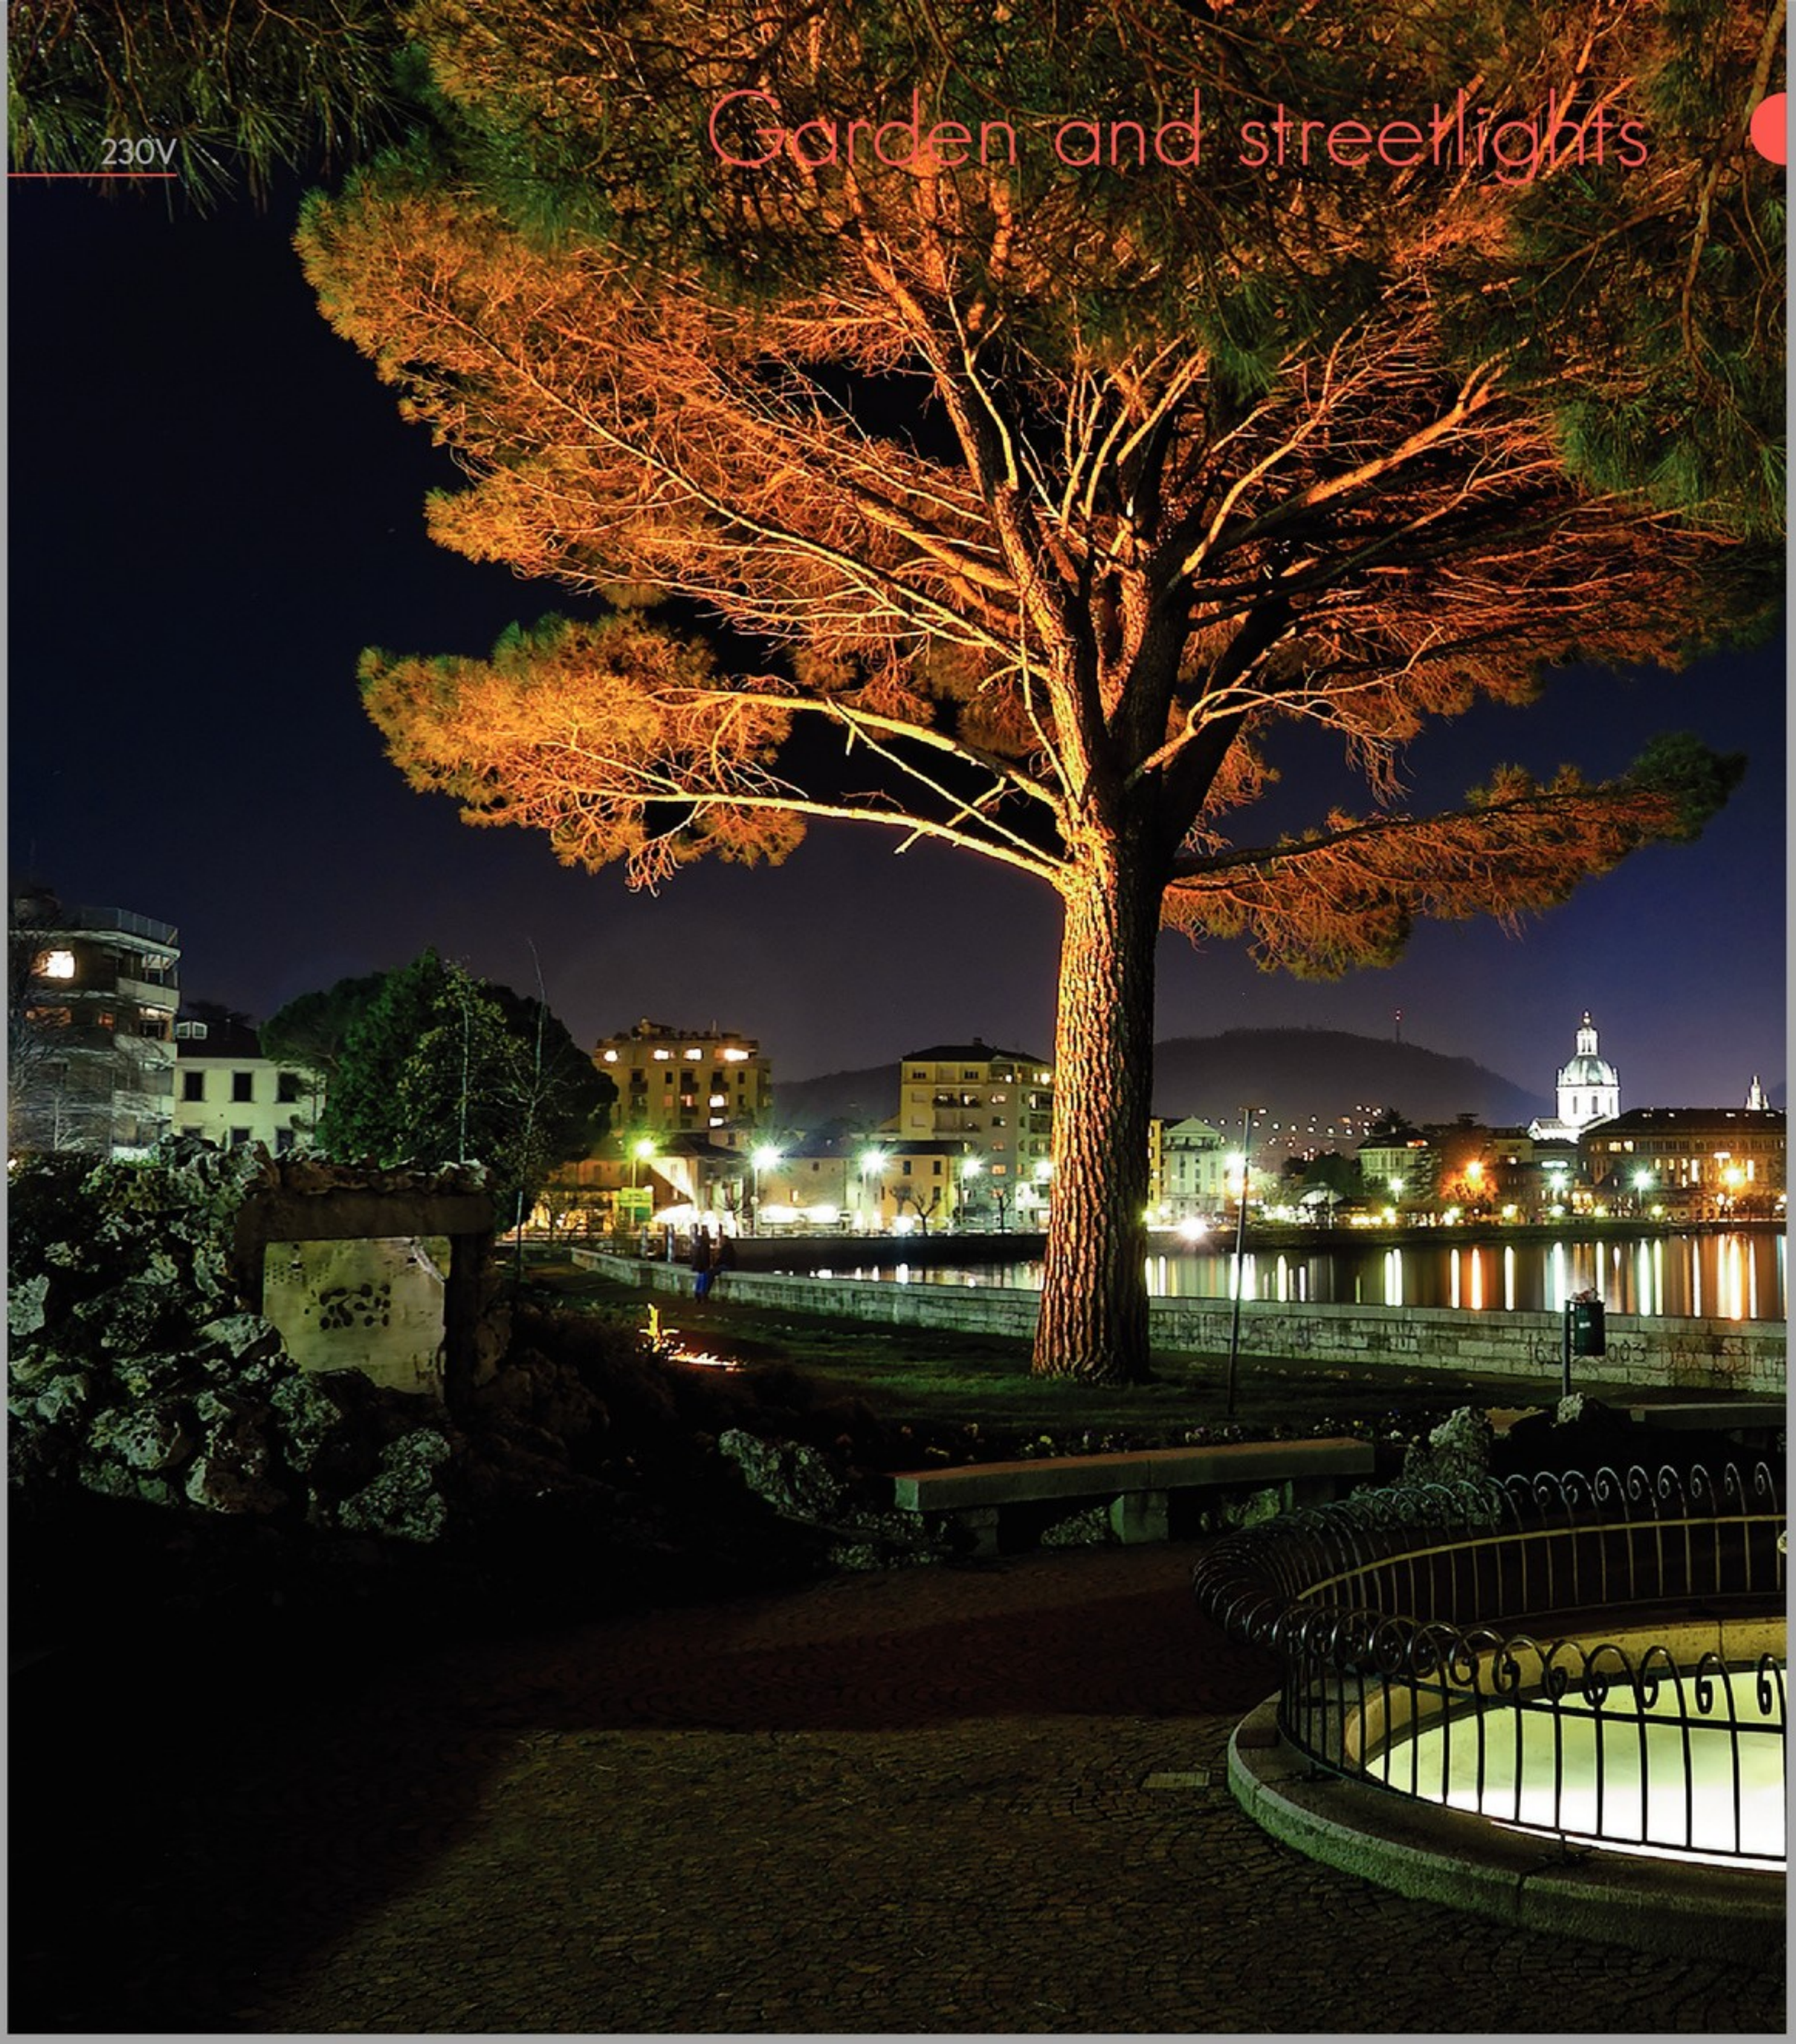

Garden and streetlights

Visual by M.Bahnen, Highlite International B.V.


Garden and streetlights


Lyon-2 WW

A0730109

3x 1W warm-white LED

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62,
  Zn 0.1, Si 0.4)
  silver sand anodisized (RAL-9006)
- Included (built-in) LED-driver (LSVC3A)

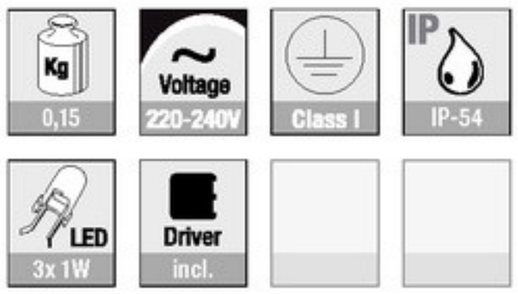

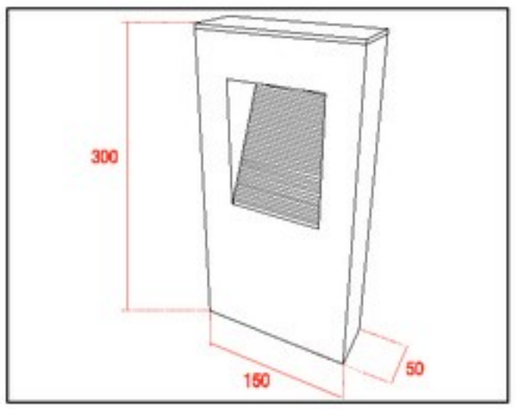





Lyon-1 WW

A0730108

3x 1W warm-white LED

- Housing: solid Aluminium
  (Cu 0.1, Mn 0.1, Fe 0.35, Mg 0.62,
  Zn 0.1, Si 0.4)
  silver sand anodisized (RAL-9006)
- Included (built-in) LED-driver (LSVC3A)

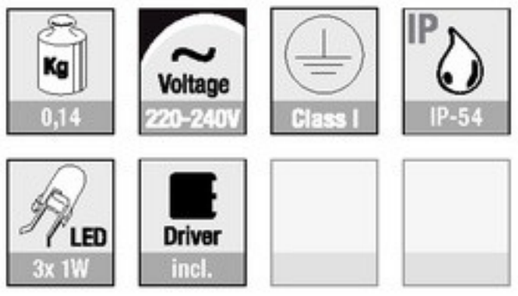

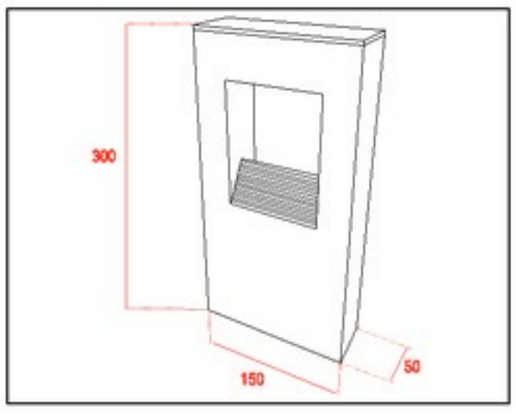







Vermont-L White

A0730207

1x 3W LED warm-white

- incl. LED driver SLPO3SS1 incl. LED
- Power consumption: 20-22W
- Housing: Aluminium
- Finish: White powder coated (RAL-9003)

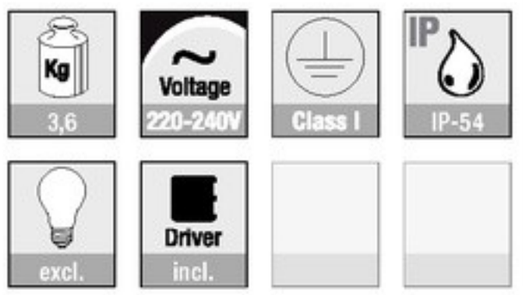

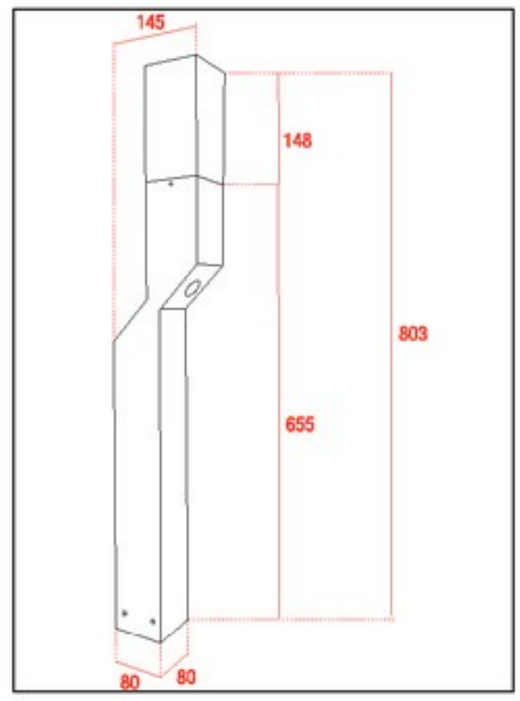





Vermont-Wall

A0245104

1x 3W LED warm-white, down

- incl. LED driver SLPO3SS1 incl. LED
- Power consumption: 20-22W
- Housing: Aluminium
- Finish: White powder coated (RAL-9003)

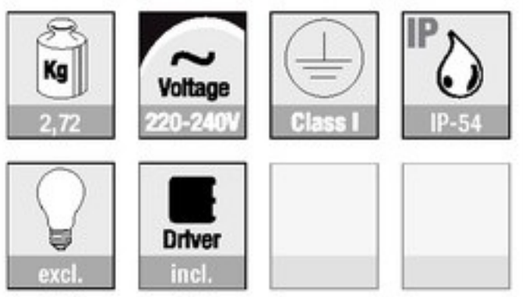

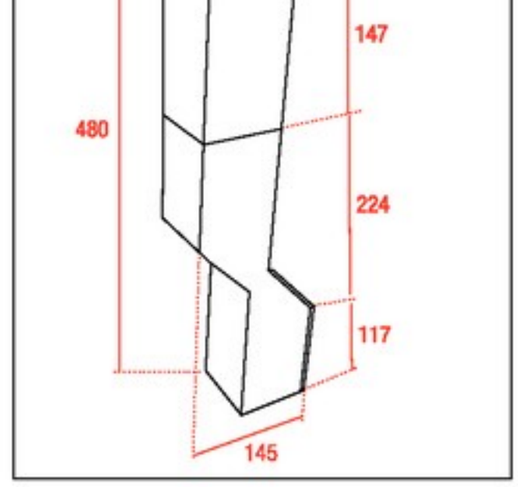

Garden and streetlights



Visual by M.Bahnen, Highlite International B.V.

Garden and streetlights

Visual by M.Bahnen, Highlite International B.V.


Garden and streetlights

Sevilla LED WW


A0720103

3W LED warm-white LED

- Included built-in trafo / LED-driver
- Aluminium housing
- Weight: 1,76 kg
- Dimensions: ø168/174 x H34 mm
- IP classification: IP-54 Class I
- Power connection: 220-240V AC
- Power consumption: 3,9W





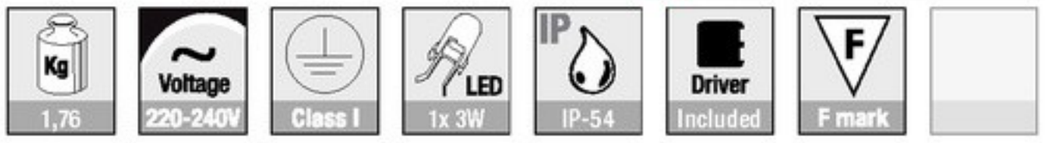



Sevilla LED B

A0720113


3W LED blue LED

Sevilla G9


A0720140

G9 max. 40W

- Aluminium housing
- Weight: 1,74 kg
- Dimensions: ø168/174 x H34 mm
- IP classification: IP-54 Class I
- Power connection: 220-240V AC
- Power consumption: 25W











Marbella-1

A0720151

3 x 1W warm white LED

- Housing: Polished Aluminium
- Dimensions fixture: ø94 x 116 mm

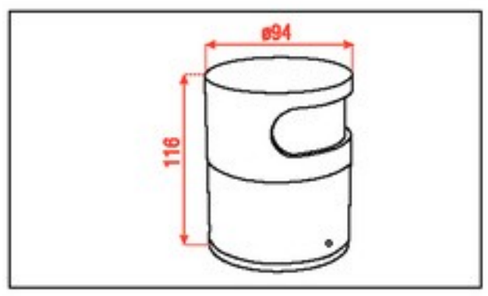

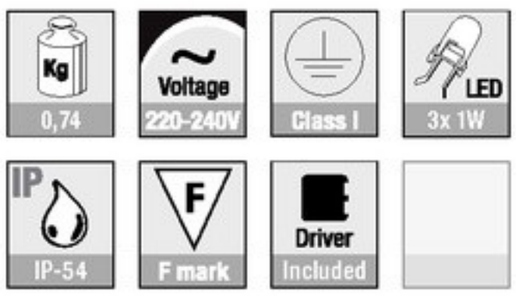





Marbella-2

A0720152

3 x 1W warm white LED

- Housing: Polished Aluminium
- Dimensions fixture: ø94 x 116 mm

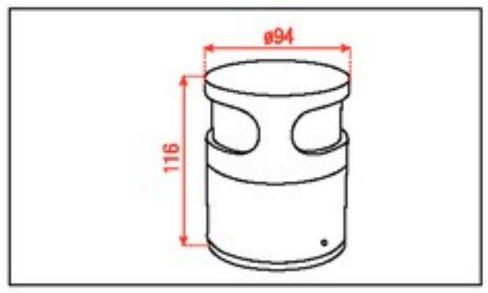

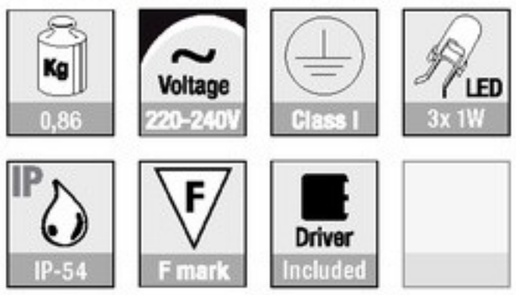




Garden and streetlights




Aberdeen-S — A0730020

LED RGB 3 x 1W LED 24 Vdc

- RGB: 1x red, 1x green, 1x blue
- Max. input current: 350mA
- Included 1 m. IP-55 (RGB) connection cable
- Dimensions Ø: 66 mm
- Excl. Garden-Spike
- RGB Controller not incl.

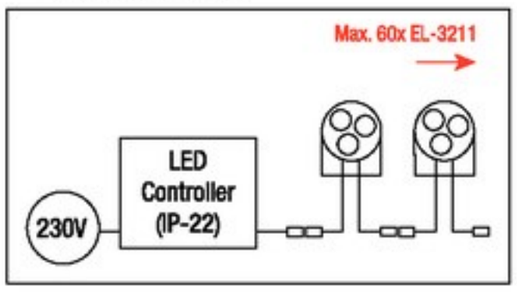

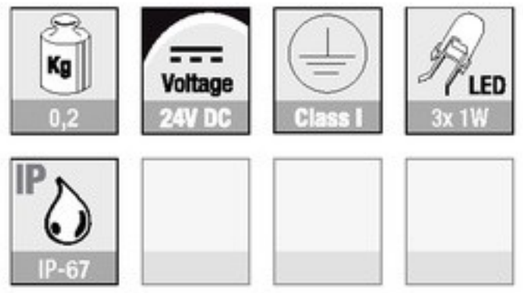





Aberdeen-M — A0730021

LED RGB 6 x 1W LED 24 Vdc

- RGB: 2x red, 2x green, 2x blue
- Max. input current: 350mA
- Included 1 m. IP-55 (RGB) Connection cable
- Dimensions Ø: 89 mm
- Excl. Garden-Spike
- RGB Controller not incl.

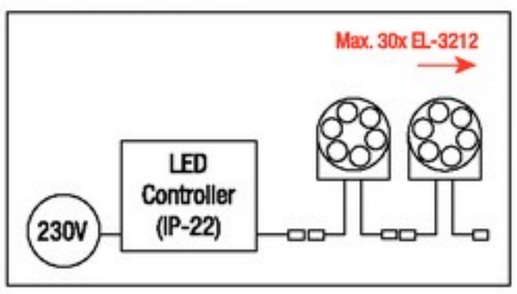

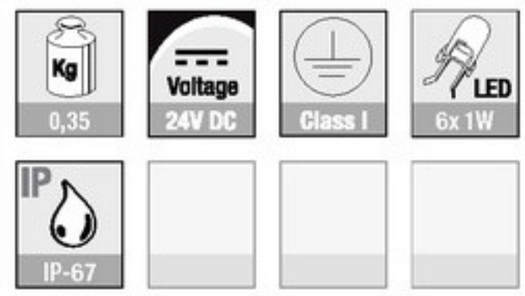





Aberdeen-L — A0730022

LED RGB 12 x 1W LED 24 Vdc

- RGB: 4x red, 4x green, 4x blue
- Max. Input Current: 350mA
- Included 1 m. IP-55 (RGB) Connection cable
- Dimensions Ø: 115 mm
- Excl. Garden-Spike
- RGB Controller not incl.

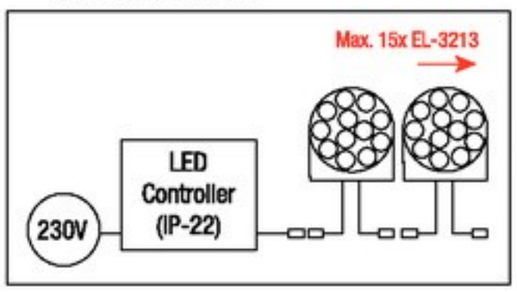

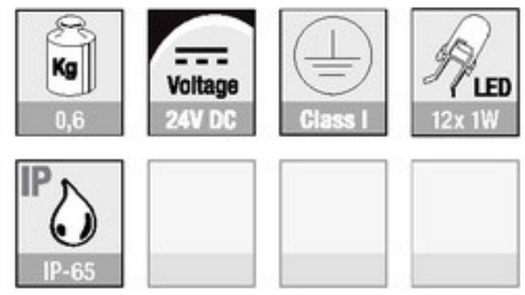

Spyke for Aberdeen Spots	
A9930001	Black

Splitter cable for Aberdeen	
A9920100	1 m



A9920100

Connection Cable for Aberdeen	
A9920001	1 m connection cable
A9920003	3 m connection cable
A9920005	5 m connection cable



A9920001

Endcap for Aberdeen	
A9920000	



Garden and streetlights

Garden and streetlights

Garden and streetlights


Yosemite 40 cm **A0730110**
TC-D 10W G24D-1


Yosemite 60 cm **A0730111**
TC-D 18W G24D-2

Yosemite 90 cm **A0730112**
TC-D 18W G24D-2

Yosemite 120 cm **A0730113**
TC-D 18W G24D-2

- Housing: Aluminium silver-grey powder coated RAL 9006
- Incl.: Built-in ballast

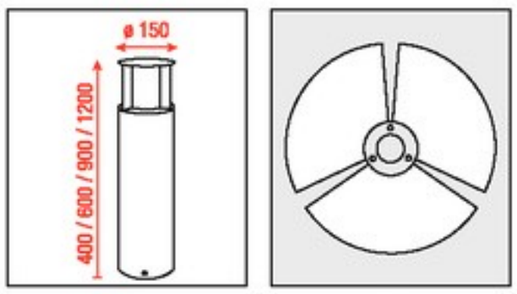

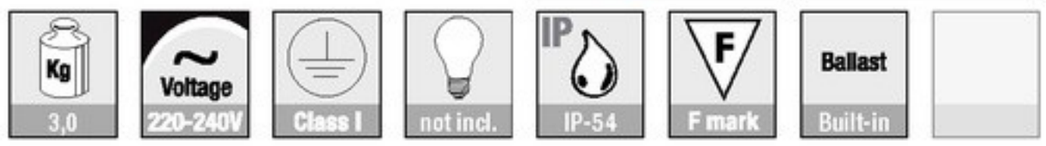



Also available as wall-mounted model on page 96



Yosemite Recessed **A0730101**
Round, Dulux D 10W G-24d-1

- Housing: Aluminium silver-grey powder coated RAL 9006
- Incl.: Built-in Ballast

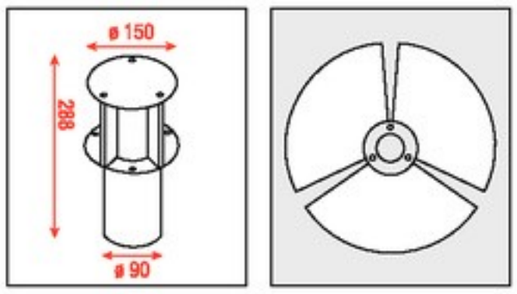

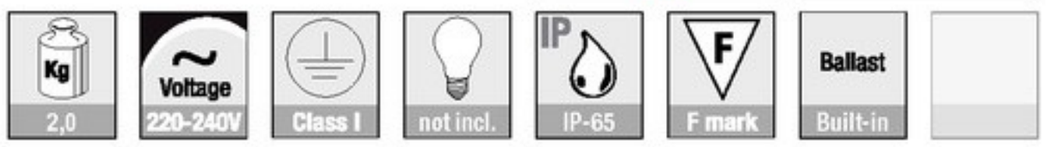

Also available as wall-mounted model on page 96



Garden and streetlights




Richmond 40 cm **A0730120**
TC-D 10W G24D-1


Richmond 60 cm **A0730121**
TC-D 18W G24D-1

Richmond 90 cm **A0730122**
TC-D 18W G24D-1

Richmond 120 cm **A0730123**
TC-D 18W G24D-1

- Housing: Aluminium silver-grey powder coated RAL 9006
- Incl.: Built-in ballast

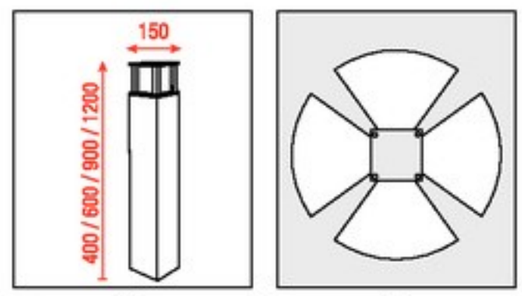

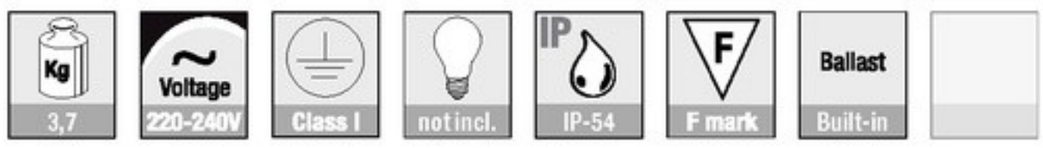


Also available as wall-mounted model on page 96



Richmond Recessed **A0730102**
Dulux D 10W G-24d-1

- Housing: Aluminium silver-grey powder coated RAL 9006
- Incl.: Built-in Ballast

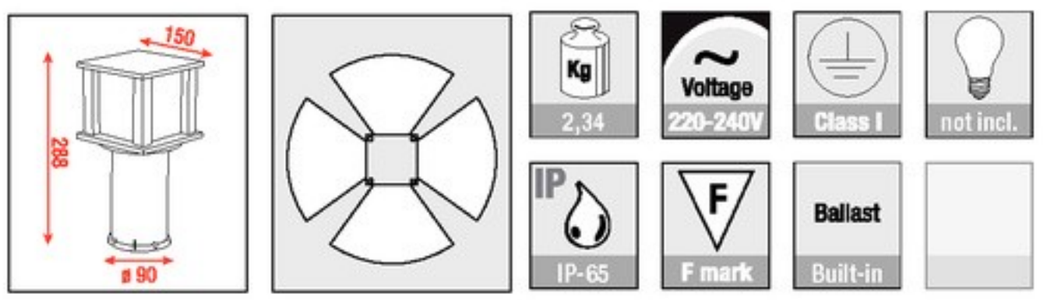


Also available as wall-mounted model on page 96

Garden and streetlights



Garden and streetlights

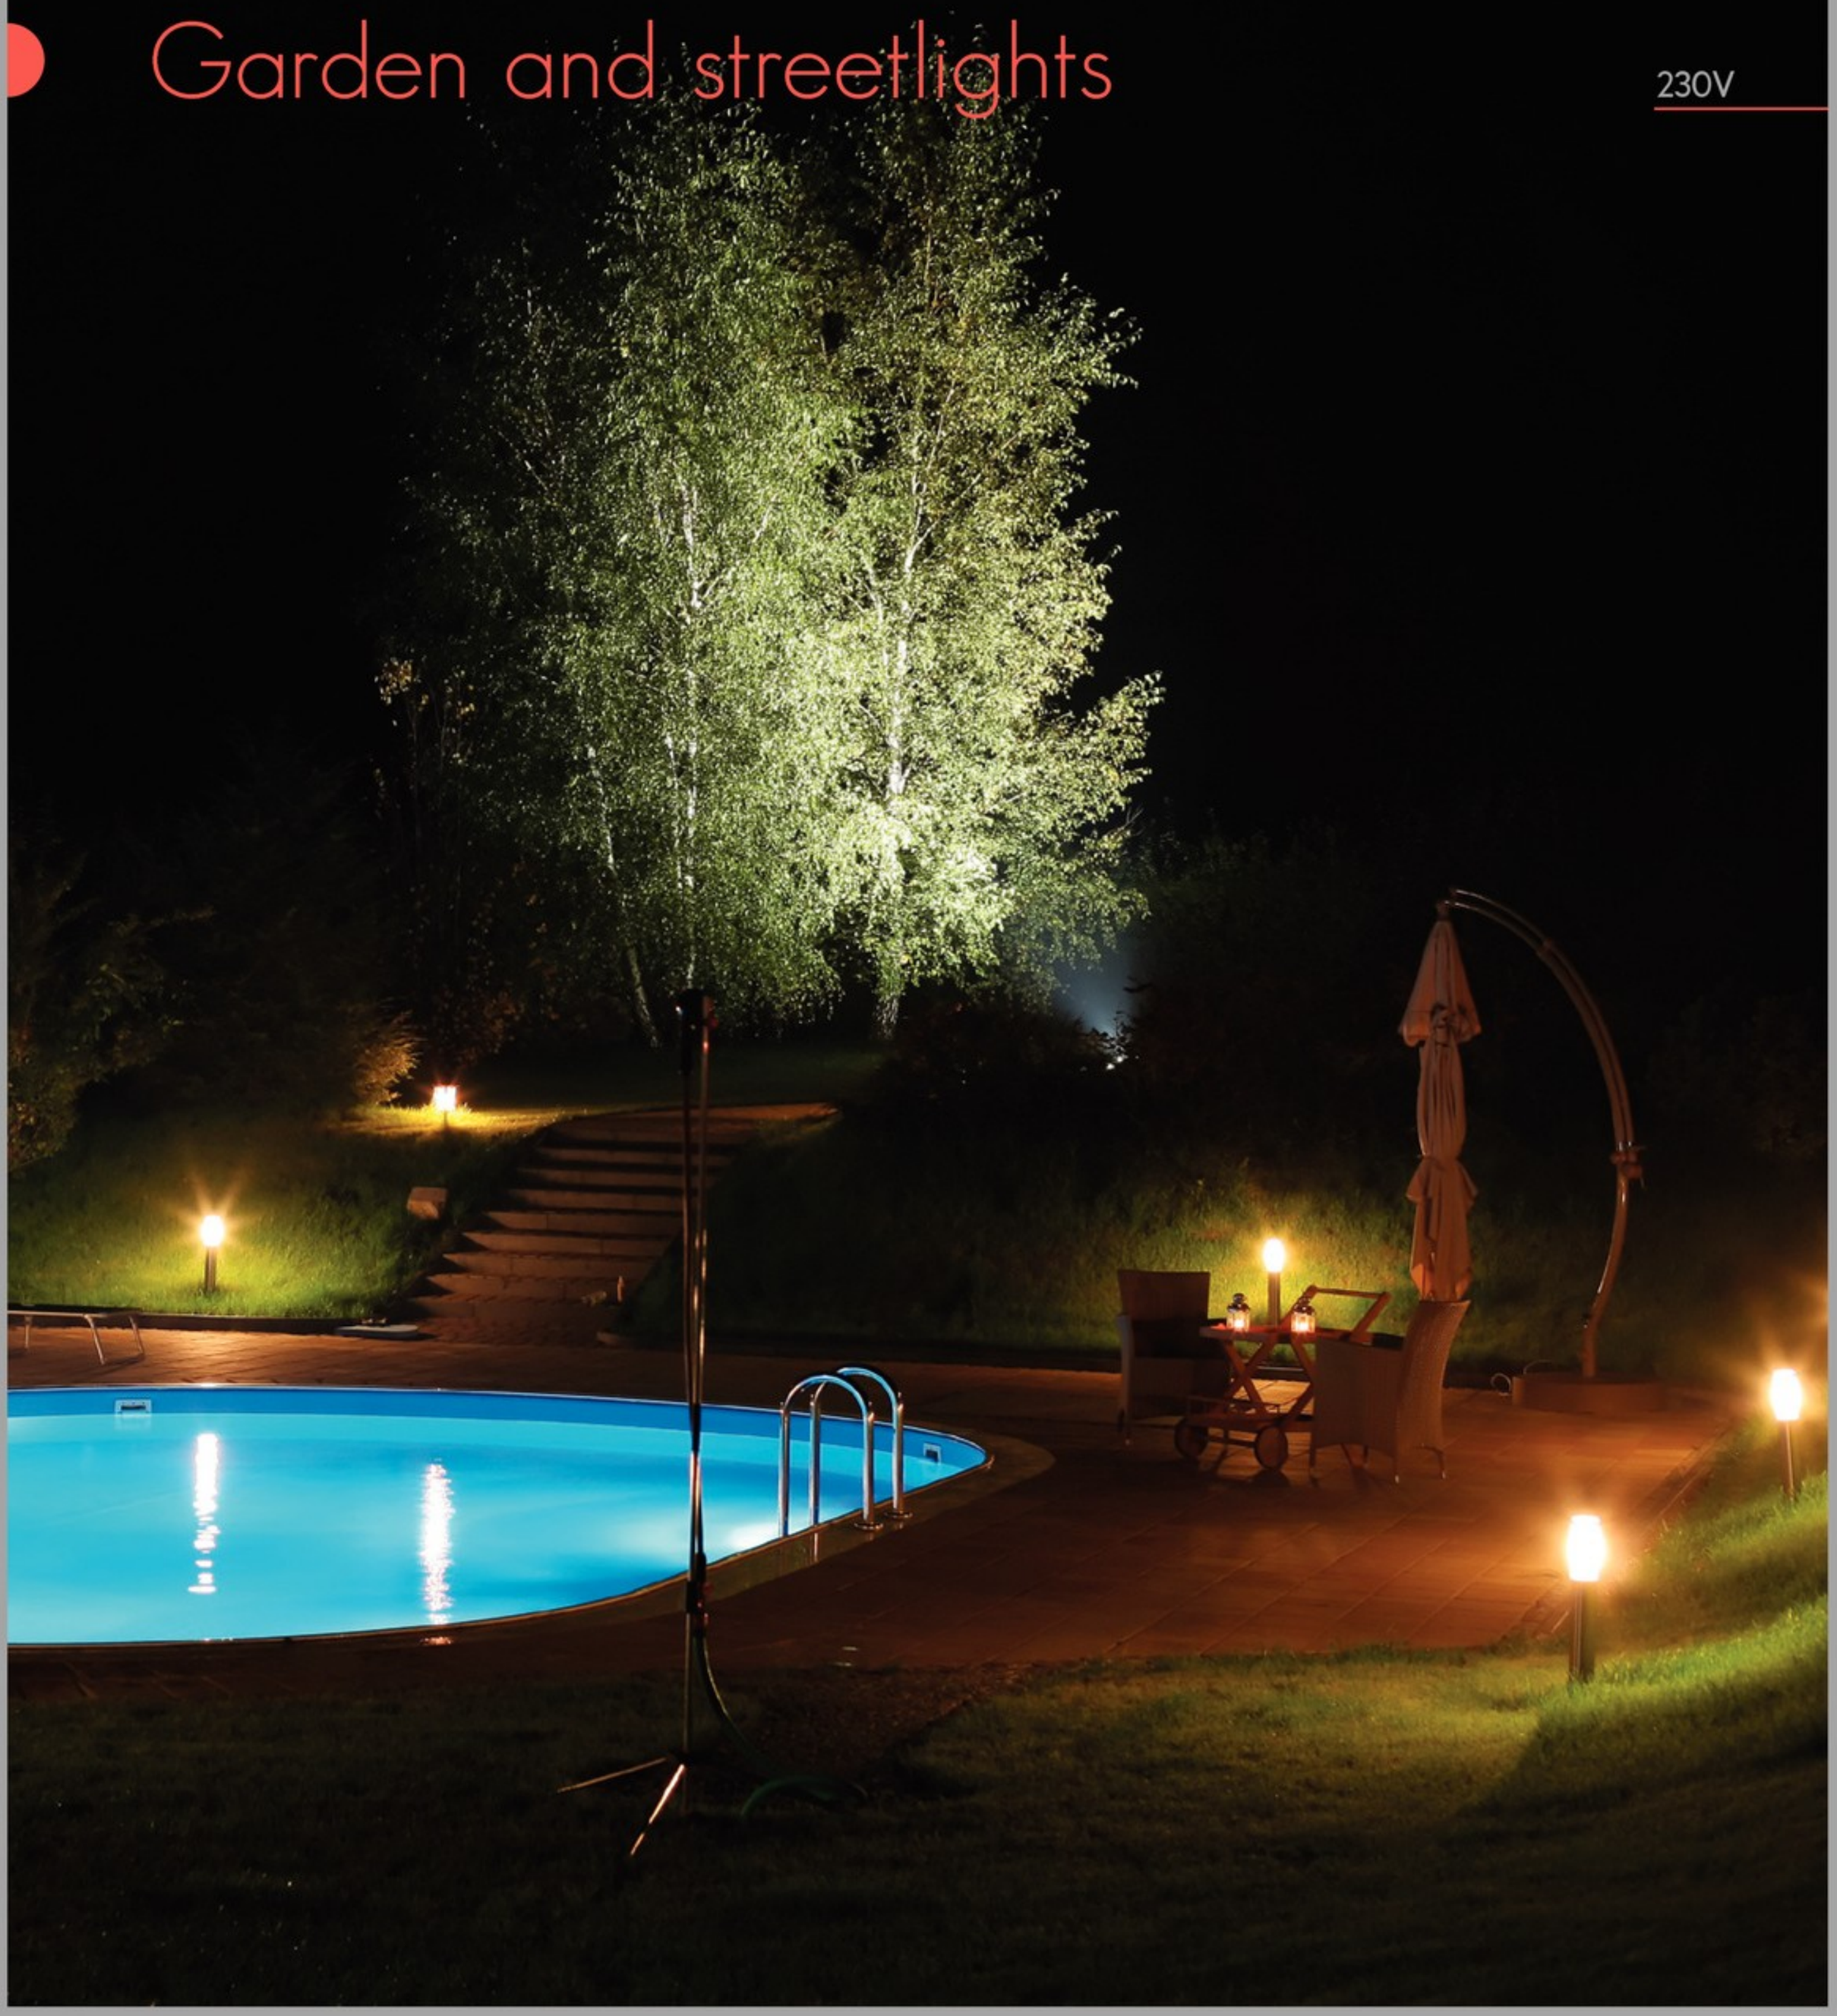

Garden and streetlights


Greenway 40 cm **A0730130**
E-27 TC-DEL 18W

Greenway 60 cm **A0730131**
E-27 TC-DEL 18W

Greenway 90 cm **A0730132**
E-27 TC-DEL 18W

Greenway 120 cm **A0730133**
E-27 TC-DEL 18W

- Housing: Aluminium silver-grey powder coated RAL 9006
- Incl.: Built-in ballast

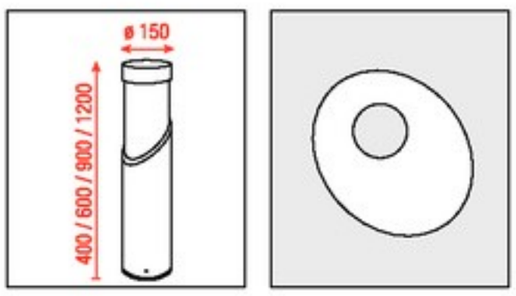



Also available as wall-mounted model on page 96



Garden and streetlights

LED TECHNOLOGY







Daytona 60cm **A0730141**
1 x 3W warm-white LED

Daytona 90cm **A0730142**
1 x 3W warm-white LED

- Light direction: indirect
- Built-in LED driver
- Power consumption: 3,3W
- Housing: Polished Aluminium
- Dimensions fixture: 900 x ø138 mm

Banff-L **A0730205**
3 x 1W LED Warm White

- Housing: Polished Aluminium
- Dimensions fixture: ø119 x 600 mm
































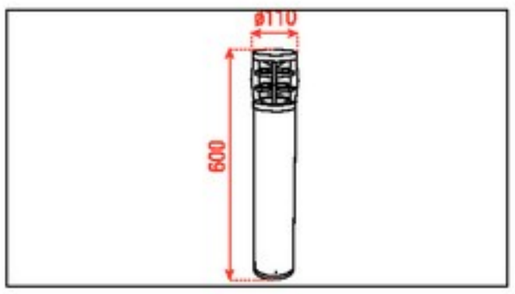

Also available as wall-mounted model on page 96

Garden and streetlights



Visual by M.Bahnen, Highlite International B.V.

Garden and streetlights



Visual by M.Bahmen, Highlite International B.V.

Garden and streetlights



Colorado 60cm
7 x 1W warm-white LED

- Light direction: direct
- Built-in LED driver
- Power consumption: 7,4W




A0730151

- Housing: Polished Aluminium
- Dimensions fixture: 90 x 90 x 600 mm



Sarasota 60cm
3 x 1W warm-white LED

- Light direction: direct
- Built-in LED driver
- Power consumption: 4W

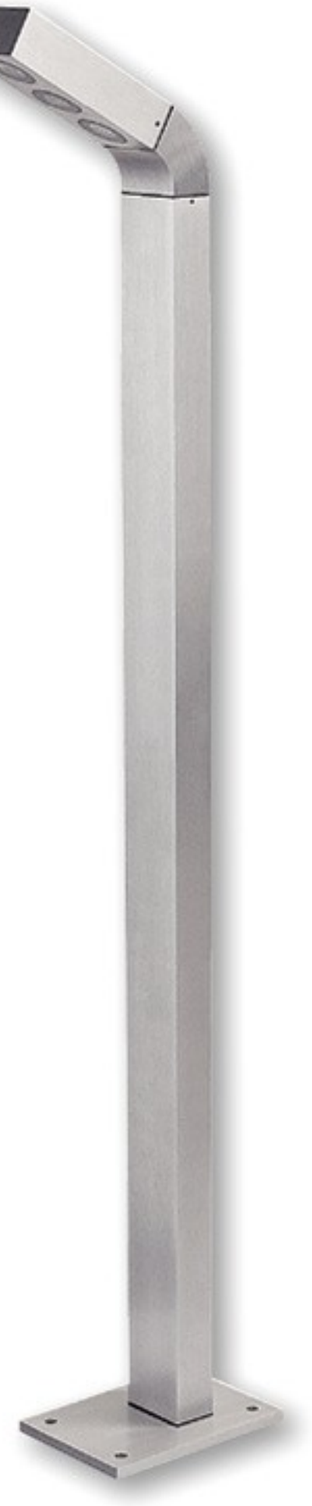

A0730161


- Housing: Polished Aluminium
- Dimensions fixture: 90 x 120 x 600 mm

Colorado 90cm
7 x 1W warm-white LED

A0730152


Sarasota 90cm
3 x 1W warm-white LED

A0730162

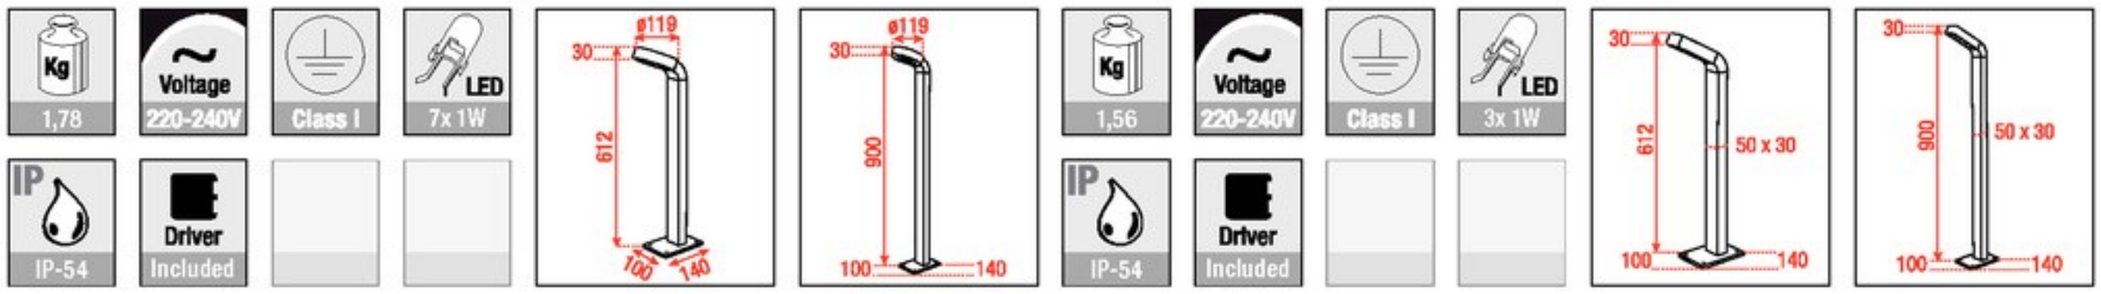





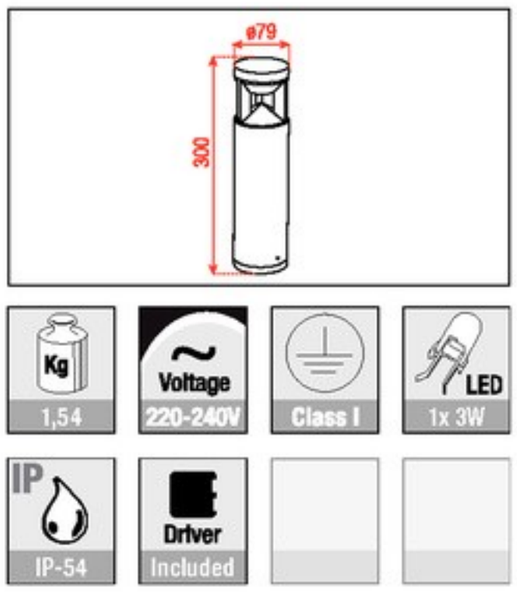


Nevada 30cm

A0730170

1 x 3W warm-white LED

- Light direction: indirect
- Built-in LED driver
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: ø79 x 300 mm



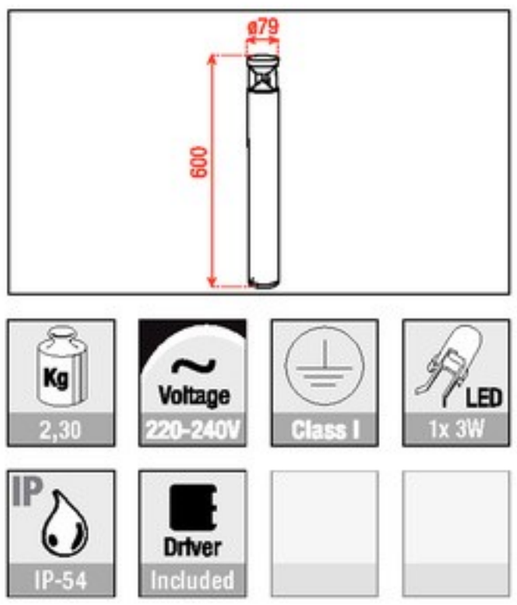

Nevada 60cm

A0730171

1 x 3W warm-white LED

- Light direction: indirect
- Built-in LED driver
- Power consumption: 4W
- Housing: Polished Aluminium
- Dimensions fixture: ø79 x 600 mm

Visual by M. Bannen, Highlite International B.V.

Garden and streetlights


Quebec-2

A0730105

3 x 3W warm-white LED

LED TECHNOLOGY

- Light direction: surround
- Built-in LED driver
- Power consumption: 12W
- Housing: Polished Aluminium
- Dimensions fixture: ø110 x 600 mm

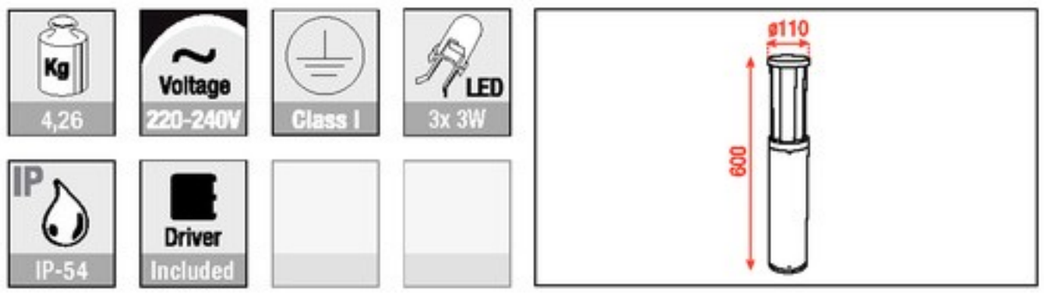




Dakota-1

A0730210

1 x 24W TC-L / 2G11

- Housing: Polished Aluminium
- Dimensions fixture: 120 x 60 x 600 mm
- Excluded Electronic Ballast + Lamp

Available lamps:
24W Duluxe 930 3000K
24W Duluxe 940 4000K
24W Duluxe 954 5400K

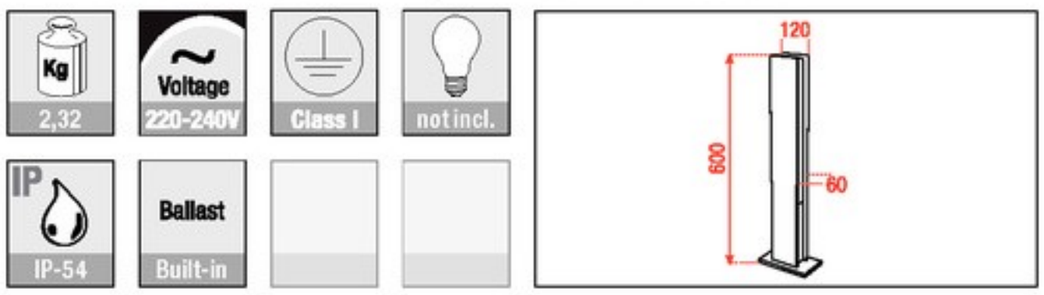




Brussel-60WW **A0240210**


60W warm white cob LED - 3800 Lumen


Brussel-60CW **A0240211**

60W cool white cob LED - 4000 Lumen

- Housing: Anodic oxidation treated aluminium
- Finish: Black colour
- Diffuser: 4mm tempered glass
- Light source: 60 watt cool white COB LED
- Color temperature: cool white 5500K
- Beam Angle: 120-150°
- Lumen output: 4000
- Power connection: 110-240 Vac
- Power consumption: 65 Watt
- Dimensions: 393x285x93mm

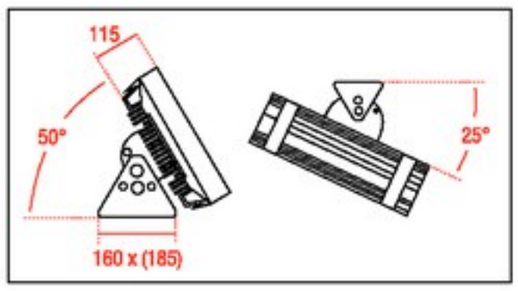

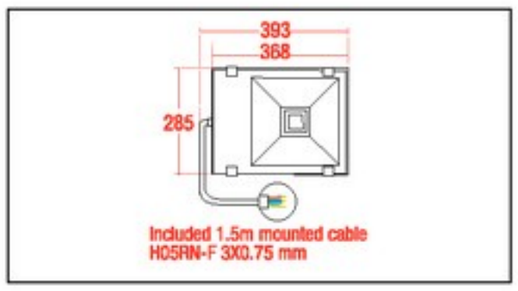

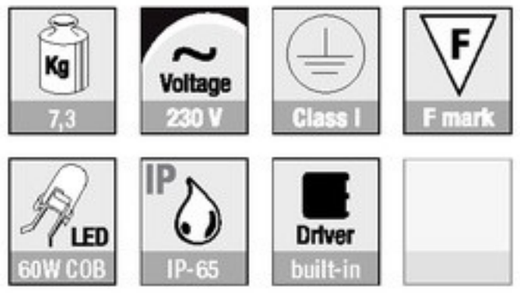




Brussel-120WW **A0240310**


2 x 60W warm white cob LED - 7800 Lumen


Brussel-120CW **A0240311**

2 x 60W cool white cob LED - 8400 Lumen


- Housing: Anodic oxidation treated aluminium
- Finish: Black colour
- Diffuser: 4mm tempered glass
- Light source: 2 x 60 watt cool white COB LED
- Color temperature: warm white 5500K
- Beam Angle: 120-150°
- Lumen output: 8400
- Power connection: 110-240 Vac
- Power consumption: 125 Watt
- Dimensions: 593x285x93mm

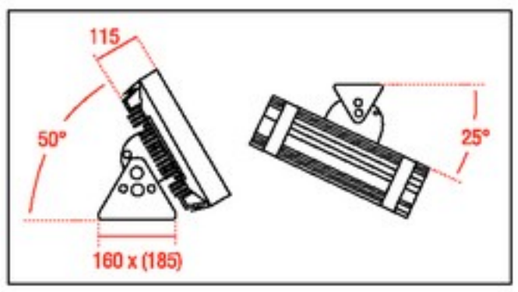

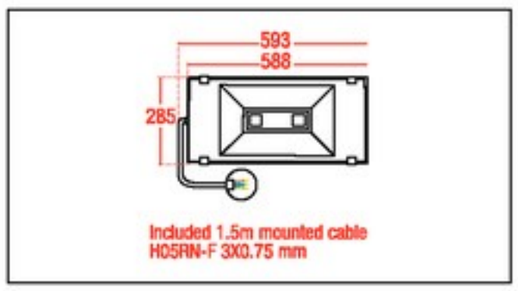

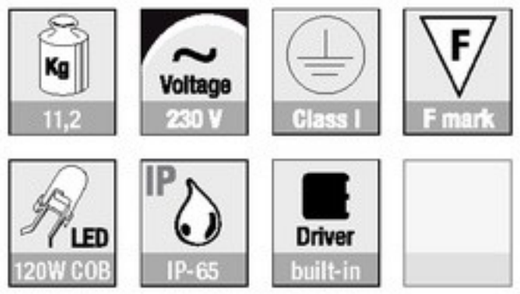


Garden and streetlights

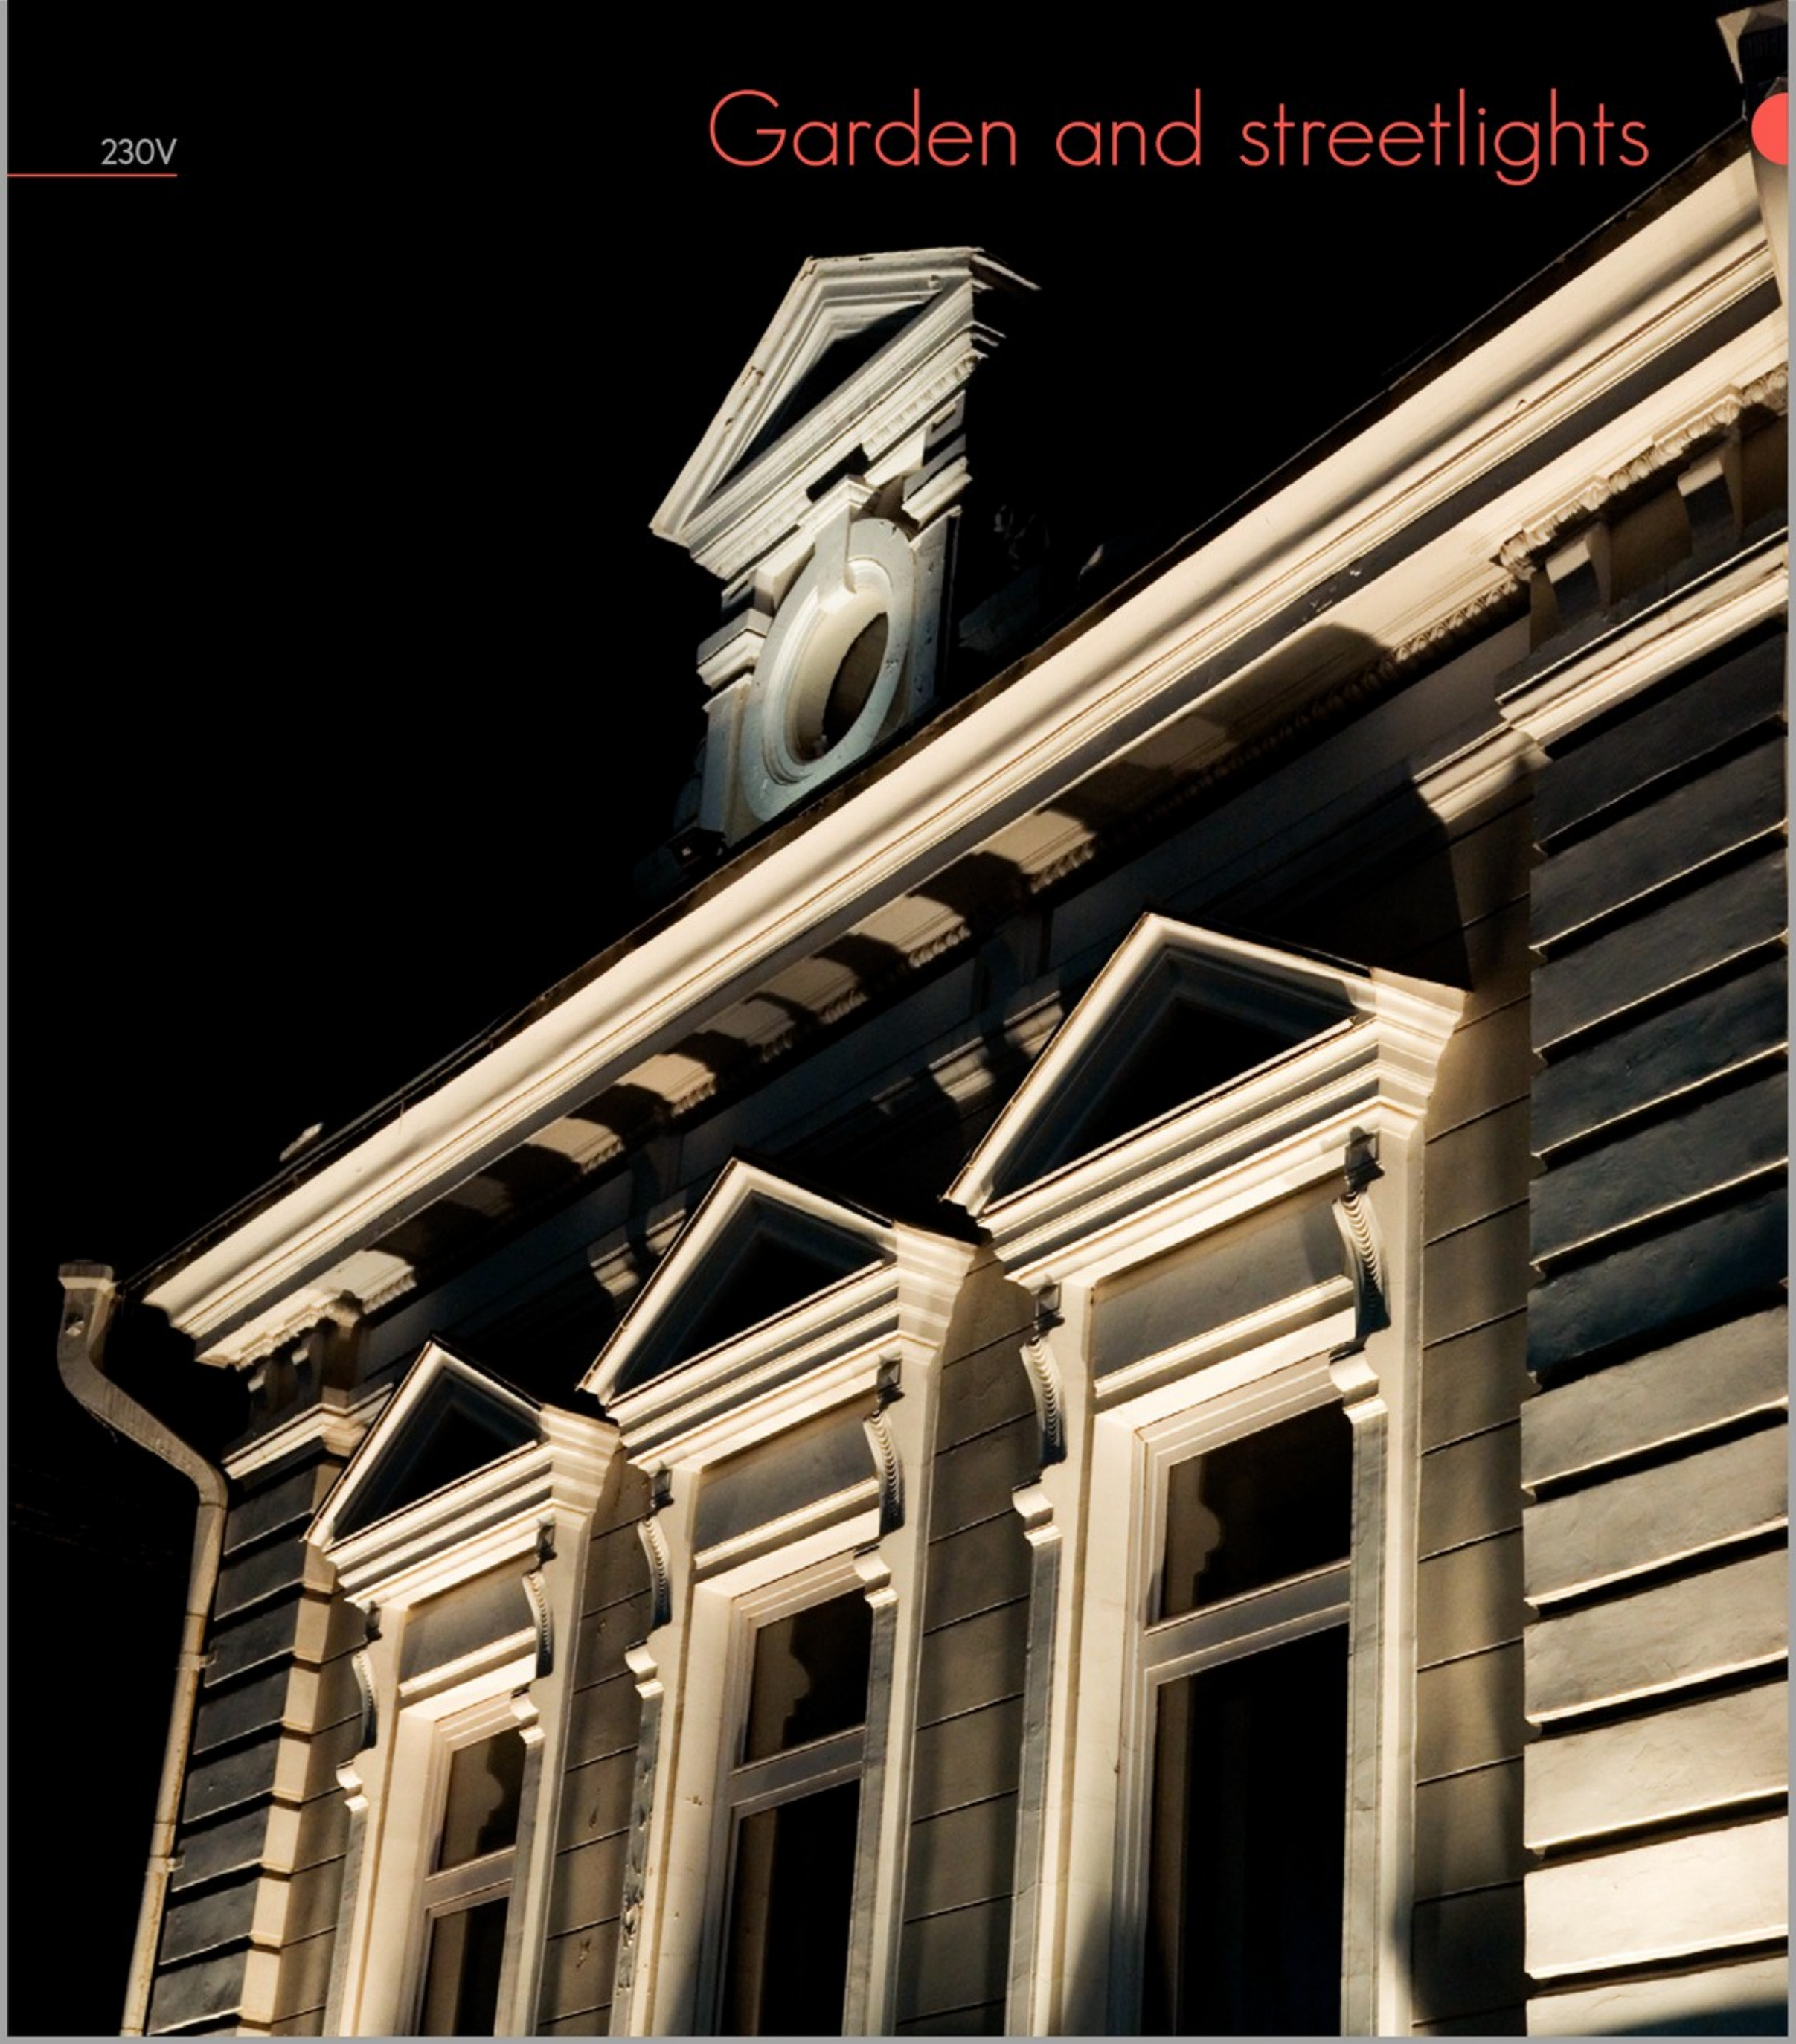



Markers & Signal lights

LED TECHNOLOGY

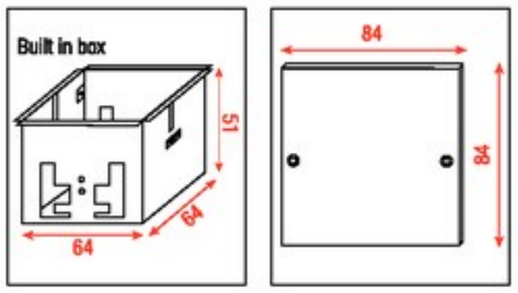

- Housing: Aluminium
- Built in box: Included
- With Built in transformer

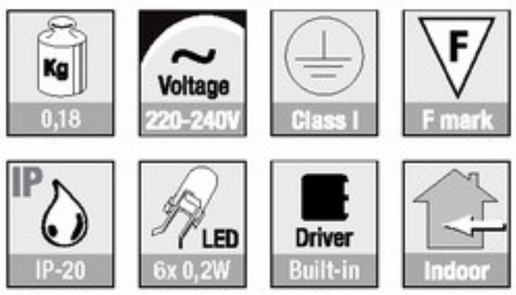

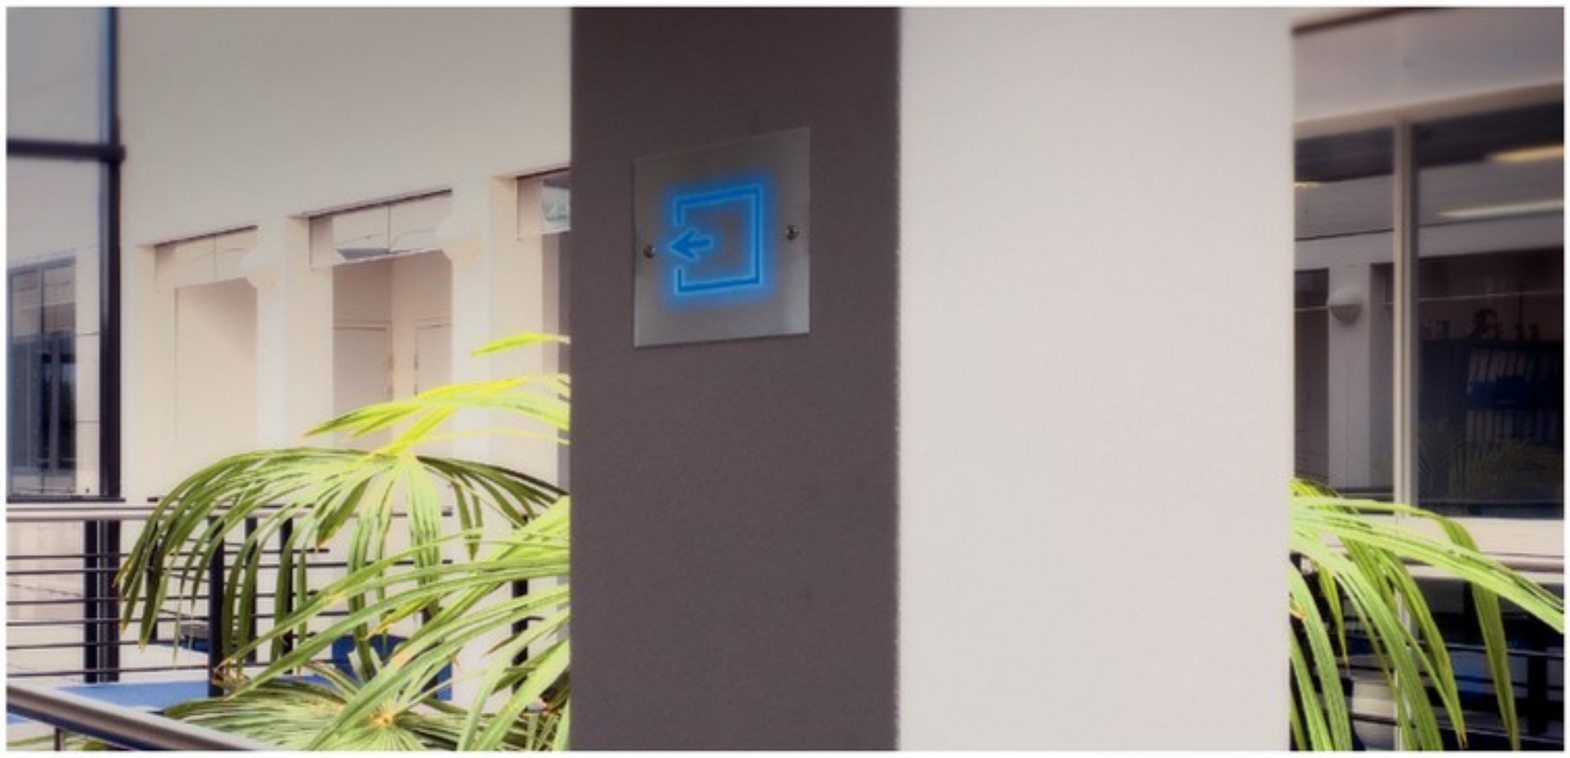

Signal-1 **A0830001**
Glass/Blue



Signal-2 **A0830002**
Cup/Blue



Signal-3 **A0830003**
Men/Blue



Signal-4 **A0830004**
Women/Blue



Signal-8 **A0830008**
Information/Blue



Signal-9 **A0830009**
Smoking/Blue



Signal-10 **A0830010**
No Smoking/Red



Signal-12 **A0830012**
Arrow/Blue





Markers & Signal lights

Galaxy-1CW — A0840001
Cold white LED's

Galaxy-1B — A0840002
Blue LED's

- Housing: Polished aluminium
- LED: LUXEON
- Incl.: built-in transformer

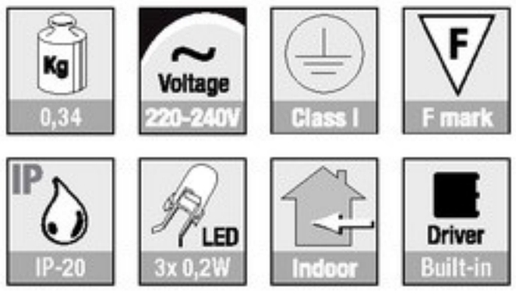

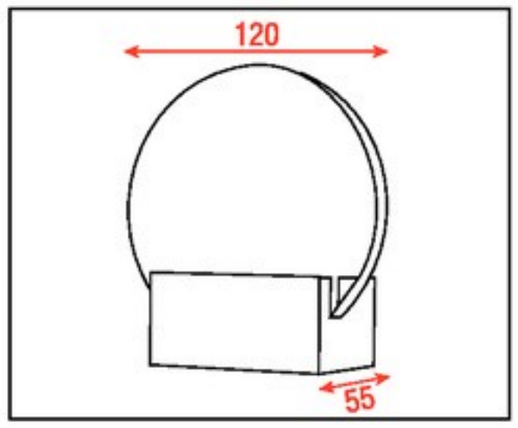





Galaxy-2CW — A0840011
Cold white LED's

Galaxy-2B — A0840012
Blue LED's

- Housing: Polished aluminium
- LED: LUXEON
- Incl.: Built-in transformer

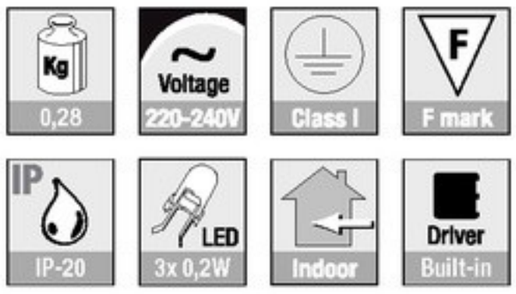

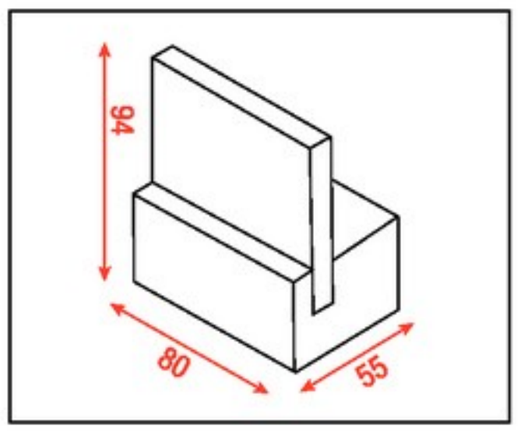






Grafix — A1010050

With built in transformer

- Housing: Polished aluminium
- Incl.: 3 gobo's (OPEN - SALE - WELCOME)

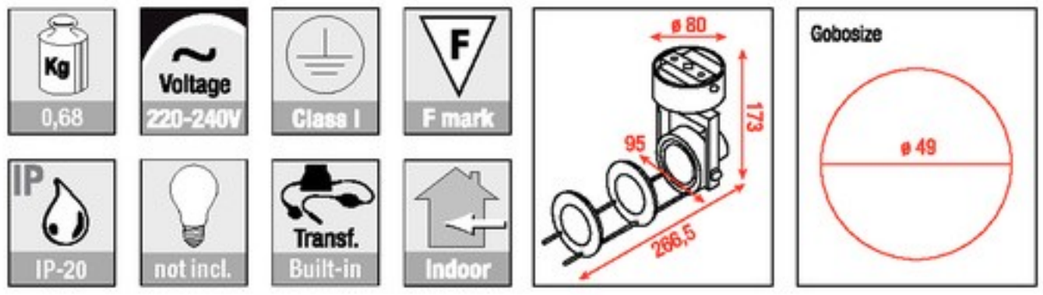




Grafix-1P — A1011050

Mounted on 1-Phase track-adapter

- Housing: Polished aluminium
- Incl.: 3 gobo's (OPEN - SALE - WELCOME)
- Incl.: Built-in transformer

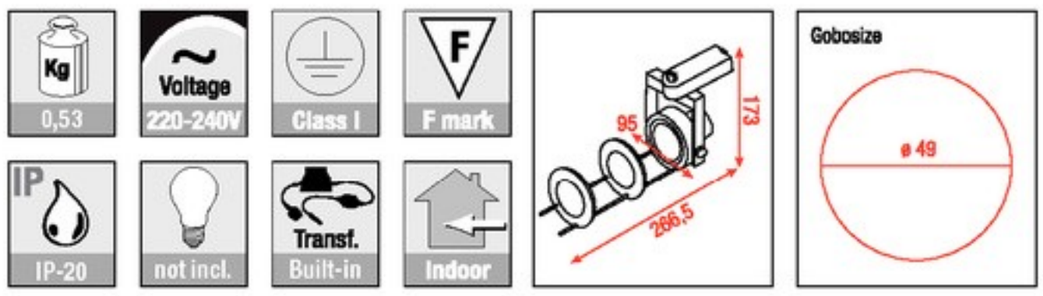




Grafix-3P — A1013050

Mounted on 3-Phase track-adapter

- Housing: Polished aluminium
- Incl.: 3 gobo's (OPEN - SALE - WELCOME)
- Incl.: Built-in transformer

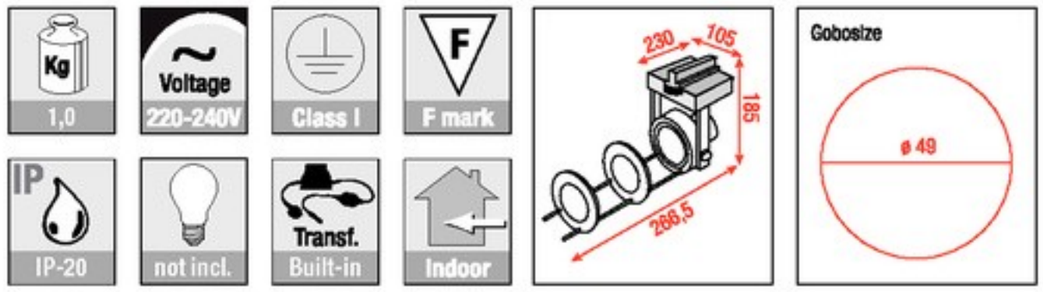

Special lightproducts



Grafix Gobo text

OPEN	
	A9910001 OPEN
WELCOME	
	A9910002 WELCOME
DISCOUNT	
	A9910003 DISCOUNT

SALE	
	A9910004 SALE
SUMMER SALE	
	A9910005 SUMMER SALE
WINTER SALE	
	A9910006 WINTER SALE

NEW COLLECTION	
	A9910007 NEW COLLECTION
10%	
	A9910008 10%
20%	
	A9910009 20%

30%	
	A9910010 30%
40%	
	A9910011 40%
50%	
	A9910012 50%

Accessories










Mountingbox-Adapter 42mm — A9930005


Housing: Polished Aluminium
Weight: 0,05 kg
Dimensions: ø71 /L20 mm
Inner diameter: ø42 mm





Mountingbox-Adapter 36mm — A9930006

Dimensions: ø71 / L20 mm
Weight: 0,05 kg






Extension Cable with male- & female-plug	
A9920515	1,5 m
A9920530	3 m

3AP LED 3-way serial connection box — A9920500


- Included 1m cable + plug
- Weight: 0,001 kg
- Dimensions: 51 x 20 x 20 mm
- IP classification: IP-20

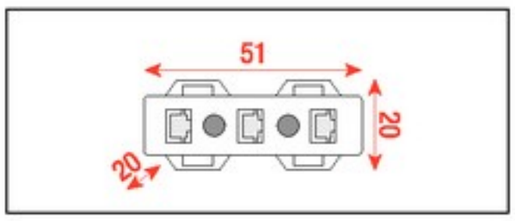



6AP LED 6-way serial connection box — A9920501

- Included 1m cable + plug
- Weight: 0,001 kg
- Dimensions: 51 x 30 x 20 mm
- IP classification: IP-20

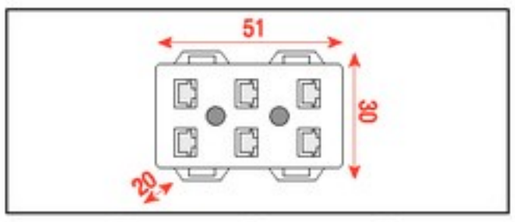



Spyke for Aberdeen Spots	
A9930001	Black

Splitter cable for Aberdeen	
A9920100	1 m

Connection Cable for Aberdeen	
A9920001	1 m connection cable
A9920003	3 m connection cable
A9920005	5 m connection cable

Endcap for Aberdeen	
A9920000	



A9920100



A9920001



Accessories

LED constant current driver DC 350mA/1x3W — A9950001

- Recessed down-light
  1m cable + plug included
- Excl. LED driver
- Aluminium housing
- Mounting: 39 x 216 mm
- IP classification: IP-20 Class II
- Power connection: LED constant current driver 350mA





LED constant current driver 350mA/1-4W — A9950002

- Min. 1 x 1W Max. 4 x 1W
- Included connection box 6AP
  + 1m cable +plug
- IP classification: IP-20 Class-II






LED constant current driver 350mA/1-8W — A9950003

- Min. 1 x 1W Max. 8 x 1W
- Included connection box 3AP
  + 1m cable +plug
- IP classification: IP-20 Class-II



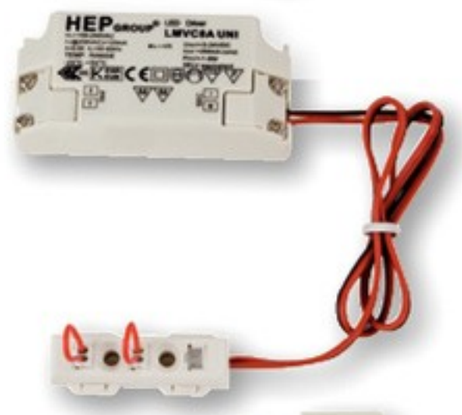

LED constant current driver 350mA/1-18W — A9950004

- Min. 3 x 1W Max. 18 x 1W
- Included connection box 3AP
  + 1m cable + plug
- IP classification: IP-20 Class-II





LED constant current driver DC 700mA/1x3W — A9950006

- Included 1m cable + 3W plug




LED constant current driver 700mA/3-12W — A9950005

- Min. 1 x 3W Max. 4 x 3W
- Included connection box 3AP + 1m cable + plug
- IP classification: IP-20 Class-II






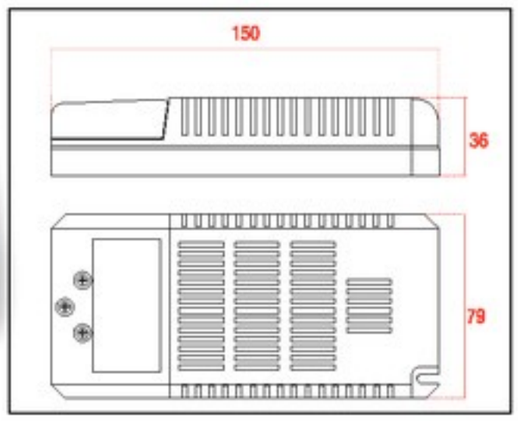


TCI Ballast — A9900050

HCI 70W/G12

- Power connection: 220-240 Vac
- Frequency: 50/60Hz
- Power: 70W
- Power Factor: 0,97
- Energy efficiency: EEI=A2
- Dimensions: 150 x 79 x 35 mm

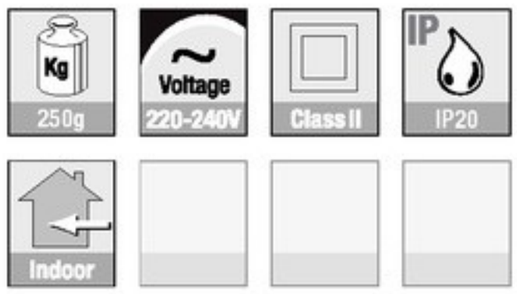




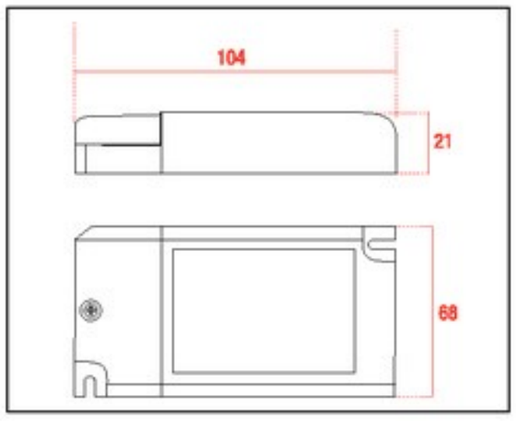


TCI Ballast MBQ113/2 — A9900014

TC-D/E 13W GX24q-4

- Power connection: 220-240 Vac
- Frequency: 50/60Hz
- Power: 13W
- Power Factor: 0,94
- Energy efficiency: EEI=A2
- Dimensions: 103 x 67 x 21 mm

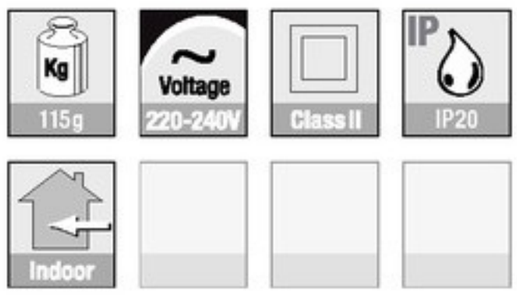




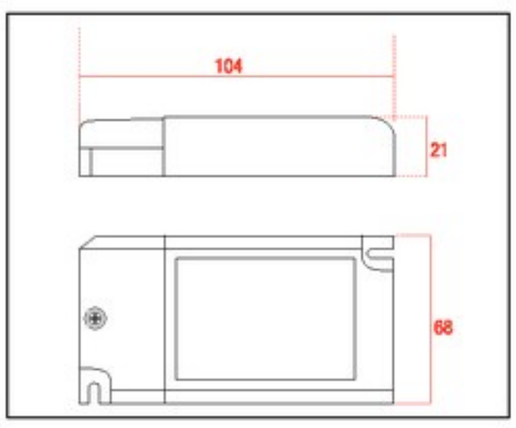


TCI Ballast MBQ118/2 — A9900019

TC-D/E 18W GX24q-2

- Power connection: 220-240 Vac
- Frequency: 50/60Hz
- Power: 18W
- Power Factor: 0,95
- Energy efficiency: EEI=A2
- Dimensions: 103 x 67 x 21 mm

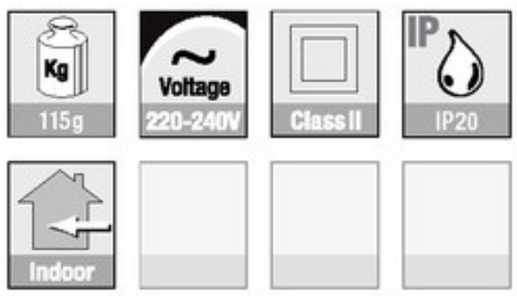




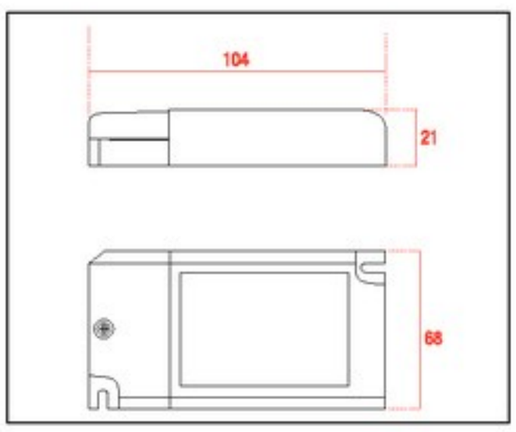

TCI Ballast MBQ142/2 — A9900033

TC-D/E 26W GX24q-3, TC-T/E 32W GX24q-3

- Power connection: 220-240 Vac
- Frequency: 50/60Hz
- Power: 26 - 42W
- Power Factor: 0,94
- Energy efficiency: EEI=A2
- Dimensions: 103 x 67 x 21 mm

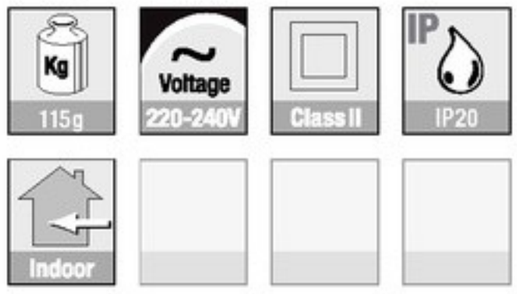

Accessories

AET-20.70 Trafo 240V/12V 20-70W — A9900070

Electr. Trafo for 12V~AC Halogen Lamps

- Primair: 220V-240V~ 50Hz 0.29A Cos. 0,99
- Secundair: 12V~ AC min. 20VA, max. 70VA
- ta: 45°
- tc: 80°
- Cos. Phi factor: 0,99
- Dimmable with resistive and inductive dimmers
- Short circuit, thermal and overload protection
- Auto reset with quick start

Kg 0,09 | ~ Voltage 220-240V | F F mark



AET-35.105 Trafo 240V/12V 35-105W — A9900105

Electr. Trafo for 12V~AC Halogen Lamps

- Input: 220V-240V~50Hz 0.43A Cos. 0,99
- Output: 12V~ AC min. 35VA max. 105VA
- ta: 45°
- tc: 88°
- Cos. Phi factor: 0,99
- Dimmable with resistive and inductive dimmers
- Short circuit, thermal and overload protection
- Auto reset with quick start

Kg 0,1 | ~ Voltage 220-240V | F F mark



AET-50.150 Trafo 240V/12V 50-150W — A9900150

Electr. Trafo for 12V~AC Halogen Lamps

- Input: 220V-240V~50Hz 0.43A Cos. 0,99
- Output: 12V~AC min. 50VA max 150VA
- ta: 45°
- tc: 85°
- Cos. Phi factor: 0,99
- Dimmable with resistive and inductive dimmers
- Short circuit, thermal and overload protection
- Auto reset with quick start

Kg 0,16 | ~ Voltage 220-240V | F F mark



AET-100.210 Trafo 240V/12V 100-210W — A9900210

Electr. Trafo for 12V~AC Halogen Lamps

- Input: 220V-240V~50Hz Cos. 0,99
- Output: 12V~ AC min. 100VA max. 210VA
- ta: 45°
- tc: 85°
- Cos. Phi factor: 0,99
- Dimmable with resistive and inductive dimmers
- Short circuit, thermal and overload protection
- Auto reset with quick start

Kg 0,22 | ~ Voltage 220-240V | F F mark



A9920303 Connection device 3 poles IP68



A9920305 Connection device 5 poles IP68



A9920301 Connection-T device 3p IP68



LED dimmable driver universal — A9950010

- Multi-power driver with dip-switch for output-selection (constant direct current or constant direct voltage)
- Dimmable 1-10V & Push dim
- Prim.Voltage: 220V~240V 50~60Hz
  ta °C: -20° +50°
  tc °C: 75°: 0.9
- Protection against overheating, short ciquit & overloads
- Dip-switch setting for direct constant current output-selection





LED Controller 12-24VDC 8A/CH — A9915001

DMX & Standalone

LED Controller with 36 control-modes: 1: Black(out), 2: static-red, 3: static-green, 4: static-blue, 5: static-yellow, 6: static-purple, 7: static-cyan, 8:static-white, 9: colour-change-1, 10: colour-change-2, 11: six-colour-1, 12: six-colour-2, 13: RGB-change-1, 14: RGB-change-2, 15: Green-Red-change, 16: Red-Blue-change, 17: Blue-Green-change, 18: White-flash, 19: Colour-fade, 20: Red-Green-Blue-fade, 21: Green-Red-fade, 22: Red-Blue-fade, 23: Blue-Green-fade, 24: Colour switch-on / fade-out, 25: RGB switch-on / fade-out, 26: White switch-on / fade-out, 27: Green-Red switch-on / fade-out, 28: Red-Blue switch-on / fade-out, 29: Blue-Green switch-on / fade-out, 30: Red switch-on / fade-out, 31: Green switch-on / fade-out, 32: Blue switch-on / fade-out, 33: Custom-RGB-adjust, 34: Auto-run, 35: DMX-512 addressing, 36: DMX-decode.





LED RGB Wireless RF Remotecontrol Play IV — A9915004

Remotecontrol for max. 10 LED RGB receivers

- Colour wheel
- Power ON/OFF
- P for Multisetting
- Brightness + & Brightness -
- Speed + & Speed -
- M Memory for start Flashing
- 10 buttons for 10 groups RGB receivers
- Included USB cable for charging built-in lithium battery





External powersupplyExternal powersupply			
	60120	LED Powersupply	Max. output: 50W, Output voltage: DC 12V
	60121	LED Powersupply	Max. output: 100W, Output voltage: DC 12V
	60122	LED Powersupply	Max. output: 150W, Output voltage: DC 12V
	60123	LED Powersupply	Max. output: 200W, Output voltage: DC 12V
	60124	LED Powersupply	Max. output: 350W, Output voltage: DC 12V
	60110	LED Powersupply	Max. output: 50W, Output voltage: DC 24V
	60111	LED Powersupply	Max. output: 100W, Output voltage: DC 24V
	60112	LED Powersupply	Max. output: 150W, Output voltage: DC 24V
	60113	LED Powersupply	Max. output: 200W, Output voltage: DC 24V
	60114	LED Powersupply	Max. output: 350W, Output voltage: DC 24V


LED RGB Wireless RF Receiver Play IV — A9915006

Max. Output: 3x 3A
(Red-out: 3A / Green-out: 3A / Blue-out: 3A)

- 12V: 108W (3x 36W)
- 24V: 216W (3x 72W)





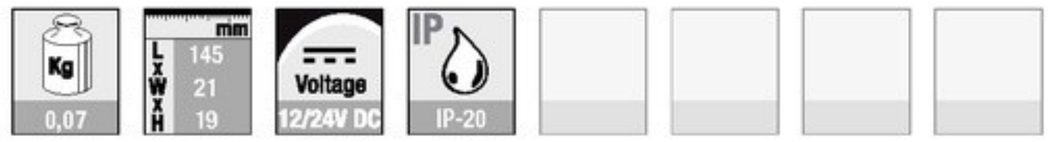

External powersupply			
	60120	LED Powersupply	Max. output: 50W, Output voltage: DC 12V
	60121	LED Powersupply	Max. output: 100W, Output voltage: DC 12V
	60122	LED Powersupply	Max. output: 150W, Output voltage: DC 12V
	60123	LED Powersupply	Max. output: 200W, Output voltage: DC 12V
	60124	LED Powersupply	Max. output: 350W, Output voltage: DC 12V
	60110	LED Powersupply	Max. output: 50W, Output voltage: DC 24V
	60111	LED Powersupply	Max. output: 100W, Output voltage: DC 24V
	60112	LED Powersupply	Max. output: 150W, Output voltage: DC 24V
	60113	LED Powersupply	Max. output: 200W, Output voltage: DC 24V
	60114	LED Powersupply	Max. output: 350W, Output voltage: DC 24V

Accessories

LED Wireless (RF) RGB Controller **A9915020**

Max. Output: 3x 5A (Red-out: 5A /Green-out: 5A / Blue-out: 5A)

External powersupply			
	**60120**	LED Powersupply	Max. output: 50W, Output voltage: DC 12V
	60121	LED Powersupply	Max. output: 100W, Output voltage: DC 12V
	60122	LED Powersupply	Max. output: 150W, Output voltage: DC 12V
	60123	LED Powersupply	Max. output: 200W, Output voltage: DC 12V
	60124	LED Powersupply	Max. output: 350W, Output voltage: DC 12V
	60110	LED Powersupply	Max. output: 50W, Output voltage: DC 24V
	60111	LED Powersupply	Max. output: 100W, Output voltage: DC 24V
	60112	LED Powersupply	Max. output: 150W, Output voltage: DC 24V
	60113	LED Powersupply	Max. output: 200W, Output voltage: DC 24V
	60114	LED Powersupply	Max. output: 350W, Output voltage: DC 24V






LED RGB DMX Controller **A9915011**

Max. Output 3x5A - 3 (RGB) Channels

External powersupply			
	**60120**	LED Powersupply	Max. output: 50W, Output voltage: DC 12V
	60121	LED Powersupply	Max. output: 100W, Output voltage: DC 12V
	60122	LED Powersupply	Max. output: 150W, Output voltage: DC 12V
	60123	LED Powersupply	Max. output: 200W, Output voltage: DC 12V
	60124	LED Powersupply	Max. output: 350W, Output voltage: DC 12V
	60110	LED Powersupply	Max. output: 50W, Output voltage: DC 24V
	60111	LED Powersupply	Max. output: 100W, Output voltage: DC 24V
	60112	LED Powersupply	Max. output: 150W, Output voltage: DC 24V
	60113	LED Powersupply	Max. output: 200W, Output voltage: DC 24V
	60114	LED Powersupply	Max. output: 350W, Output voltage: DC 24V



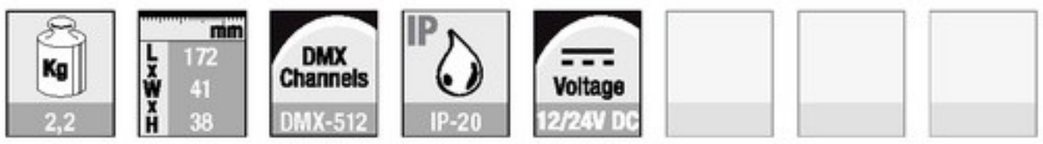


LED RGB repeater/booster 180/360Watt **A9915012**

Max. Output: 3x 5A (Red-out: max. 5A / Green-out: max. 5A / Blue-out: max. 5A)
12V: 180W (3x max. 60W)
24V: 360W (3x max. 120W)

External powersupply			
	**60120**	LED Powersupply	Max. output: 50W, Output voltage: DC 12V
	60121	LED Powersupply	Max. output: 100W, Output voltage: DC 12V
	60122	LED Powersupply	Max. output: 150W, Output voltage: DC 12V
	60123	LED Powersupply	Max. output: 200W, Output voltage: DC 12V
	60124	LED Powersupply	Max. output: 350W, Output voltage: DC 12V
	60110	LED Powersupply	Max. output: 50W, Output voltage: DC 24V
	60111	LED Powersupply	Max. output: 100W, Output voltage: DC 24V
	60112	LED Powersupply	Max. output: 150W, Output voltage: DC 24V
	60113	LED Powersupply	Max. output: 200W, Output voltage: DC 24V
	60114	LED Powersupply	Max. output: 350W, Output voltage: DC 24V



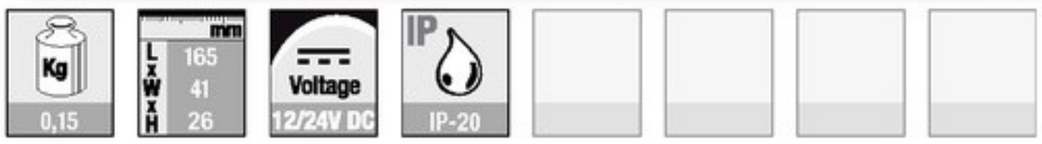

Accessories



ColorDrive 1 — 42636

Electrical:	AC 100-240V~50/60Hz 58W
Functions:	Auto Programs Custom Programs Static Play Calibration RGB work mode White work mode
Operation:	DMX 512 Master/Slave Stand alone Indoor use

ColorDrive 4 — 42634

Voltage:	AC100-240V, 50/60Hz
Power Consumption:	250W
Output line:	4 Lines
Output Current:	350mA per color
Output per line:	48 x 1W LED (12W per color)
Total Output:	192 x 1W LED (48W per color)
Control:	DMX512
DMX Channels:	3CGS/ 4CHS/ 5CHS/ 10CHS/ 15CHS 17CHS/ 20CHS/ 22CHS
Operation:	DMX, Master/Slave. Stand-alone
Functions:	RGB calibration, RGB to White, Play schedule, Static
Built-in Programs:	40
Custom Programs:	5
DMX Connection:	RJ45/XLR
Display:	LCD
Ambient Temperature:	-20°C/+40°C
Dimensions:	290 x 220 x 57 mm
Weight:	2 kg

Dedicated Controller for:
42637 ColorStrip 12
42638 ColorStrip 24
42639 ColorStrip 12i
42642 ColorStrip 24i
42615 ColorSpot 3 MR-16
42616 ColorSpot 6 MR-16
42617 ColorSpot 12 AR-111





Accessories

LED Powersupply

60120 Max. output: 50W, Output voltage: DC 12V
60110 Max. output: 50W, Output voltage: DC 24V

Power Supply:	AC 110/230V- 50/60 Hz
Power connector:	Terminal
Dimensions:	160 x 96 x 40 mm (LxWxH)
Weight:	0,4 kg

LED Powersupply

60122 Max. output: 150W, Output voltage: DC 12V
60112 Max. output: 150W, Output voltage: DC 24V

Power Supply:	AC 110/230V- 50/60 Hz
Power connector:	Terminal
Dimensions:	200 x 10 x 40 mm (LxWxH)
Weight:	0,6 kg

LED Powersupply

60124 Max. output: 350W, Output voltage: DC 12V
60114 Max. output: 350W, Output voltage: DC 24V

Power Supply:	AC 110/230V- 50/60 Hz
Power connector:	Terminal
Cooling:	Temperature controlled fan
Dimensions:	220 x 110 x 50 mm (LxWxH)
Weight:	1,4 kg

LED Powersupply

60121 Max. output: 100W, Output voltage: DC 12V
60111 Max. output: 100W, Output voltage: DC 24V

Power Supply:	AC 110/230V- 50/60 Hz
Power connector:	Terminal
Dimensions:	200 x 10 x 40 mm (LxWxH)
Weight:	0,45 kg

LED Powersupply

60123 Max. output: 200W, Output voltage: DC 12V
60113 Max. output: 200W, Output voltage: DC 24V

Power Supply:	AC 110/230V- 50/60 Hz
Power connector:	Terminal
Dimensions:	220 x 110 x 50 mm (LxWxH)
Weight:	1,2 kg





Halogen Bulbs

Order-code	Brand	Type	Socket	Volt.	Watt.	Lifetime	Length	Diam.	Col. temp.	Colour	Lumen/Can-dela	Beam/ Angle
80450	Osram	Decostar 35 Titan	GU4	-	20	4000	-	-	3000	-	4000cd	10°
80980	Osram	Decostar 35 Titan	GU4	12	20	4000	37mm	35,3mm	3000	-	700cd	36°
80977	Osram	Decostar 35 Titan	GU4	12	35	4000	37mm	35,3mm	3000	-	6200cd	10°
80978	Osram	Decostar 35 Titan	GU4	12	35	4000	37mm	35,3mm	3000	-	1350cd	36°
80451	Osram	Decostar 51 Titan	GU5.3	12	20	4000	-	-	3000	-	500cd	10°
80979	Osram	Decostar 51 Titan	GU5,3	12	20	4000	45mm	51mm	3000	-	780cd	36°
80452	Osram	Decostar 51 Titan	GU5.3	12	35	4000	-	-	3000	-	9100cd	10°
80453	Osram	Decostar 51 Titan	GU5.3	12	35	4000	-	-	3000	-	3100cd	24°
80454	Osram	Decostar 51 Titan	GU5.3	12	35	4000	-	-	3000	-	1500cd	36°
80412	Osram	Decostar 51 Titan	GU5.3	12	50	4000	-	-	3000	-	2500cd	10°
80413	Osram	Decostar 51 Titan	GU5.3	12	50	4000	-	-	3000	-	4400cd	24°
80990	Osram	Decostar 51 IRC	GU5.3	12	20	5000	-	-	3000	-	6000cd	10°
80991	Osram	Decostar 51 IRC	GU5.3	12	20	5000	-	-	3000	-	2300cd	24°
80992	Osram	Decostar 51 IRC	GU5.3	12	20	5000	-	-	3000	-	1000cd	36°
80993	Osram	Decostar 51 IRC	GU5.3	12	20	5000	-	-	3000	-	450cd	60°
80994	Osram	Decostar 51 IRC	GU5.3	12	35	5000	-	-	3000	-	12500cd	10°
80995	Osram	Decostar 51 IRC	GU5.3	12	35	5000	-	-	3000	-	4400cd	24°
80996	Osram	Decostar 51 IRC	GU5.3	12	35	5000	-	-	3000	-	2200cd	36°
80997	Osram	Decostar 51 IRC	GU5.3	12	35	5000	-	-	3000	-	1100cd	60°
80981	Osram	Decostar 51 IRC	GU5,3	12	50	5000	45mm	51mm	3000	-	15000cd	10°
80982	Osram	Decostar 51 IRC	GU5,3	12	50	5000	45mm	51mm	3000	-	5700cd	24°
80983	Osram	Decostar 51 IRC	GU5,3	12	50	5000	45mm	51mm	3000	-	2850cd	WFL/36°
80984	Osram	Decostar 51 IRC	GU5,3	12	50	5000	45mm	51mm	3000	-	1430cd	60°
80470	Osram	Decostar 51 ALU	GU5.3	-	20	3000	-	-	3000	-	700cd	36°
80471	Osram	Decostar 51 ALU	GU5.3	-	35	3000	-	-	3000	-	1100cd	36°
80472	Osram	Decostar 51 ALU	GU5.3	-	50	3000	-	-	3000	-	1800cd	36°
80425	Osram	Halopar 16 64820	GU10	230	35	2000	55mm	50,7mm	2900	-	950cd	35°
80418	Osram	Halopar 16 64824	GU10	230	50	2000	55mm	50,7mm	2900	-	600cd	35°
84035	Osram	Halopin G9	G-9	230	25	2000	-	-	3000	Clear	260Lm	-
84036	Osram	Halopin G9	G9	230	25	2000	-	-	3000	Frosted	240Lm	-
84030	Osram	Halopin UV-filter	G9	230	40	2000	43mm	14mm	2900	Clear	490Lm	-

VNSP=Very Narrow Spot, NSP=Narrow Spot, SP=Spot, MFL=Medium Flood, FL=Flood, WFL=Wide Flood CRI=Colour Rendering Index Col.temp; in °Kelvin

Halogen Bulbs

Order-code	Brand	Type	Socket	Volt.	Watt.	Lifetime	Length	Diam.	Col. temp.	Colour	Lumen/Can-dela	Beam/ Angle
84031	Osram	Halopin UV-filter	G9	230	40	2000	43mm	14mm	2900	Frosted	460Lm	-
80415	Osram	Halospot 111 IRC UV-filter	G53	12	35	4000	67mm	111mm	3000	Warm white	22500cd	8°
80416	Osram	Halospot 111 IRC UV-filter	G53	12	50	4000	67mm	111mm	3000	Warm white	33000cd	8°
80417	Osram	Halospot 111 IRC UV-filter	G53	12	50	4000	67mm	111mm	3000	-	5800cd	24°
80441	Osram	Halospot 111	G53	12	50	3000	67mm	111mm	3000	warm white	40000cd	4°
80125	Osram	Halospot 111	G53	12	50	3000	67mm	111mm	3000	warm white	20000cd	8°
80126	Osram	Halospot 111	G53	12	50	3000	67mm	111mm	3000	warm white	4000cd	24°
80430	Osram	Halospot 111	G53	12	75	3000	67mm	111mm	-	-	-	SP/8°
80127	Osram	Halospot 111	G53	12	50	3000	67mm	111mm	3000	warm white	1400cd	45°
80431	Osram	Halospot 111	G53	12	75	3000	67mm	111mm	-	-	-	FL/24°
80123	Osram	Halospot 111	G53	12	35	3000	67mm	111mm	3000	warm white	2500cd	24°
80432	Osram	Halospot 111	G53	12	75	3000	67mm	111mm	-	-	-	WFL/45°
80439	Osram	Halospot 111	G53	12	100	3000	67mm	111mm	3000	Warm White	8500cd	FL/24°
80440	Osram	Halospot 111	G53	12	100	3000	67mm	111mm	3000	warm white	2800cd	WFL/45°

VNSP=Very Narrow Spot, NSP=Narrow Spot, SP=Spot, MFL=Medium Flood, FL=Flood, WFL=Wide Flood CRI=Colour Rendering Index Col.temp; in °Kelvin


80977


80412


84035


80472


80418


84031


80430


80440

Lightbulbs


42615


42611


42616


83050


A9990111


42620


42617


42621


83061

LED Bulbs

Ordercode	Brand	Type	Socket	Volt.	Watt.	Lifetime	Length	Diam.	Colour	Beam/Angle
A9990111	Sharp	LED AR-111	G53	12Vdc	7W	-	73,5mm	110,4mm	Warm White	-
42615	Showtec	MR16	RJ45	Controller	3,2	25000	67	50	White	30°
42611	Showtec	MR16	RJ45	Controller	3,2	25000	42	50mm	RGB in one	40°
42616	Showtec	MR16	RJ45	Controller	6,4	25000	95	50	White	30°
42620	Showtec	AR111	RJ45	Controller	12,9	25000	110,8	43,5	RGB	30°
42617	Showtec	AR111	RJ45	Controller	12,9	25000	110,5	50	White	30°
42621	Showtec	AR111	RJ45	Controller	12,9	25000	110,8	50	RGB in one	40°
83061	Showtec	MR16	GU5.3	12V	3x1W	-	51mm	49mm	Warm White	30°
83301	Showtec	MR-16	GU5,3	12V	4W	25000	-	-	3200K	13°
83302	Showtec	MR-16	GU5,3	12V	4W	25000	-	-	3200K	22°
83401	Showtec	MR-16	GU-10	100-230V	4W	25000	-	-	3200K	13°
83402	Showtec	MR-16	GU-10	100-230V	4W	25000	-	-	3200K	22°
83600	Showtec	Par 30	E-27	100-230V	14W	25000	-	-	3200K	25°
83601	Showtec	Par 30	E-27	100-230V	14W	25000	-	-	3200K	45°
83700	Showtec	AR-111	G53 Screw	12V	15W	25000	-	-	3200K	25°
83701	Showtec	AR-111	G53 Screw	12V	15W	25000	-	-	3200K	45°
83050	Showtec	MR11	GU4.0	12V	1x2W	-	45mm	35mm	Warm white	1

VNSP=Very Narrow Spot, NSP=Narrow Spot, SP=Spot, MFL=Medium Flood, FL=Flood, WFL=Wide Flood CRI=Colour Rendering Index Col.temp; in °Kelvin

Metalhalide Bulbs

Ordercode	Brand	Type	Socket	Volt.	Watt.	Lifetime	Length	Diam.	Col.temp.	Lumen/Candela	Colour	Beam/ Angle
80964	Osram	Powerstar HCI	G12	-	150	9000	-	-	4200	14500Lm	Neutral white	-
80965	Osram	Powerstar HCI	G12	-	150	9000	-	-	3000	15500Lm	Warm White	-
81335	Osram	Powerstar HQI-E/P	E40	-	250	9000	-	-	4200	17000Lm	Coated	-
81336	Osram	Powerstar HQI-E/P	E40	-	400	9000	-	-	4200	31000Lm	Coated	-
81325	Osram	Powerball HCI-E/P	E27	-	75	-	138mm	54mm	3000	6500Lm	Clear	-
81326	Osram	Powerball HCI-E/P	E27	-	75	-	138mm	54mm	3000	6400Lm	Coated	-
81327	Osram	Powerball HCI-E/P	E27	-	75	-	138mm	54mm	4200	6100Lm	Clear	-
81328	Osram	Powerball HCI-E/P	E27	-	75	-	138mm	54mm	4200	6000Lm	Coated	-
81330	Osram	Powerball UV-filter	E27	-	150	-	138mm	54mm	3000	14000Lm	Clear	-
81331	Osram	Powerball HCI-E/P	E27	-	150	-	138mm	54mm	3000	13300Lm	Coated	-
81332	Osram	Powerball HCI-E/P	E27	-	150	-	138mm	54mm	4200	14000Lm	Clear	-
81333	Osram	Powerball HCI-E/P	E27	-	150	-	138mm	54mm	4200	13300Lm	Coated	-
85059	Philips	Master Colour CDM-R111	GX8,5	ballast	20	6000	95mm	111mm	3000	20000cd	Warm white	10°
85060	Philips	Master Colour CDM-R111	GX8,5	ballast	20	5000	95mm	111mm	3000	4500cd	Warm white	24°
85064	Philips	Master Colour CDM-R111	GX8,5	ballast	35	7000	95mm	111mm	4200	35000cd	Cool white	10°
85061	Philips	Master Colour CDM-R111	GX8,5	ballast	35	6000	95mm	111mm	3000	35000cd	Warm white	10°
85065	Philips	Master Colour CDM-R111	GX8,5	ballast	35	7000	95mm	111mm	4200	8500cd	Cool white	24°
85062	Philips	Master Colour CDM-R111	GX8,5	ballast	35	6000	95mm	111mm	3000	8500cd	Warm white	24°
85066	Philips	Master Colour CDM-R111	GX8,5	ballast	35	7000	95mm	111mm	4200	4000cd	Cool white	40°
85063	Philips	Master Colour CDM-R111	GX8,5	ballast	35	6000	95mm	111mm	3000	4000cd	Warm white	40°
85067	Philips	Master Colour CDM-R111	GX8,5	ballast	70	7500	95mm	111mm	3000	50000cd	Warm white	10°
85070	Philips	Master Colour CDM-R111	GX8,5	ballast	70	4000	95mm	111mm	4200	50000cd	Cool white	10°
85068	Philips	Master Colour CDM-R111	GX8,5	ballast	70	7500	95mm	111mm	3000	15000cd	Warm white	24°
85071	Philips	Master Colour CDM-R111	GX8,5	ballast	70	4000	95mm	111mm	4200	15000cd	Cool white	24°
85069	Philips	Master Colour CDM-R111	GX8,5	ballast	70	7500	95mm	111mm	3000	9000cd	Warm white	40°

VNSP=Very Narrow Spot, NSP=Narrow Spot, SP=Spot, MFL=Medium Flood, FL=Flood, WFL=Wide Flood CRI=Colour Rendering Index Col.temp; in °Kelvin



83301



83402



83601



83701

Lightbulbs

Metalhalide Bulbs

Ordercode	Brand	Type	Socket	Volt.	Watt.	Lifetime	Length	Diam.	Col.temp.	Lumen/Candela	Colour	Beam/ Angle
85072	Philips	Master Colour CDM-R111	GX8,5	ballast	70	4000	95mm	111mm	4200	9000cd	Cool white	40°
84060	Osram	Powerball UV-filter	G12	-	35	12000	100mm	19mm	4200	3300Lm	-	-
81300	Osram	Powerball UV-filter	G12	-	35		100mm	19mm	3000	34000Lm	Warm white	-
81301	Osram	Powerball Shoplight UV-filter	G12	-	35	-	100mm	19mm	3000	3100Lm	Warm white	-
84065	Osram	Powerball UV-filter	G12	-	70	12000	100mm	19mm	4200	6700Lm	-	-
84066	Osram	Powerball UV-filter	G12	-	70	12000	100mm	19mm	3000	6400Lm	-	-
81312	Osram	Powerball UV-filter	RX7s	-	70	-	114,2mm	57mm	5200	5500Lm	Daylight	-
81311	Osram	Powerball UV-filter	RX7s	-	70	-	114,2mm	21mm	4200	6700Lm	White	-
81310	Osram	Powerball UV-filter	RX7s	-	70	-	114,2mm	21mm	3000	6900Lm	Warm white	-
84068	Osram	Powerball UV-filter HCI-R111	GX8,5	-	70	-	95mm	111mm	3000	15000cd	-	24°
84069	Osram	Powerball UV-filter HCI-R111	GX8,5	-	70	-	95mm	111mm	3000	9000cd	-	40°
84067	Osram	Powerball UV-filter HCI-R111	GX8,5	-	72	-	95mm	111mm	3000	55000cd	-	10°
81340	Osram	Powerball HCI-TF UV-filter	GU6,5	-	20	-	57mm	13mm	3000	1700Lm	-	-
81322	Osram	Powerball UV-filter	RX7s-24	-	150	-	132mm	66mm	5200	12000Lm	Daylight	-
81321	Osram	Powerball UV-filter	RX7s-24	-	144	-	132mm	24mm	4200	12000Lm	White	-
81320	Osram	Powerball UV-filter	RX7s-24	-	144	-	132mm	24mm	3000	11700Lm	Warm white	-

VNSP=Very Narrow Spot, NSP=Narrow Spot, SP=Spot, MFL=Medium Flood, FL=Flood, WFL=Wide Flood CRI=Colour Rendering Index Col.temp; in °Kelvin

Fluorescent Bulbs/Tubes

Ordercode	Brand	Type	Socket	Volt.	Watt.	Lifetime	Length	Diam.	Col.temp.	Lumen	Colour
84053	Osram	Dulux D	G24d-1	-	10	8000	87mm	-	4000	600	Cool white
84054	Osram	Dulux D	G24d-1	-	10	8000	87mm	-	3000	600	Warm white
84055	Osram	Dulux D	G24d-1	-	10	8000	87mm	-	2700	600	Interna
84040	Osram	Dulux D	G24d-1	-	13	8000	115mm	-	4000	900	Cool white
84041	Osram	Dulux D	G24d-1	-	13	8000	115mm	-	3000	900	Warm white
84042	Osram	Dulux D	G24d-1	-	13	8000	115mm	-	2700	900	Interna
84050	Osram	Dulux D	G24d-2	-	18	8000	130mm	-	4000	1200	Cool white
84051	Osram	Dulux D	G24d-2	-	18	8000	130mm	-	3000	1200	Warm white
84052	Osram	Dulux D	G24d-2	-	18	8000	130mm	-	2700	1200	Interna
84056	Osram	Dulux D	G24d-3	-	26	8000	149mm	-	4000	1800	Cool white
84057	Osram	Dulux D	G24d-3	-	26	8000	149mm	-	3000	1800	Warm white

VNSP=Very Narrow Spot, NSP=Narrow Spot, SP=Spot, MFL=Medium Flood, FL=Flood, WFL=Wide Flood CRI=Colour Rendering Index Col.temp; in °Kelvin

Fluorescent Bulbs/Tubes

Ordercode	Brand	Type	Socket	Volt.	Watt.	Lifetime	Length	Diam.	Col.temp.	Lumen	Colour
84058	Osram	Dulux D	G24d-3	-	26	8000	149mm	-	2700	1800	Interna
84092	Osram	Dulux-L	2G11	230	24	15000	317mm	17,5mm	4000	1800Lm	Cool White
84093	Osram	Dulux-L	2G11	230	24	15000	317mm	17,5mm	3000	1800Lm	Warm white
84113	Osram	Dulux T/E Plus	GX24Q-3	-	32	13000	147mm	45mm	4000	2400	Cool white
84114	Osram	Dulux T/E Plus	GX24Q-3	-	32	13000	147mm	45mm	3000	2400	Warm white
84115	Osram	Dulux T/E Plus	GX24Q-3	-	32	13000	147mm	45mm	2700	2400	Interna
84116	Osram	Dulux EL Longlife	E27	-	15	15000	145mm	45mm	2700	900	Warm white
84118	Osram	Dulux EL Longlife	E27	-	18	15000	145mm	45mm	2700	1100	Interna
84019	Osram	Lumilux T5	G5	-	28	24000	1149mm	16mm	6500	2400	Cool Daylight
84020	Osram	Lumilux T5	G5	-	28	24000	1149mm	16mm	4000	2600	Cool white R/A 80-89
84021	Osram	Lumilux T5	G5	-	28	24000	1149mm	16mm	3500	2600	White R/A 80-89
84022	Osram	Lumilux T5	G5	-	28	24000	1149mm	16mm	3000	2600	Warm white R/A 80-89
84023	Osram	Lumilux T5	G5	-	28	24000	-	-	2700	2600	Interna
84024	Osram	Lumilux T5	G5	-	35	24000	-	-	6500	3050	Cool Daylight
84025	Osram	Lumilux T5	G5	-	35	24000	-	-	4000	3300	Cool White
84026	Osram	Lumilux T5	G5	-	35	24000	-	-	3500	3300	White
84027	Osram	Lumilux T5	G5	-	35	24000	-	-	3000	3300	Warm White
84028	Osram	Lumilux T5	G5	-	35	24000	-	-	2700	3300	Interna
84130	Osram	Lumilux T5	G5	-	54	24000	-	-	8000	4000	Sky White
84131	Osram	Lumilux T5	G5	-	54	24000	-	-	6500	4050	Cool Daylight
84132	Osram	Lumilux T5	G5	-	54	24000	-	-	4000	4450	Cool White
84133	Osram	Lumilux T5	G5	-	54	24000	-	-	3500	4450	White
84134	Osram	Lumilux T5	G5	-	54	24000	-	-	3000	4450	Warm White
84135	Osram	Lumilux T5	G5	-	54	24000	1149mm	16mm	2700	4450	Interna

VNSP=Very Narrow Spot, NSP=Narrow Spot, SP=Spot, MFL=Medium Flood, FL=Flood, WFL=Wide Flood CRI=Colour Rendering Index Col.temp; in °Kelvin



84053



84092



84113



84026



84134

Characteristics

Characteristics

All Artecta luminaires have different characteristics and needs of various electronic gear.
Also the lighting sources have varying properties which you can find in the next tables of characteristics!

Office Lights - Pendant

Order code	Product name	Power	Socket	ZVEI
A0120135	KANSAS-135	35W	G5	T16
A0120154	KANSAS-154	54W	G5	T16
A0120235	OREGON-235	35W	G5	T16
A0120254	OREGON-254	2x 54W	G5	T16
A0121135	KANSAS-135L	35W	G5	T16
A0121154	KANSAS-154L	54W	G5	T16
A0122135	TULSA-135	35W	G5	T16
A0123135	TULSA-135L	35W	G5	T16
A0121235	PHOENIX-235	2x 35W	G5	T16
A0121254	PHOENIX-254	2x 54W	G5	T16
A0121335	ORLANDO-335	3x 35W	G5	T16
A0121354	ORLANDO-354	3x 54W	G5	T16

* : Built-in ! : Necessary O : Optional

Office Lights - Pole

Order code	Product name	Power	Socket	ZVEI
A0420128	Memphis-128ST	28W	G5	T16
A0421135	Tucson-135ST	35W	G5	T16

* : Built-in ! : Necessary O : Optional

Down Lights - Pendant

Order code	Product name	Power	Socket	ZVEI
A0122070	DOMBURG-TR70	70W	E27	HIE
A0122150	DOMBURG-TR150	150W	E27	HIE
A0122250	DOMBURG-TR250	250W	E40	HIE
A0122400	DOMBURG-TR400	400W	E40	HIE
A0123070	DOMBURG AL-70	70W	E27	HIE
A0123150	DOMBURG-AL150	150W	E27	HIE
A0123250	DOMBURG-AL250	250W	E40	HIE
A0123400	DOMBURG-AL400	400W	E40	HIE
A0125001	CORDOBA-1WW	1x 3W	pcb	LED
A0125002	CORDOBA-2WW	1x 3W	pcb	LED
A0125003	CORDOBA-3WW	1x 1W	pcb	LED

* : Built-in ! : Necessary O : Optional

Characteristics

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	T5	TL5	*					
	T5	TL5	*					

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	HCI-E/P	CDO-ET	*					
	HCI-E/P	x	*					
	HQI-E/P	HPI-E	*					
	HQI-E/P	HPI-E	*					
	HCI-E/P	CDO-ET	*					
	HCI-E/P	x	*					
	HQI-E/P	HPI-E	*					
	HQI-E/P	HPI-E	*					
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		

Characteristics

Down Lights - Recessed				
Order code	Product name	Power	Socket	ZVEI
A0130101	DENVER-S	up to 35W	GU4	QR-CBC35
A0130102	DENVER-M	up to 50W	GU5,3 + GU10	QR-CBC51
A0130201	SEATTLE-S	up to 35W	GU4	QR-CBC35
A0130202	SEATTLE-M	up to 50W	GU5,3 + GU10	QR-CBC51
A0130301	VANCOUVER-S	up to 35W	GU4	QR-CBC35
A0130302	VANCOUVER-M	up to 50W	GU5,3 + GU10	QR-CBC51
A0130401	ONTARIO-S	up to 35W	GU4	QR-CBC35
A0130402	ONTARIO-M	up to 50W	GU5,3 + GU10	QR-CBC51
A0130404	NEBRASKA-S	up to 35W	GU4	QR-CBC35
A0130405	NEBRASKA-M	up to 50W	GU5,3 + GU10	QR-CBC51
A0130501	LIVERPOOL-1	up to 35W	GU4	QR-CBC35
A0130502	LIVERPOOL-2	up to 2x 35W	GU4	QR-CBC35
A0130503	LIVERPOOL-3	up to 3x 35W	GU4	QR-CBC35
A0130504	LIVERPOOL-4	up to 4x 35W	GU4	QR-CBC35
A0130506	LIVERPOOL-6	up to 6x 35W	GU4	QR-CBC35
A0130601	MANCHESTER-1	up to 50W	GU5,3	QR-CBC51
A0130602	MANCHESTER-2	up to 2x 50W	GU5,3	QR-CBC51
A0130603	MANCHESTER-3	up to 3x 50W	GU5,3	QR-CBC51
A0130604	MANCHESTER-4	up to 4x 50W	GU5,3	QR-CBC51
A0130606	MANCHESTER-6	up to 6x 50W	GU5,3	QR-CBC51
A0130701	FRANKFURT-1	up to 50W	Gu5,3	QR-CBC51
A0130702	FRANKFURT-2	up to 2x 50W	Gu5,3	QR-CBC51
A0130703	FRANKFURT-3	up to 3x 50W	Gu5,3	QR-CBC51
A0130704	FRANKFURT-4	up to 4x 50W	Gu5,3	QR-CBC51
A0130714	DEHLI-T	70W + up to 2x 50W	GX-8,5 + G53	HIR-CE111
A0130724	DEHLI-D1	up to 2x 50W	G53	QR-LP111
A0130734	DEHLI-S2	70W	GX-8,5	HIR-CE111
A0130744	DEHLI-S1	up to 50W	G53	QR-LP111
A0130750	MADRID-100W	up to 100W	G53	QR-LP111
A0130760	MADRID-7010W	70W	G12	HIT
A0130761	MADRID-7024W	70W	G12	HIT
A0130762	MADRID-7045W	70W	G12	HIT
A0130770	MADRID-13W	13W	G24Q-1	TC-DEL
A0130771	MADRID-18W	18W	G24Q-2	TC-DEL
A0130780	MADRID-27W	up to 75W	E27	QPAR30
A0130781	MADRID-30W	up to 70W	E27	HIPAR-L30
* : Built-in ! : Necessary O : Optional				

Characteristics

	Osram	Philips	Ballast	Trafo	Powersupply	Driver	Controller	LED ready
	Decostar 35	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 35	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 35	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 35	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 35	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 35	Brilliantline		! / 0		0		0
	Decostar 35	Brilliantline		! / 0		0		0
	Decostar 35	Brilliantline		! / 0		0		0
	Decostar 35	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	Decostar 51	Brilliantline		! / 0		0		0
	HCI-R111	CDM-R111	*	*				
	Halospot 111	Masterline 111		*				
	HCI-R111	CDM-R111	*					
	Halospot 111	Masterline 111		*				
	Halospot 111	Masterline 111		0		0		0
	HCI-T	CDM-T	!					
	HCI-T	CDM-T	!					
	HCI-T	CDM-T	!					
	Duluxe D/E	PL-C 4p	!					
	Duluxe D/E	PL-C 4p	!					
	Halopar 30	PAR30						0
	HCI-PAR30	CDM-R PAR30	0					0

Characteristics

Down Lights - Recessed				
Order code	Product name	Power	Socket	ZVEI
A0130950	ALMERIA-R	up to 100W	G53	QR-LP111
A0130951	ALMERIA-SQ	up to 100W	G53	QR-LP111
A0131101	MÜNSTER-26	26W	G24D-3	TC-D
A0131102	MÜNSTER-70	70W	G12	HIT
A0139001	TORONTO-1WW	1W	pcb	LED
A0139002	TORONTO-2WW	2x 1W	pcb	LED
A0139003	TORONTO-3WW	3x 1W	pcb	LED
A0139004	TORONTO-4WW	4x 1W	pcb	LED
A0139801	IOWA-1WW	1W	pcb	LED
A0139802	IOWA-10WW	1W	pcb	LED
A0139803	JAKARTA-3WW	3x 1W	pcb	LED
A0139804	GIRONA-R	1W	pcb	LED
A0139805	GIRONA-SQ	1W	pcb	LED
A0139806	JAKARTA-6WW	6x 1W	pcb	LED
A0139846	MONTREAL-46WW	1W	pcb	LED
A0139856	MONTREAL-56WW	1W	pcb	LED
A0139903	SEOUL-3WW	3x 1W	pcb	LED
A0139906	SEOUL-6WW	6x 1W	pcb	LED
A0139940	HALIFAX-40WW	1W	pcb	LED
A0139946	HALIFAX-46WW	1W	pcb	LED
* : Built-in	! : Necessary	O : Optional		

Down Lights - Surface				
Order code	Product name	Power	Socket	ZVEI
A0110022	COPENHAGEN-2	up to 2x 50W	Gu5,3	QR-CBC51
A0110024	COPENHAGEN-4	up to 4x 50W	Gu5,3	QR-CBC51
A0110026	COPENHAGEN-6	up to 6x 50W	Gu5,3	QR-CBC51
A0110050	STOCKHOLM-3 WW	3x 1W	pcb	LED
A0110051	STOCKHOLM-8 WW	8x 1W	pcb	LED
A0140011	BRISBANE-M	13W	G24D-1	TC-D
A0140012	BRISBANE-L	70W	G12	HIT
A0140021	AUCKLAND-1	up to 35W	GU10	QR-CBC51
A0140022	AUCKLAND-2	up to 2x35W	GU10	QR-CBC51
A0140023	AUCKLAND-3	up to 3x35W	GU10	QR-CBC51
A0140024	AUCKLAND-4	up to 4x35W	GU10	QR-CBC51
* : Built-in	! : Necessary	O : Optional		

Characteristics

	Osram	Philips	Ballast	Trafo	Powersupply	Driver	Controller	LED ready
	Halospot 111	Masterline 111		O		O		O
	Halospot 111	Masterline 111		O		O		O
	Duluxe D	PL-C 2p	*					
	HCI-T	CDM-T	*					
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		

	Osram	Philips	Ballast	Trafo	Powersupply	Driver	Controller	LED ready
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	LED	LED				*		
	LED	LED				*		
	Duluxe D	PL-C 2p	*					
	HCI-T	CDM-T	*					
	Decostar 51	Brilliantline						O
	Decostar 51	Brilliantline						O
	Decostar 51	Brilliantline						O
	Decostar 51	Brilliantline						O

Characteristics

Down Lights - Surface				
Order code	Product name	Power	Socket	ZVEI
A0140027	TOKYO-6WW	6x 1W	pcb	LED
A0140028	SIDNEY-8WW	8x 1W	pcb	LED
A0140030	BANGKOK-8WW	8x 1W	pcb	LED
A0140031	MELBOURNE-1WW	1W	pcb	LED
A0140032	MELBOURNE-2WW	2x 1W	pcb	LED
A0140033	MELBOURNE-3WW	3x 1W	pcb	LED
* : Built-in ! : Necessary O : Optional				

Wall Lights - Recessed				
Order code	Product name	Power	Socket	ZVEI
A0230001	HELSINKI-R	1W	pcb	LED
A0230002	HELSINKI-R-B	1W	pcb	LED
A0230011	HELSINKI-SQ-WW	1W	pcb	LED
A0230012	HELSINKI-SQ-B	1W	pcb	LED
A0230019	BALTIMORE-SQ	3W	pcb	LED
A0230021	HELSINKI-S-WW	1W	pcb	LED
A0230022	HELSINKI-B	1W	pcb	LED
A0230025	OSLO-R-WW	3W	pcb	LED
A0230026	OSLO-SQ-WW	3W	pcb	LED
A0230031	GIRONA-WW	1W	pcb	LED
A0230054	MODENA-S	1W	pcb	LED
A0230056	MODENA-L	1W	pcb	LED
A0230058	TORINO-L	1W	pcb	LED
A0230081	TRENTO-1	2x 1W	pcb	LED
A0230082	TRENTO-2	2x 1W	pcb	LED
A0230220	MADRAS-45R	1W	pcb	LED
A0230221	MADRAS-45SQ	1W	pcb	LED
A0230306	TROMSØ-9 RGB-in one	3x 3W	pcb	LED
A0230606	TROMSØ-18 RGB-in one	6x 3W	pcb	LED
A0230710	BERLIN-2WW	20x 0,7W	pcb	LED
A0230711	BERLIN-2B	20x 0,7W	pcb	LED
A0230720	BERLIN-3WW	24x 0,7W	pcb	LED
A0230721	BERLIN-3B	24x 0,7W	pcb	LED
A0230730	BERLIN-1WW	18x 0,7W	pcb	LED
A0230731	BERLIN-1B	18x 0,7W	pcb	LED
A0230751	BREMEN-1WW	1W	pcb	LED
A0230752	BREMEN-2WW	2x 1W	pcb	LED
* : Built-in ! : Necessary O : Optional				

Characteristics

	Osram	Philips	Ballast	Trafo	Powersupply	Driver	Controller	LED ready
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				!		
	LED	LED				*		
	LED	LED				*		
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				!		
	LED	LED				!		
	LED	LED			!		!	
	LED	LED			!		!	
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		

Characteristics

Wall Lights - Surface				
Order code	Product name	Power	Socket	ZVEI
A0240001	AALBORG-R WW	1W	pcb	LED
A0240002	AALBORG-R-B 1W	1W	pcb	LED
A0240021	AALBORG-SQ-WW	1W	pcb	LED
A0240022	AALBORG-SQ-B 1W	1W	pcb	LED
A0240031	AALBORG-S-WW	1W	pcb	LED
A0240032	AALBORG-S-B 1W	1W	pcb	LED
A0240041	VENICE-S	up to 40W	G9	QT14 G9
A0240042	VENICE-L	up to 50W	GU10	QR-CBC51
A0240051	MALAGA-M	up to 35W	GU10	QR-CBC51
A0240052	MALAGA-L	up to 2x 35W	GU10	QR-CBC51
A0240053	MODENA-S	1W	pcb	LED
A0240055	MODENA-L	1W	pcb	LED
A0240057	TORINO-L	1W	pcb	LED
A0240061	MILOS	up to 40W	G9	QT14 G9
A0240062	VERONA-3WW	3W	pcb	LED
A0240071	MALTA-1	up to 40W	G9	QT14 G9
A0240072	MALTA-2	up to 2x40W	G9	QT14 G9
A0240081	PARMA-1WW	1W	pcb	LED
A0240082	PARMA-2WW	1W	pcb	LED
A0240083	PARMA-3WW	3W	pcb	LED
A0240084	TRENTO-3WW	3W	pcb	LED
A0240091	FLORENCE-1	up to 40W	G9	QT14 G9
A0240092	FLORENCE-2	up to 2x40W	G9	QT14 G9
A0240101	CANNES-1	up to 35W	GU10	QR-CBC51
A0240102	CANNES-2 230V	up to 2x 35W	GU10	QR-CBC51
A0240111	PALLISADE	up to 40W	G9	QT14 G9
A0240120	VALENCIA-S	2x 1W	pcb	LED
A0240121	VALENCIA-M	up to 2x 35W	GU10	QR-CBC51
A0240122	VALENCIA-L	up to 2x50W	GU10	QR-CBC51
A0240125	VALENCIA-XL	up to 2x50W	G53	QR-LP111
A0240131	MEDI-SQ	up to 2x35W	GU10	QR-CBC51
A0240141	RONDO-1	up to 40W	G9	QT14 G9
A0240142	RONDO-2	up to 2x 40W	G9	QT14 G9
A0240151	BERGEN-1	up to 40W	G9	QT14 G9
A0240152	BERGEN-2	up to 2x 40W	G9	QT14 G9
A0240171	ALESUND-1	up to 40W	G9	QT14 G9
* : Built-in ! : Necessary O : Optional				

Characteristics

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	Halopin	Clickline						
	Decostar 51	Brilliantline						
	Decostar 51	Brilliantline						
	Decostar 51	Brilliantline						
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	Halopin	Clickline						
	LED	LED				!		
	Halopin	Clickline						
	Halopin	Clickline						
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	Halopin	Clickline						
	Halopin	Clickline						
	Decostar 51	Brilliantline						
	Decostar 51	Brilliantline						
	Halopin	Clickline						
	LED	LED				*		
	Decostar 51	Brilliantline						
	Decostar 51	Brilliantline						
	Halospot 111	Masterline 111				*		
	Decostar 51	Brilliantline						
	Halopin	Clickline						
	Halopin	Clickline						
	Halopin	Clickline						
	Halopin	Clickline						
	Halopin	Clickline						

Characteristics

Wall Lights - Surface				
Order code	Product name	Power	Socket	ZVEI
A0240172	ALESUND-2	up to 2x 40W	G9	QT14 G9
A0240210	BRUSSELS-60WW	60W	pcb	LED
A0240211	BRUSSELS-60CW	60W	pcb	LED
A0240241	DOVER-M	13W	G24D-1	TC-D
A0240242	DOVER-L	18W	G24D-2	TC-D
A0240243	DOVER-XL	26W	G24D-3	TC-D
A0240251	CALAIS-M	2x 13W	G24D-1	TC-D
A0240252	CALAIS-L	2x 18W	G24D-2	TC-D
A0240253	CALAIS-XL	2x 26W	G24D-3	TC-D
A0240302	TOLEDO-WW	4W	pcb	LED
A0240304	TOLEDO-2WW	3W	pcb	LED
A0240310	BRUSSELS-120WW	120W	pcb	LED
A0240311	BRUSSELS-120CW	120W	pcb	LED
A0240314	DUBLIN-S	14W	G5	T16
A0240321	DUBLIN-M	21W	G5	T16
A0240328	DUBLIN-L	28W	G5	T16
A0240400	GLASGOW-9WW	9x 1W	pcb	LED
A0240401	GLASGOW-9CW	9x 1W	pcb	LED
A0240410	GLASGOW-27WW	9x 3W	pcb	LED
A0240411	GLASGOW-27CW	9x 3W	pcb	LED
A0240440	GLASGOW-3RGB	9x 3W	pcb	LED
A0240445	GLASGOW-6RGB	18x 3W	pcb	LED
A0240500	PISA-SQ	25W	G9	QT14 G9
A0240501	PISA-R	25W	G9	QT14 G9
A0240512	GRANADA-WW	4W	pcb	LED
A0240522	ZARAGOZA-WW	4W	pcb	LED
A0240610	ALABAMA-1WW	3W	pcb	LED
A0240620	ALABAMA-2WW	2x 3W	pcb	LED
A0240630	ALABAMA-2A	2x 1W	pcb	LED
A0240640	ALABAMA-3SQ	3W	pcb	LED
A0240641	ALABAMA-3R	1W	pcb	LED
A0240710	CHICAGO-1WW	1W	pcb	LED
A0240720	CHICAGO-2WW	2x 1W	pcb	LED
A0240730	CHICAGO-2AWW	2x 1W	pcb	LED
A0240810	DETROIT-1WW	1W	pcb	LED
A0240820	DETROIT-2WW	2x 1W	pcb	LED
* : Built-in ! : Necessary O : Optional				

Characteristics

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	Halopin	Clickline						
	LED	LED				*		
	LED	LED				*		
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	T5	TL5	*					
	T5	TL5	*					
	T5	TL5	*					
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED			!		!	
	LED	LED			!		!	
	Halopin	Clickline						
	Halopin	Clickline						
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		

Characteristics

Wall Lights - Surface				
Order code	Product name	Power	Socket	ZVEI
A0240830	DETROIT-3WW	3x 1W	pcb	LED
A0240840	DETROIT-4WW	2x 3W	pcb	LED
A0240850	DETROIT-5WW	3W	pcb	LED
A0240910	Cleveland-4WW	4x 1W	pcb	LED
A0240920	Cleveland-8WW	8x 1W	pcb	LED
A0245101	YOSEMITE-Wall	18W	G24D-2	TC-D
A0245102	RICHMOND-Wall	18W	G24D-2	TC-D
A0245103	GREENWAY-Wall	16W	E27	TC-TSE
A0245104	VERMONT-Wall	18W + 3W	G24D-2 + pcb	TC-D + LED
A0245140	DAYTONA-WALL WW	3W	pcb	LED
A0245210	DAKOTA-2	24W	2G11	TC-L
* : Built-in ! : Necessary O : Optional				

Track Lights 1-Phase				
Order code	Product name	Power	Socket	ZVEI
A0320011	NEW YORK-B	up to 50W	GU5,3	QR-CBC51
A0320012	NEW YORK-W	up to 50W	GU5,3	QR-CBC51
A0320013	NEW YORK-S	up to 50W	GU5,3	QR-CBC51
A0320021	LONDON-B	up to 50W	GU5,3	QR-CBC51
A0320022	LONDON-W	up to 50W	GU5,3	QR-CBC51
A0320023	LONDON-S	up to 50W	GU5,3	QR-CBC51
A0320031	PARIS-B	up to 50W	GU5,3	QR-CBC51
A0320032	PARIS-W	up to 50W	GU5,3	QR-CBC51
A0320033	PARIS-S	up to 50W	GU5,3	QR-CBC51
A0320041	BARCELONA-B	up to 50W	G53	QR-LP111
A0320042	BARCELONA-W	up to 50W	G53	QR-LP111
A0320043	BARCELONA-S	up to 50W	G53	QR-LP111
* : Built-in ! : Necessary O : Optional				

Characteristics

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe EL	PL-E	*					
	Duluxe D + LED	PL-C 2p + LED	*			*		
	LED	LED	*					
	Duluxe L	PL-L 4p	*					

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Halospot 111	Masterline 111		*				
	Halospot 111	Masterline 111		*				
	Halospot 111	Masterline 111		*				

Characteristics

Track Lights 3-Phase				
Order code	Product name	Power	Socket	ZVEI
A0340031	MILANO-3B70	70W	GX8,5	HIPAR111
A0340032	MILANO-3W70	70W	GX8,5	HIPAR111
A0340033	MILANO-3S70	70W	GX8,5	HIPAR111
A0340041	MILANO 3B100	up to 100W	G53	QR-LP111
A0340042	MILANO 3W100	up to 100W	G53	QR-LP111
A0340043	MILANO 3S100	up to 100W	G53	QR-LP111
A0340061	PALERMO-3B10	20W	GU6,5	HIT
A0340062	PALERMO-3W10	20W	GU6,5	HIT
A0340063	PALERMO-3S10	20W	GU6,5	HIT
A0340071	PALERMO-3B45	20W	GU6,5	HIT
A0340072	PALERMO-3W45	20W	GU6,5	HIT
A0340073	PALERMO-3S45	20W	GU6,5	HIT
A0340151	MONACO-3B10	35W	G12	HIT
A0340152	MONACO-3W10	35W	G12	HIT
A0340153	MONACO-3S10	35W	G12	HIT
A0340161	MONACO-3B45	35W	G12	HIT
A0340162	MONACO-3W45	35W	G12	HIT
A0340163	MONACO-3S45	35W	G12	HIT
A0340171	MONACO-4B10	70W	G12	HIT
A0340172	MONACO-4W10	70W	G12	HIT
A0340173	MONACO-4S10	70W	G12	HIT
A0340181	MONACO-4B45	70W	G12	HIT
A0340182	MONACO-4W45	70W	G12	HIT
A0340183	MONACO-4S45	70W	G12	HIT
A0340211	ZÜRICH-1B	70W	RX7s	HIT-DE
A0340212	ZÜRICH-1W	70W	RX7s	HIT-DE
A0340213	ZÜRICH-1S	70W	RX7s	HIT-DE
A0340221	ZÜRICH-2B	150W	RX7s	HIT-DE
A0340222	ZÜRICH-2W	150W	RX7s	HIT-DE
A0340223	ZÜRICH-2S	150W	RX7s	HIT-DE
A0340251	NAPOLI MR-16 B	up to 50W	GU5,3	QR-CBC51
A0340252	NAPOLI MR-16 W	up to 50W	GU5,3	QR-CBC51
A0340253	NAPOLI MR-16 S	up to 50W	GU5,3	QR-CBC51
A0340261	NAPOLI 20 B	20W	GU6,5	HIT
A0340262	NAPOLI 20 W	20W	GU6,5	HIT
A0340263	NAPOLI 20 S	20W	GU6,5	HIT
* : Built-in ! : Necessary O : Optional				

Characteristics

Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
HCI-R111	CDM-R111	*					
HCI-R111	CDM-R111	*					
HCI-R111	CDM-R111	*					
Halospot 111	Masterline 111		*				
Halospot 111	Masterline 111		*				
Halospot 111	Masterline 111		*				
HCI-TF		*					
HCI-TF		*					
HCI-TF		*					
HCI-TF		*					
HCI-TF		*					
HCI-TF		*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-T	CDM-T	*					
HCI-TS	CDM-TD	*					
HCI-TS	CDM-TD	*					
HCI-TS	CDM-TD	*					
HCI-TS	CDM-TD	*					
HCI-TS	CDM-TD	*					
HCI-TS	CDM-TD	*					
Decostar 51	Brilliantline		*				
Decostar 51	Brilliantline		*				
Decostar 51	Brilliantline		*				
HCI-TF		*					
HCI-TF		*					
HCI-TF		*					

Characteristics

Track Lights 3-Phase				
Order code	Product name	Power	Socket	ZVEI
A0340311	MONZA-20 B	20W	GU6,5	HIT
A0340312	MONZA-20 W	20W	GU6,5	HIT
A0340313	MONZA-20 S	20W	GU6,5	HIT
A0340321	MONZA-35 B	35W	GX8,5	HIPAR111
A0340322	MONZA-35 W	35W	GX8,5	HIPAR111
A0340323	MONZA-35 S	35W	GX8,5	HIPAR111
A0340331	MONZA-70 B	70W	GX8,5	HIPAR111
A0340332	MONZA-70 W	70W	GX8,5	HIPAR111
A0340333	MONZA-70 S	70W	GX8,5	HIPAR111
A0340431	MONZA -111 B	up to 100W	G53	QR-LP111
A0340432	MONZA -111 W	up to 100W	G53	QR-LP111
A0340433	MONZA -111 S	up to 100W	G53	QR-LP111
* : Built-in ! : Necessary O : Optional				

Inground Lights 230Vac				
Order code	Product name	Power	Socket	ZVEI
A0520071	MONROE-21WW	10x0,1W	pcb	LED
A0520072	MONROE-22WW	20x0,1W	pcb	LED
A0520073	MONROE-24WW	24x0,1W	pcb	LED
A0520201	VEGAS-1WW	3W	pcb	LED
A0520202	VEGAS-3WW	3x 3W	pcb	LED
A0520301	DALLAS-7WW	7x 1W	pcb	LED
A0520302	DALLAS-21WW	7x 3W	pcb	LED
A0520401	UTAH-12 WW	12x 1W	pcb	LED
A0520402	UTAH-36 WW	12x 3W	pcb	LED
A0520451	VICTORIA-WW	10x0,1W	pcb	LED
A0520461	OTTAWA-WW	3W	pcb	LED
A0520462	OTTAWA-B	3W	pcb	LED
A0520471	CALGARY-W	3W	pcb	LED
A0520500	TAMPA-1WW	3W	pcb	LED
A0520501	TAMPA-3WW	3x 1W	pcb	LED
A0520502	TAMPA-6WW	6x 1W	pcb	LED
* : Built-in ! : Necessary O : Optional				

Characteristics

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	HCI-TF		*					
	HCI-TF		*					
	HCI-TF		*					
	HCI-R111	CDM-R111	*					
	HCI-R111	CDM-R111	*					
	HCI-R111	CDM-R111	*					
	HCI-R111	CDM-R111	*					
	HCI-R111	CDM-R111	*					
	HCI-R111	CDM-R111	*					
	Halospot 111	Masterline 111		*				
	Halospot 111	Masterline 111		*				
	Halospot 111	Masterline 111		*				

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		

Characteristics

Inground Lights 24Vdc				
Order code	Product name	Power	Socket	ZVEI
A0520010	MIAMI-1WW	1W	pcb	LED
A0520011	MIAMI-1B	1W	pcb	LED
A0520012	MIAMI-3WW	3W	pcb	LED
A0520013	MIAMI-3B	3W	pcb	LED
A0520014	MIAMI-3RGB	3W	pcb	LED
A0520015	MIAMI-10WW	1W	pcb	LED
A0520016	MIAMI-10B	1W	pcb	LED
A0520017	MIAMI-30WW	3W	pcb	LED
A0520018	MIAMI-30B	3W	pcb	LED
A0520019	MIAMI-30RGB	3W	pcb	LED
A0520101	MONTANA-1WW	1W	pcb	LED
A0520102	MONTANA-1B	1W	pcb	LED
A0520111	MONTANA-2WW	1W	pcb	LED
A0520112	MONTANA-2B	1W	pcb	LED
A0520120	MONTANA-3RGB	3W	pcb	LED
A0520130	MONTANA-4RGB	3W	pcb	LED
A0520203	VEGAS-RGB	3x 3W	pcb	LED
A0520303	DALLAS-RGB	6x 3W	pcb	LED
A0520403	UTAH-36 RGB	12x 3W	pcb	LED
A0520463	OTTAWA-2RGB	1x 1,5W	pcb	LED
A0520473	CALGARY-RGB	1x 3W	pcb	LED
A0520007	MONROE-MINI-1	1W	pcb	LED
A0520008	MONROE-MINI-2	1W	pcb	LED
A0520009	MONROE-MINI-3	1W	pcb	LED
* : Built-in ! : Necessary O : Optional				

Underwater Lights Recessed				
Order code	Product name	Power	Socket	ZVEI
A0620010	SALZBURG-1WW	3W	pcb	LED
A0620013	SALZBURG-1RGB	3W	pcb	LED
A0620020	SALZBURG-7WW	7x 1W	pcb	LED
A0620021	SALZBURG-7B	7x 1W	pcb	LED
A0620030	SALZBURG-9WW	9x 1W	pcb	LED
A0620031	SALZBURG-9B	9x 1W	pcb	LED
A0620043	SALZBURG-RGB	9x 1W	pcb	LED
A0620044	SALZBURG-3RGB	9x 3W	pcb	LED
* : Built-in ! : Necessary O : Optional				

Characteristics

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	LED	LED			!			
	LED	LED			!			
	LED	LED			!			
	LED	LED			!			
	LED	LED			!		!	
	LED	LED			!			
	LED	LED			!			
	LED	LED			!			
	LED	LED			!			
	LED	LED			!			
	LED	LED			!		!	
	LED	LED			!		!	
	LED	LED					!	
	LED	LED					!	
	LED	LED					!	
	LED	LED					!	
	LED	LED					!	
	LED	LED				!		
	LED	LED				!		
	LED	LED				!		

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	LED	LED			!			
	LED	LED			!		!	
	LED	LED			!			
	LED	LED			!			
	LED	LED			!			
	LED	LED			!			
	LED	LED			!		!	
	LED	LED			!		!	

Characteristics

Underwater Lights Surface				
Order code	Product name	Power	Socket	ZVEI
A0620050	IBIZA 6WW	6x 1W	pcb	LED
A0620051	IBIZA 6B	6x 1W	pcb	LED
A0620063	IBIZA-6RGB	6x 1W	pcb	LED
A0620064	IBIZA-RGB	6x 1,5W	pcb	LED
A0620072	DUBAI-1RGB	9x 3W	pcb	LED
A0620074	DUBAI-2RGB	9x 3W	pcb	LED
* : Built-in ! : Necessary O : Optional				

Garden Lights 230Vac				
Order code	Product name	Power	Socket	ZVEI
A0720009	ESSEX-2-15WW	5x 3W	pcb	LED
A0720013	CARDIFF-R	50x 0,05W	pcb	LED
A0720014	CARDIFF-G	50x 0,05W	pcb	LED
A0720015	CARDIFF-B	50x 0,05W	pcb	LED
A0720016	CARDIFF-Y	50x 0,05W	pcb	LED
A0720017	CARDIFF-WW	50x 0,05W	pcb	LED
A0720103	SEVILLA LED-WW	3W	pcb	LED
A0720113	SEVILLA LED-BLUE	3W	pcb	LED
A0720140	SEVILLA G9 Max 40W	up to 40W	G9	
A0720151	MARBELLA-1WW	3W	pcb	LED
A0720152	MARBELLA-2WW	3W	pcb	LED
A0730101	YOSEMITE-R	10W	G24D-1	TC-D
A0730102	RICHMOND-R	10W	G24D-1	TC-D
A0730105	QUEBEC-2	2x 3W	pcb	LED
A0730108	LYON-1	3x 1W	pcb	LED
A0730109	LYON-2	3x 1W	pcb	LED
A0730110	YOSEMITE-40cm	18W	G24D-2	TC-D
A0730111	YOSEMITE-60cm	18W	G24D-2	TC-D
A0730112	YOSEMITE-90cm	18W	G24D-2	TC-D
A0730113	YOSEMITE-120cm	18W	G24D-2	TC-D
A0730120	RICHMOND 40cm	18W	G24D-2	TC-D
A0730121	RICHMOND 60cm	18W	G24D-2	TC-D
A0730122	RICHMOND 90cm	18W	G24D-2	TC-D
A0730123	RICHMOND 120cm	18W	G24D-2	TC-D
A0730130	GREENWAY 40cm	18W	G24D-2	TC-D
A0730131	GREENWAY 60cm	18W	G24D-2	TC-D
* : Built-in ! : Necessary O : Optional				

Characteristics

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	LED	LED			!			
	LED	LED			!			
	LED	LED			!		!	
	LED	LED			!			
	LED	LED			!		!	
	LED	LED			!		!	

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					

Characteristics

Garden Lights 230Vac				
Order code	Product name	Power	Socket	ZVEI
A0730132	GREENWAY 90cm	18W	G24D-2	TC-D
A0730133	GREENWAY 120cm	18W	G24D-2	TC-D
A0730141	DAYTONA-60WW	3W	pcb	LED
A0730142	DAYTONA-90WW	3W	pcb	LED
A0730151	COLORADO-60WW	7x 1W	pcb	LED
A0730152	COLORADO-90WW	7x 1W	pcb	LED
A0730161	SARASOTA-60WW	3x 1W	pcb	LED
A0730162	SARASOTA-90WW	3x 1W	pcb	LED
A0730170	NEVADA-30WW	3W	pcb	LED
A0730171	NEVADA-60WW	3W	pcb	LED
A0730205	BANFF-L WW	3W	pcb	LED
A0730207	VERMONT-L	18W + 3W	G24D-2 + pcb	TC-D + LED
* : Built-in ! : Necessary O : Optional				

Garden Lights 24Vdc				
Order code	Product name	Power	Socket	ZVEI
A0730210	DAKOTA-1	24W	2G11	TC-L
A0720006	ESSEX-5WW	5x 1W	pcb	LED
A0720007	ESSEX-15WW	5x 3W	pcb	LED
A0720008	ESSEX-15RGB	5x 3W	pcb	LED
A0730020	ABERDEEN-S RGB	3x 1W	pcb	LED
A0730021	ABERDEEN-M RGB	6x 1W	pcb	LED
A0730022	ABERDEEN-L RGB	12x 1W	pcb	LED
* : Built-in ! : Necessary O : Optional				

Special Light products				
Order code	Product name	Power	Socket	ZVEI
A1010050	GRAFIX Surface	up to 50W	GU5,3	QR-CBC51
A1011050	GRAFIX-1P	up to 50W	GU5,3	QR-CBC51
A1013050	GRAFIX-3P	up to 50W	GU5,3	QR-CBC51
* : Built-in ! : Necessary O : Optional				

Characteristics

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	Duluxe D	PL-C 2p	*					
	Duluxe D	PL-C 2p	*					
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	LED	LED				*		
	Duluxe D + LED	PL-C 2p + LED	*			*		

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	Duluxe L	PL-L 4p	*					
	LED	LED			!			
	LED	LED			!			
	LED	LED			!		!	
	LED	LED			!		!	
	LED	LED			!		!	
	LED	LED			!		!	

	Osram	Philips	Ballast	Transformer	Powersupply	Driver	Controller	LED ready
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				
	Decostar 51	Brilliantline		*				

Icon Index & IP Rating

Icon Index

- Weight in Kg.
- Dimensions in mm.
- Number of channels
- Lamp (not) included
- Lumen
- Barndoor (not) included
- Filterframe (not) included
- Number of Led's
- IP Rating
- For indoor use
- Safetyclass I
- Safetyclass II
- Safetyclass III
- Suitable for mounting to normally combustible surfaces
- Surface Temperature
- Transformer
- Voltage:12V DC
- Voltage: 220-240V
- Voltage:12V AC
- Ballast (not) included
- Constant current 350mA DC
- Driver (not) included
- PSU (not) included
- Mechanical Impact in kg

IP Ratings (Ingress Protection)

IP54 = IP Letter Code ----- IP
1st Digit ---------- 5
2nd Digit ---------- 4

1st Digit	Protection from solid objects	2nd Digit	Protection from moisture
0	Non protected	0	Non protected
1	Protected against solid objects greater than 50mm	1	Protected against dripping water
2	Protected against solid objects greater than 12mm	2	Protected against dripping water when tilted up to 15°
3	Protected against solid objects greater than 2.5mm	3	Protected against spraying water
4	Protected against solid objects greater than 1.0mm	4	Protected against splashing water
5	Dust protected	5	Protected against water jets
6	Dust tight	6	Protected against heavy seas
		7	Protected against the effects of immersion
		8	Protected against submersion


Note: EN 60529 does not specify sealing effectiveness against the following: mechanical damage of the equipment; the risk of explosions; certain types of moisture conditions, e.g. those that are produced by condensation; corrosive vapours; fungus; vermin

ARTECTA®
THE ART OF LIGHTING

SPRING
Licht- und Tontechnik

Glärnischstrasse 68 - CH-8810 Horgen
Tel: +41 44 725 61 61 - Fax: +41 44 725 83 61
spring@showtechnic.ch

www.artecta.ch

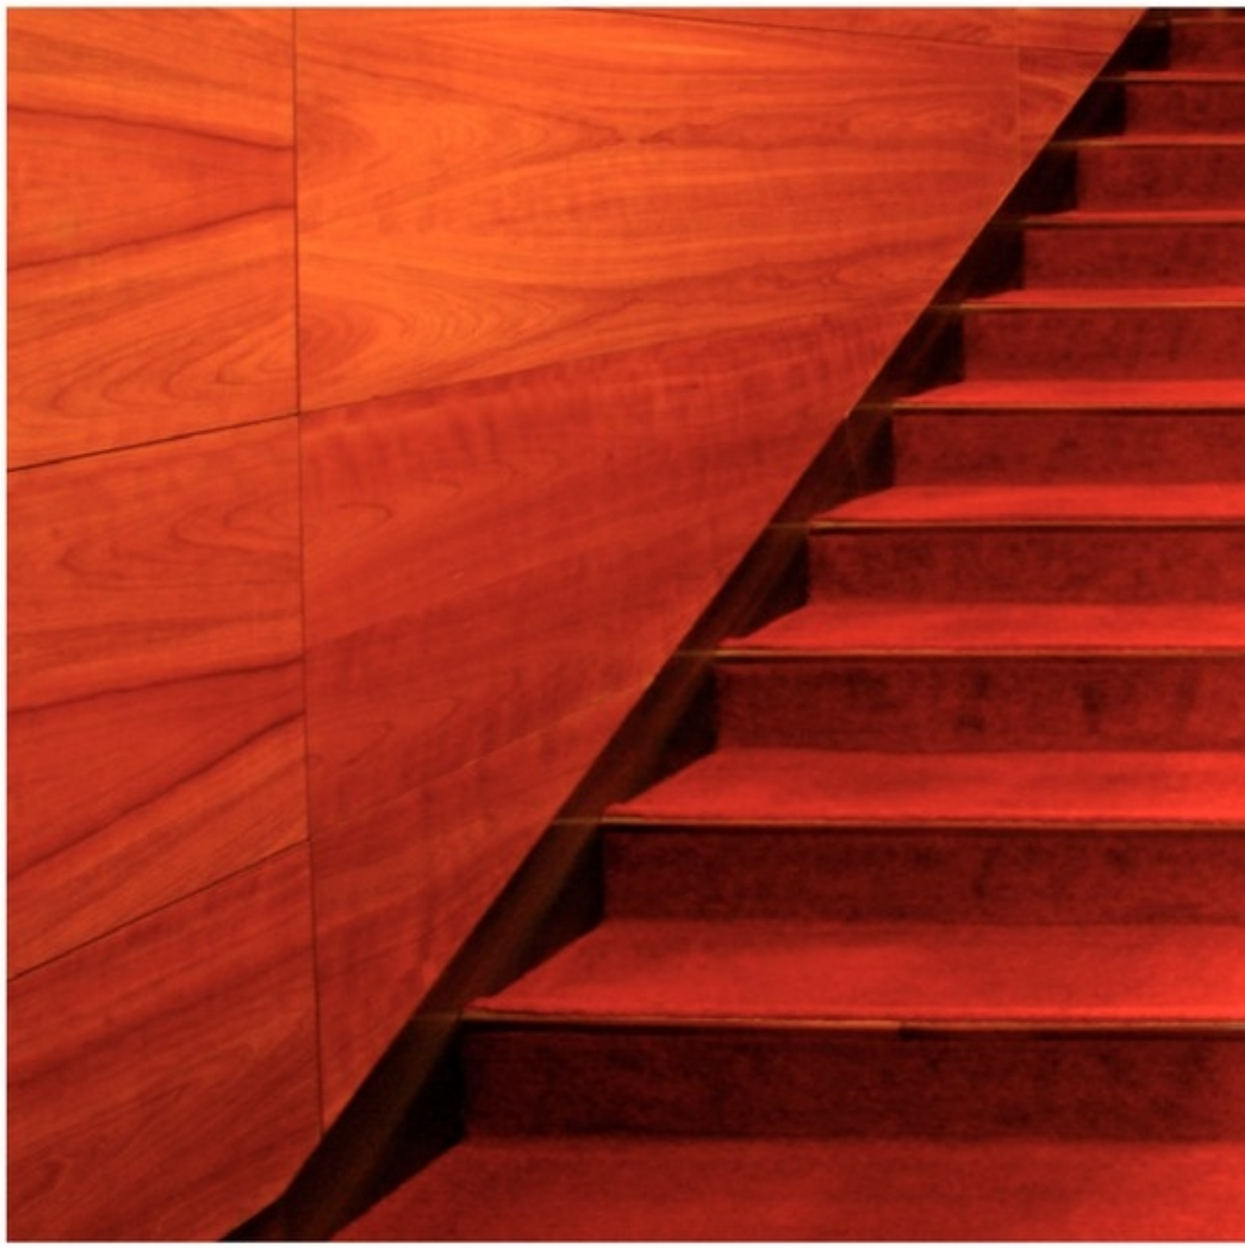

THE ART OF LIGHTING

Design & artwork by graphic-design department Highlite, Kerkrade, Netherlands. All rights reserved 2010 ©